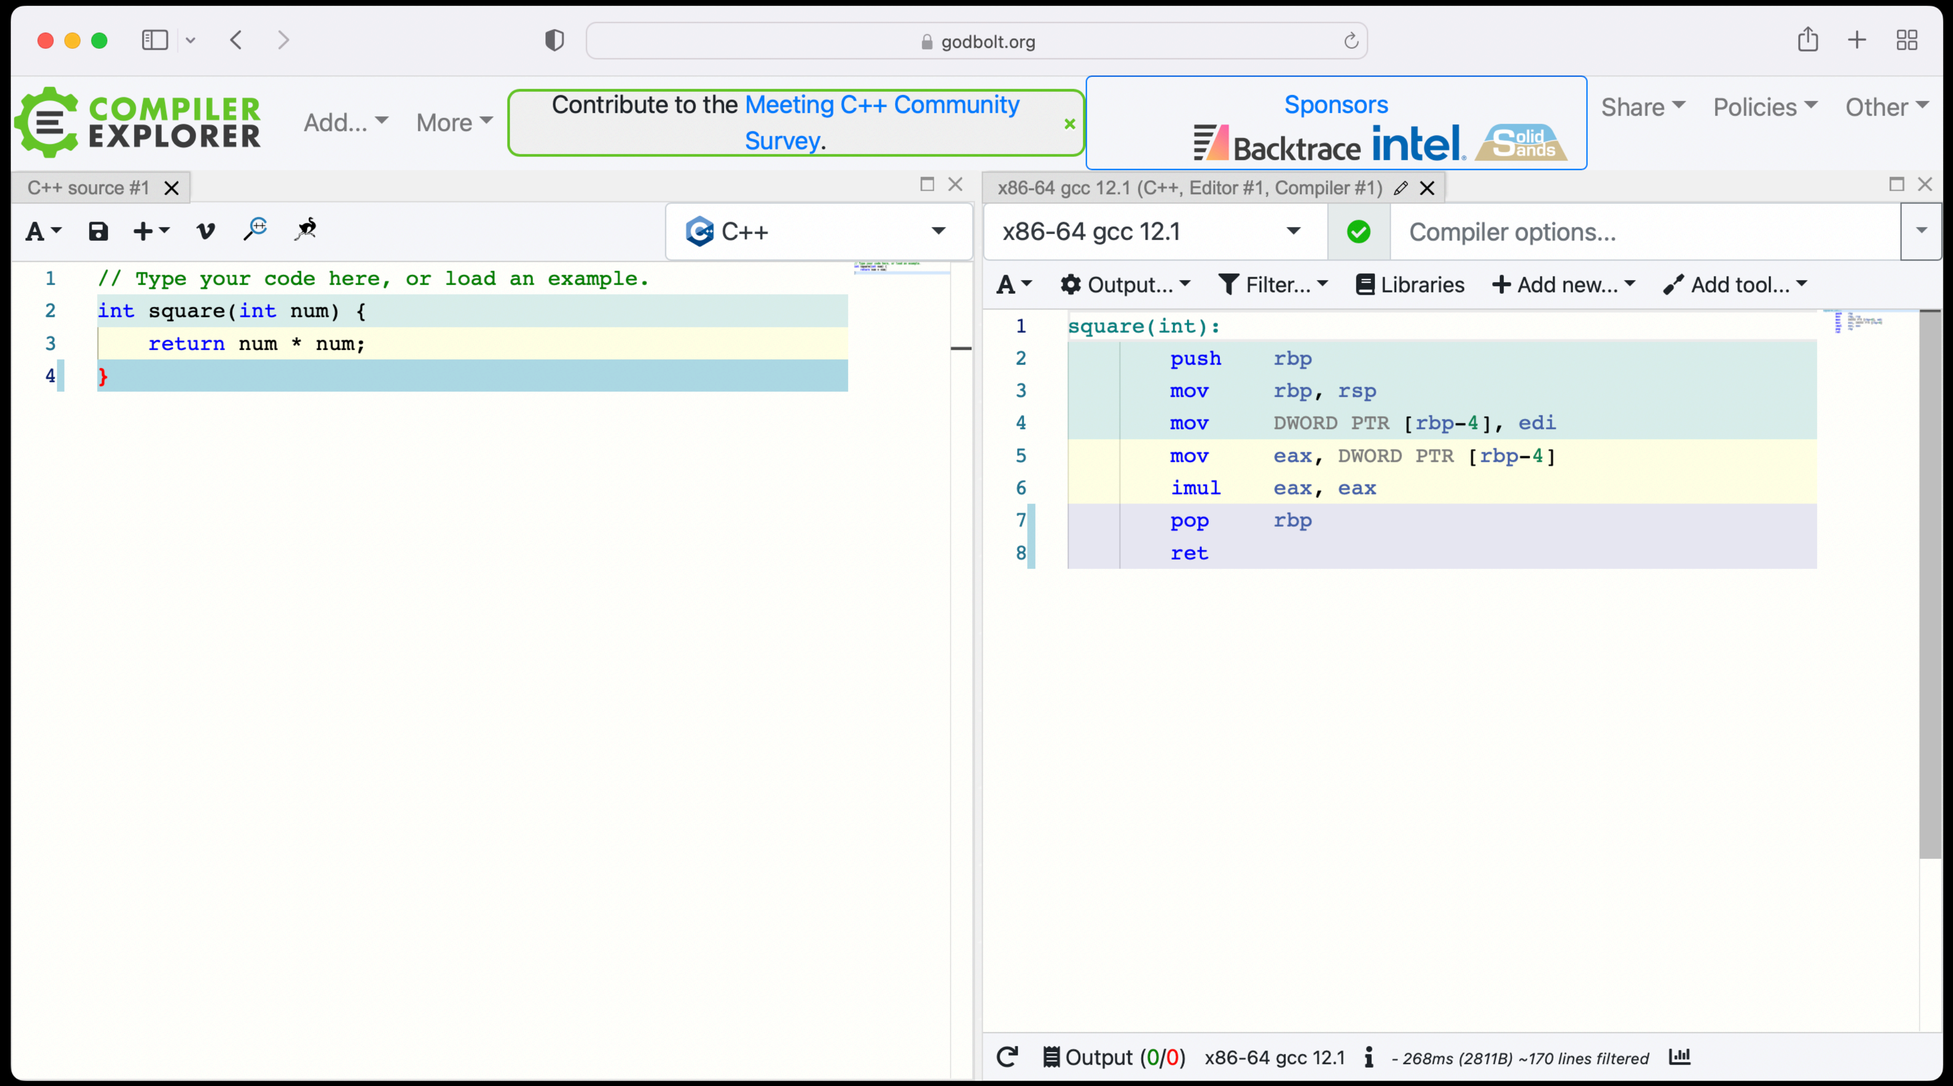
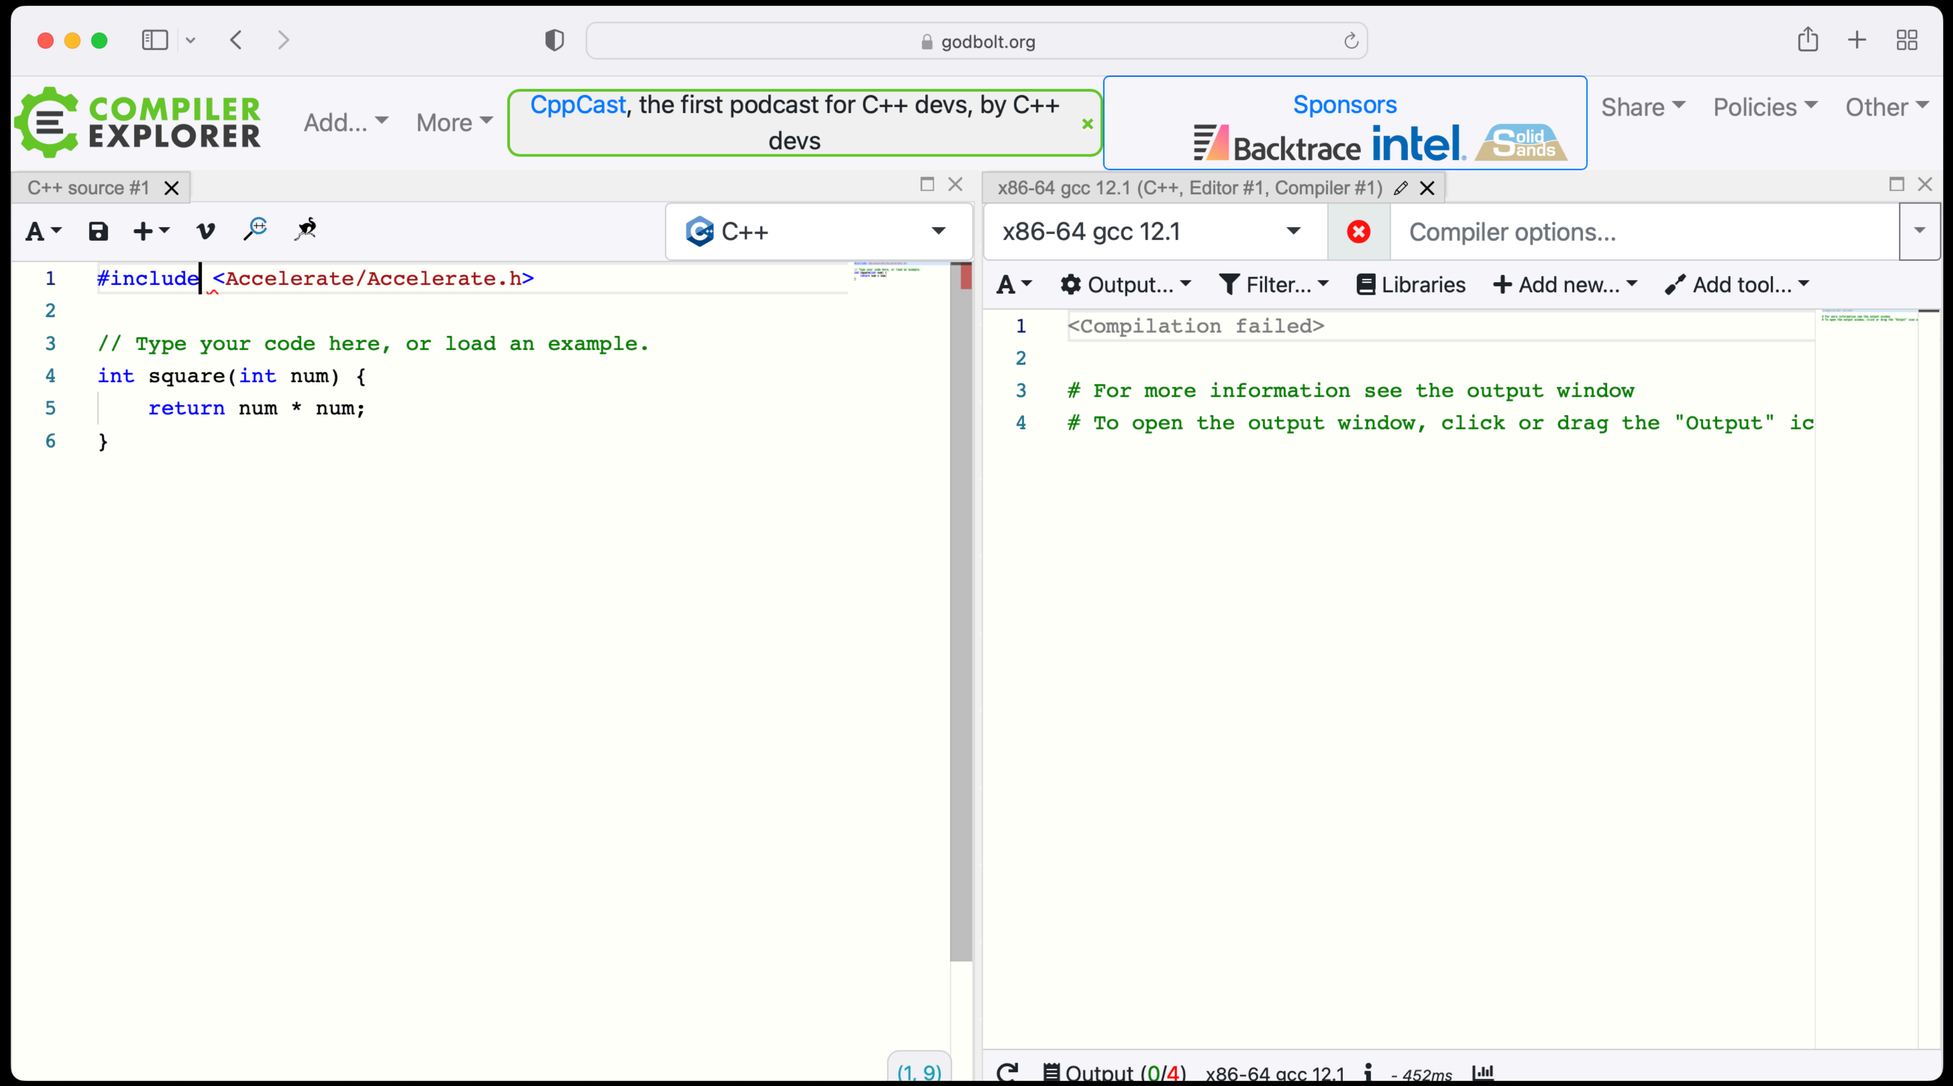
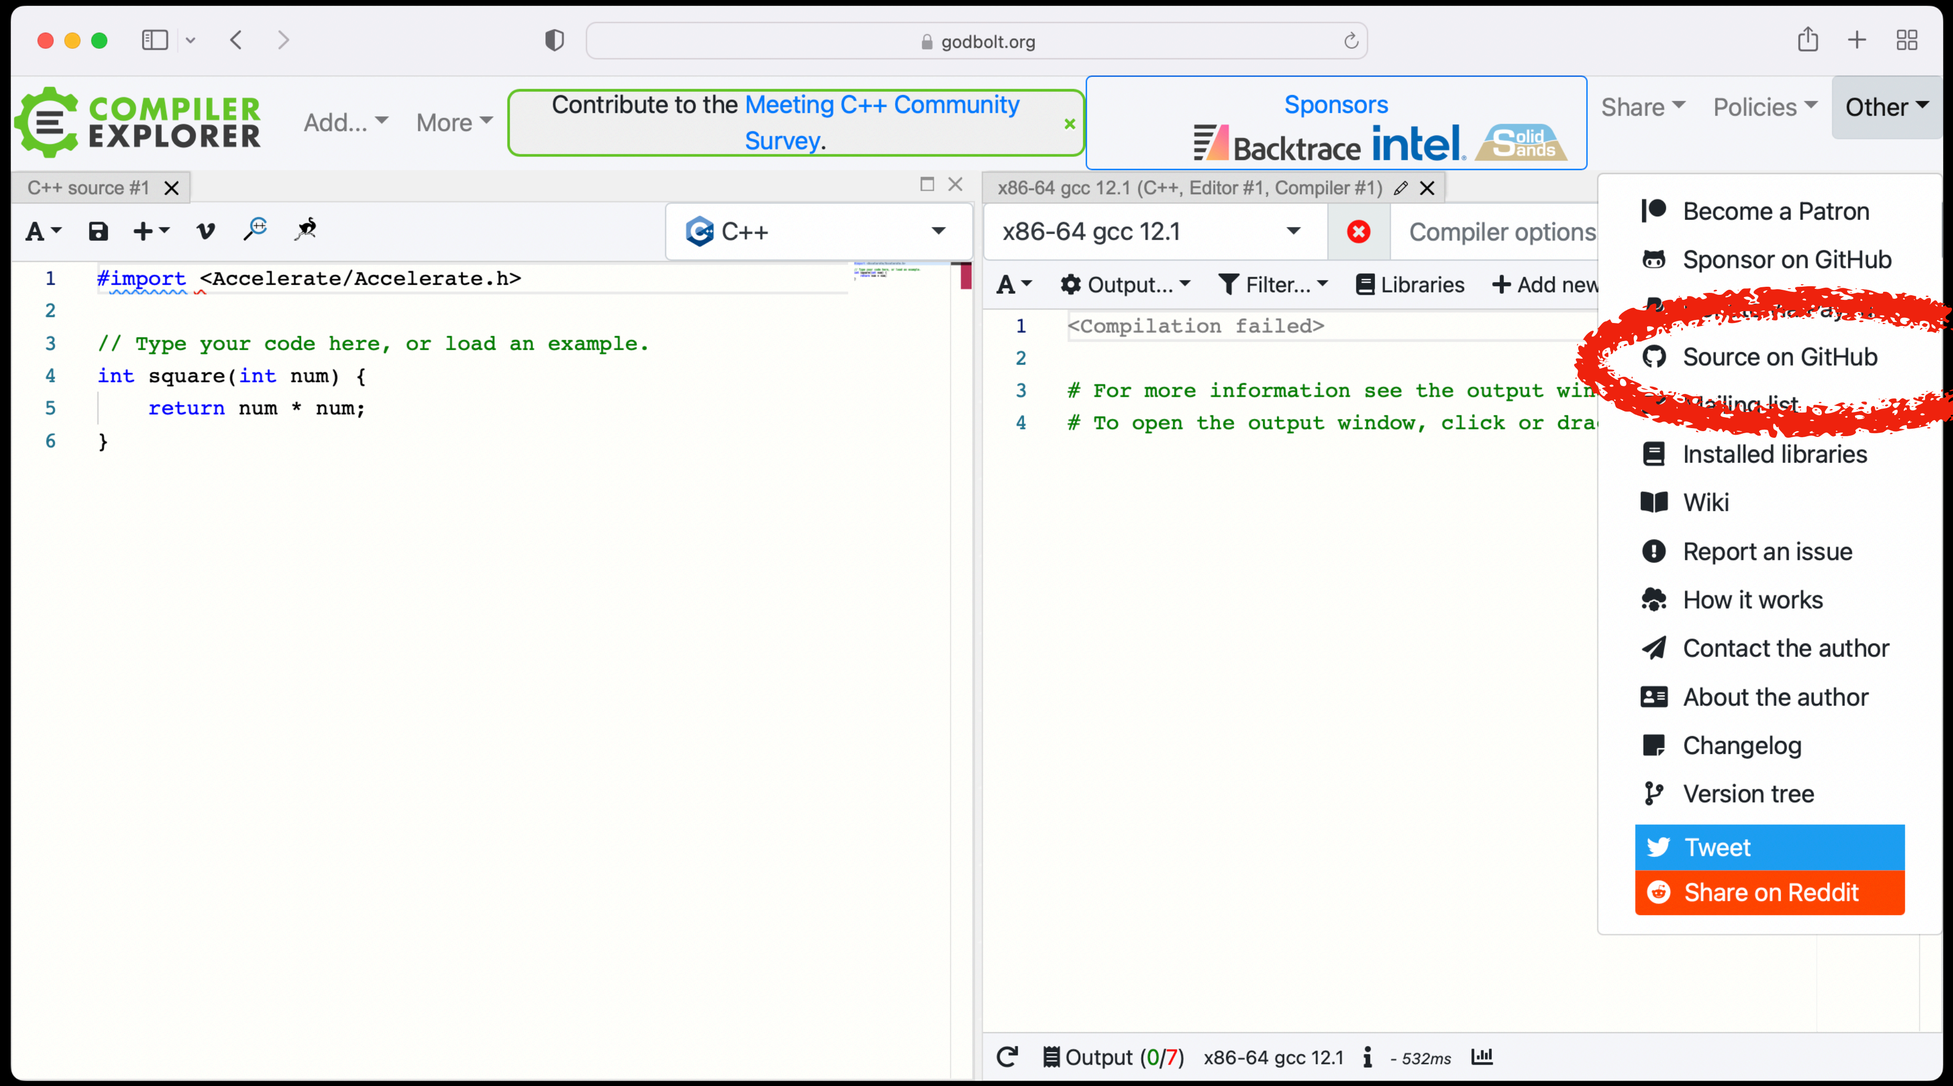
Compiler Explore

Unlocking Compiler Explorer at Home

Richard Powell (rmpowell77@me.com), 6/8/2022



godbolt.org
COMPILER EXPLORER
Add...
More
Contribute to the Meeting C++ Community Survey.
Sponsors
Backtrace
intel
Solid Sands
Share
Policies
Other
C++ source #1
C++
1 // Type your code here, or load an example.
2 int square(int num) {
3 return num * num;
4 }
x86-64 gcc 12.1 (C++, Editor #1, Compiler #1)
x86-64 gcc 12.1
Compiler options...
Output...
Filter...
Libraries
Add new...
Add tool...
1 square(int):
2 push rbp
3 mov rbp, rsp
4 mov DWORD PTR [rbp-4], edi
5 mov eax, DWORD PTR [rbp-4]
6 imul eax, eax
7 pop rbp
8 ret
Output (0/0) x86-64 gcc 12.1 - 268ms (2811B) ~170 lines filtered


godbolt.org
COMPILER EXPLORER
Add...
More
CppCast, the first podcast for C++ devs, by C++ devs
Sponsors
Backtrace
intel
Solid Sands
Share
Policies
Other
C++ source #1
C++
x86-64 gcc 12.1 (C++, Editor #1, Compiler #1)
x86-64 gcc 12.1
Compiler options...
Output...
Filter...
Libraries
Add new...
Add tool...
#include <Accelerate/Accelerate.h>
// Type your code here, or load an example.
int square(int num) {
return num * num;
}
<Compilation failed>
For more information see the output window
To open the output window, click or drag the "Output" ic
(1, 9)
Output (0/4)
x86-64 gcc 12.1
- 452ms



godbolt.org
COMPILER EXPLORER
Add...
More
Contribute to the Meeting C++ Community Survey.
Sponsors
Backtrace
intel
Solid Sands
Share
Policies
Other
C++ source #1
C++
x86-64 gcc 12.1 (C++, Editor #1, Compiler #1)
x86-64 gcc 12.1
Compiler options
Output...
Filter...
Libraries
Add new
#import <Accelerate/Accelerate.h>
// Type your code here, or load an example.
int square(int num) {
return num * num;
}
<Compilation failed>
For more information see the output win
To open the output window, click or dra
Become a Patron
Sponsor on GitHub
Source on GitHub
Installed libraries
Wiki
Report an issue
How it works
Contact the author
About the author
Changelog
Version tree
Tweet
Share on Reddit
Output (0/7)
x86-64 gcc 12.1
- 532ms

Step 1: Install Brew

- https://brew.sh

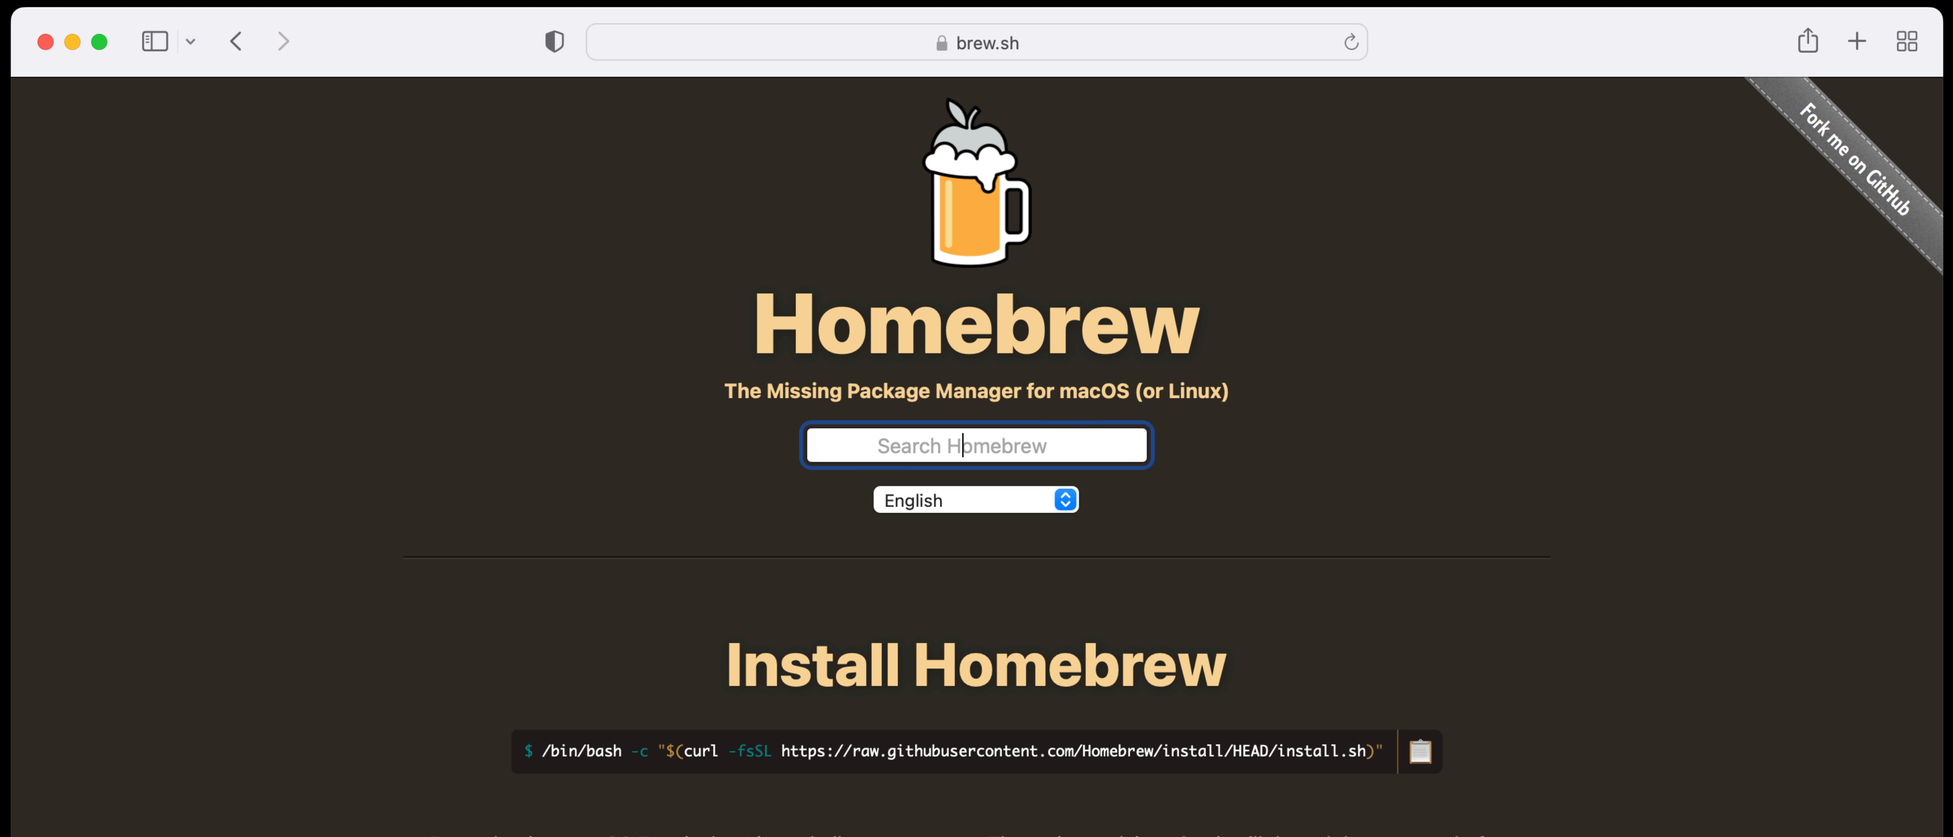


Step 2: Install node

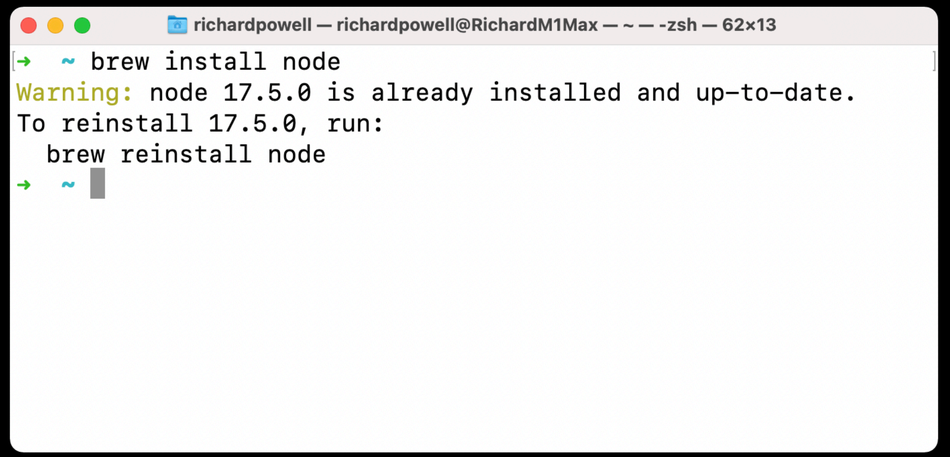


Step 3: Clone Compiler Explorer


- https://github.com/compiler-explorer/compiler-explorer

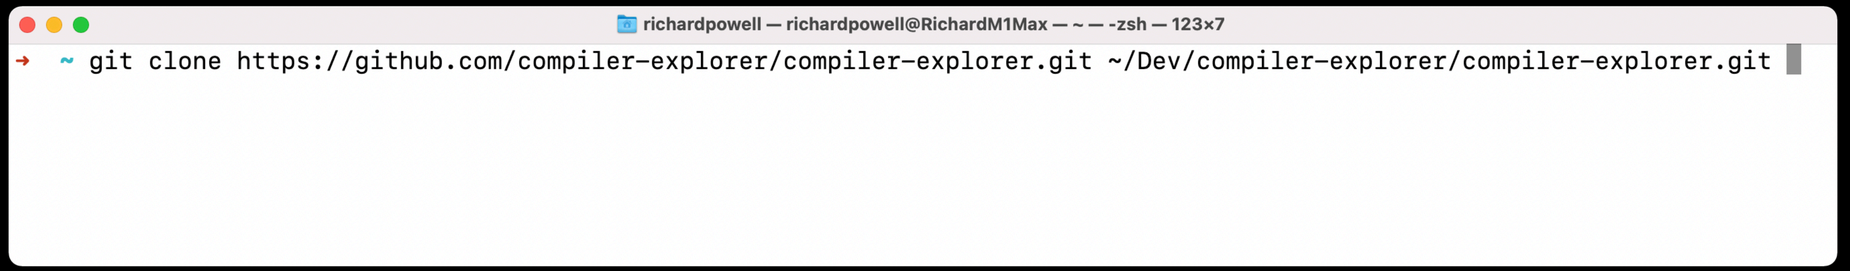


Step 4: Run local instance

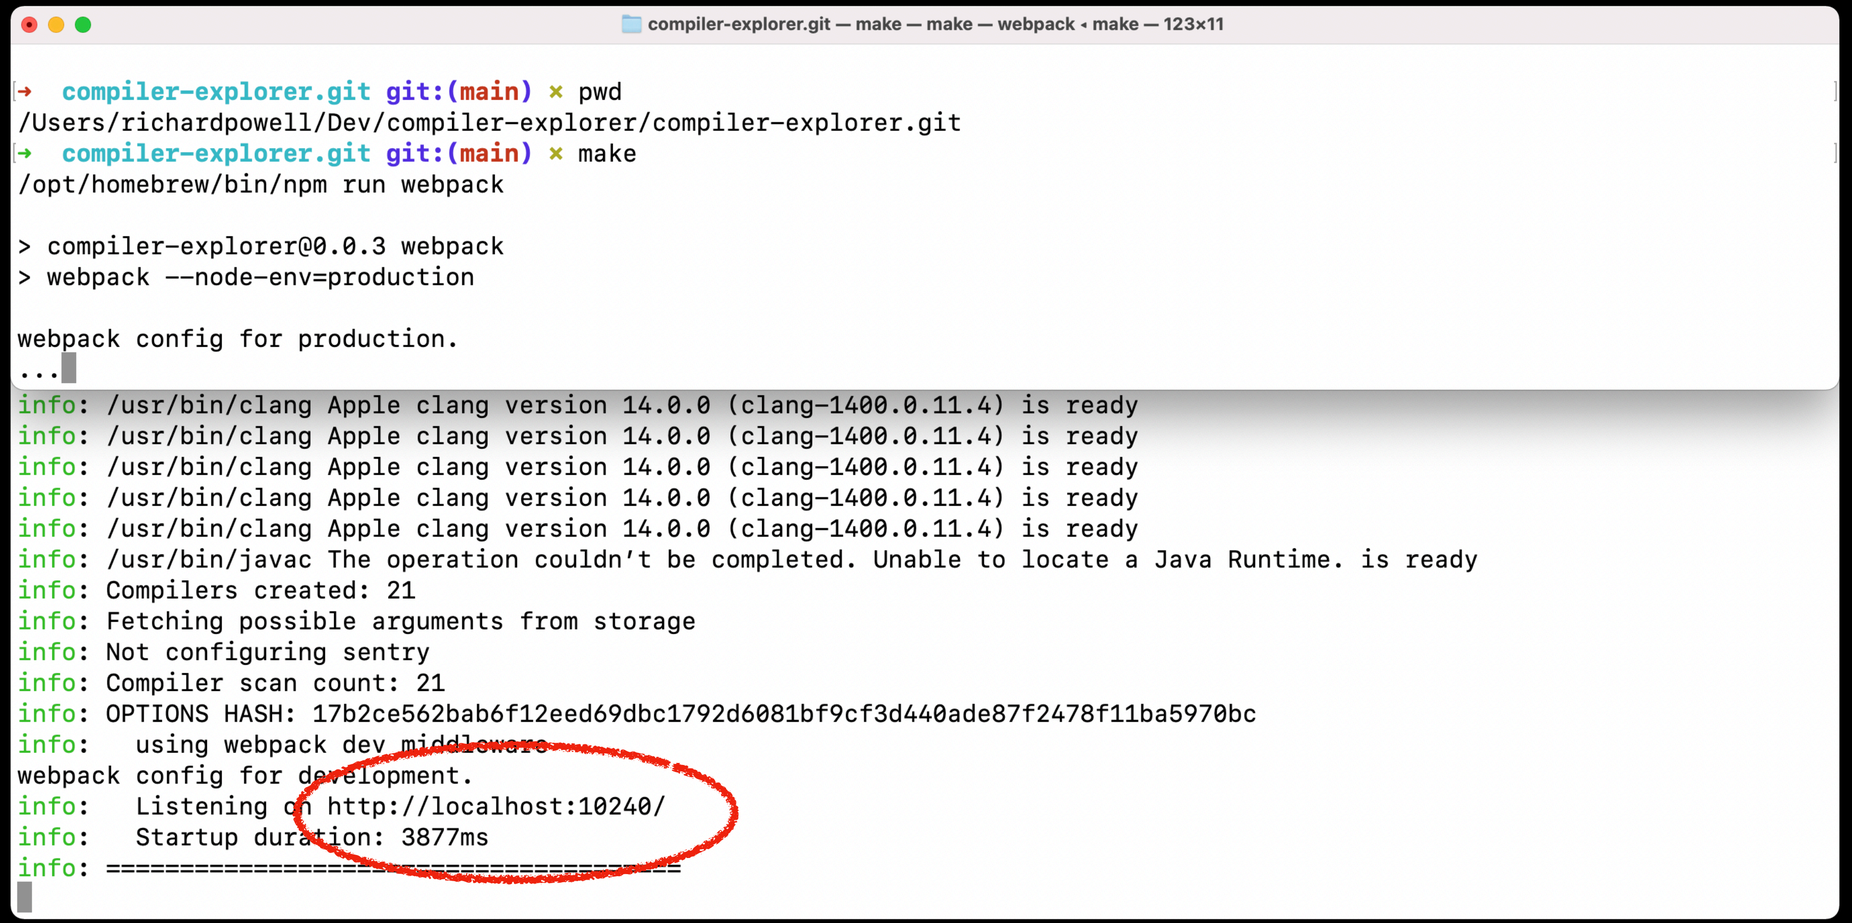

Step 5: Allow node.js incoming connections

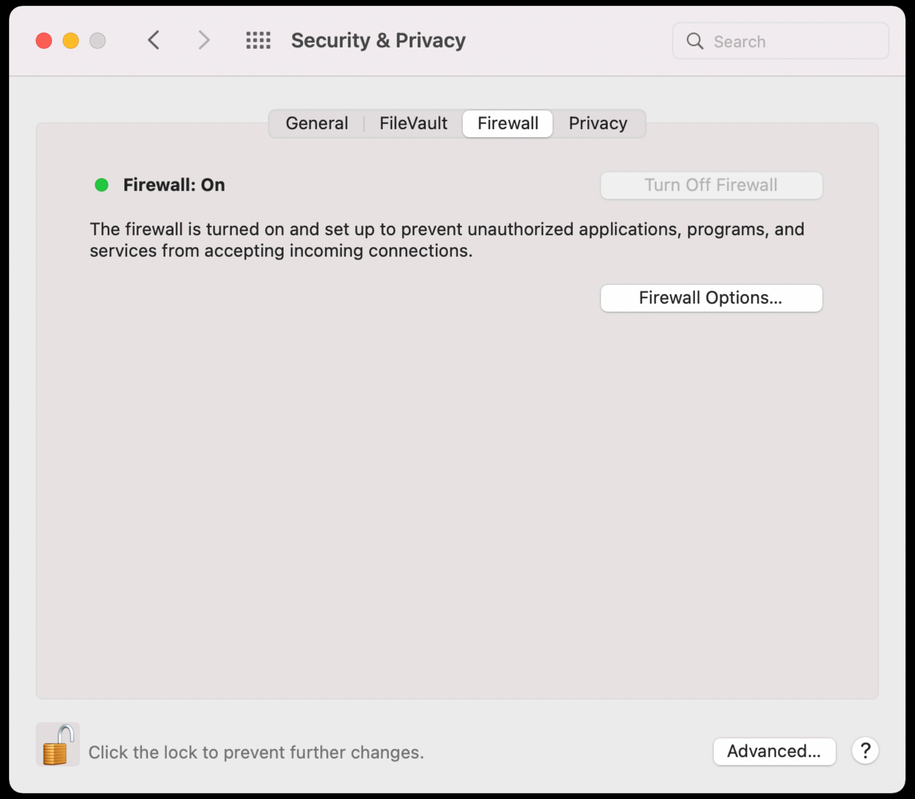


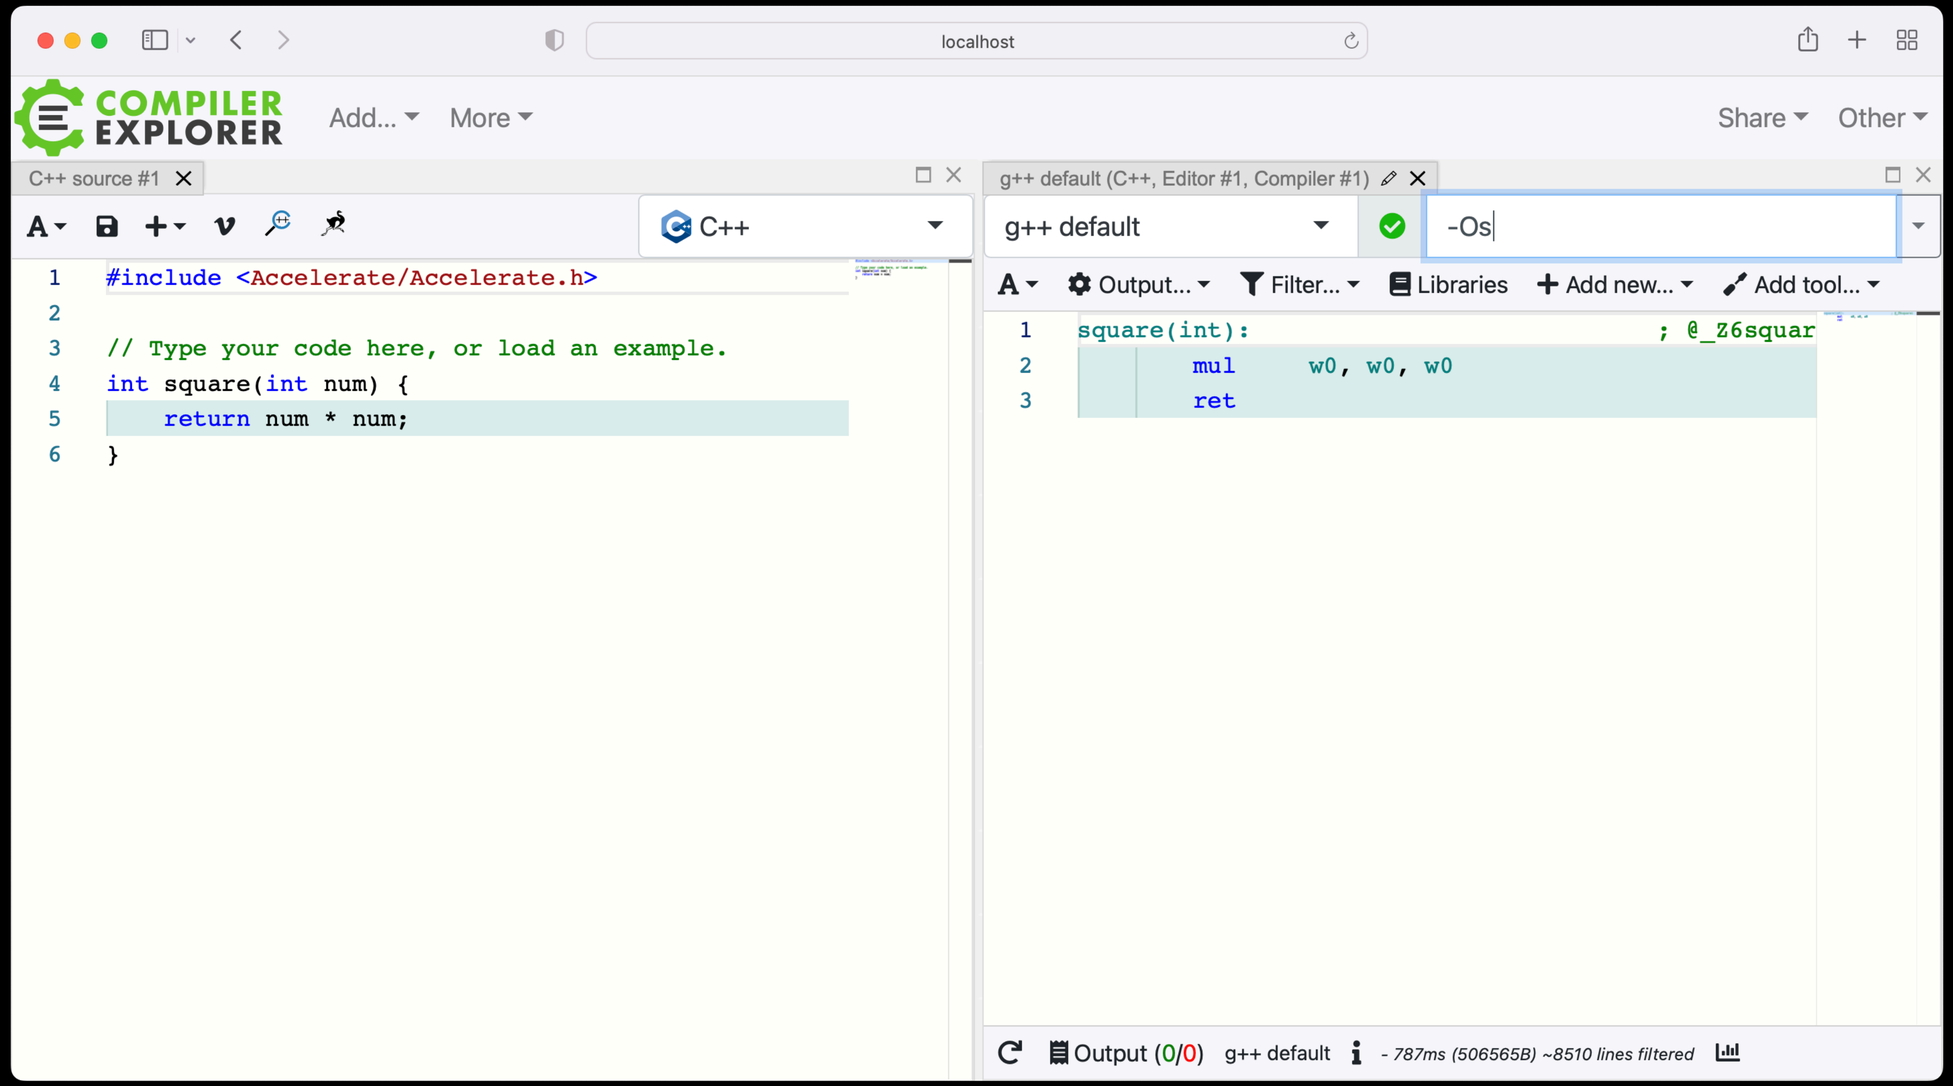


localhost
COMPILER EXPLORER
Add...
More
Share
Other
C++ source #1
C++
1 #include <Accelerate/Accelerate.h>
2
3 // Type your code here, or load an example.
4 int square(int num) {
5 return num * num;
6 }
g++ default (C++, Editor #1, Compiler #1)
g++ default
-Os
Output...
Filter...
Libraries
Add new...
Add tool...
1 square(int): ; @_Z6squar
2 mul w0, w0, w0
3 ret
Output (0/0)
g++ default
- 787ms (506565B) ~8510 lines filtered

Step 7: (extra) Using Local Clang

- Edit <CompilerExplorer>/etc/config/c++.defaults.properties to add a specialized version of Clang.

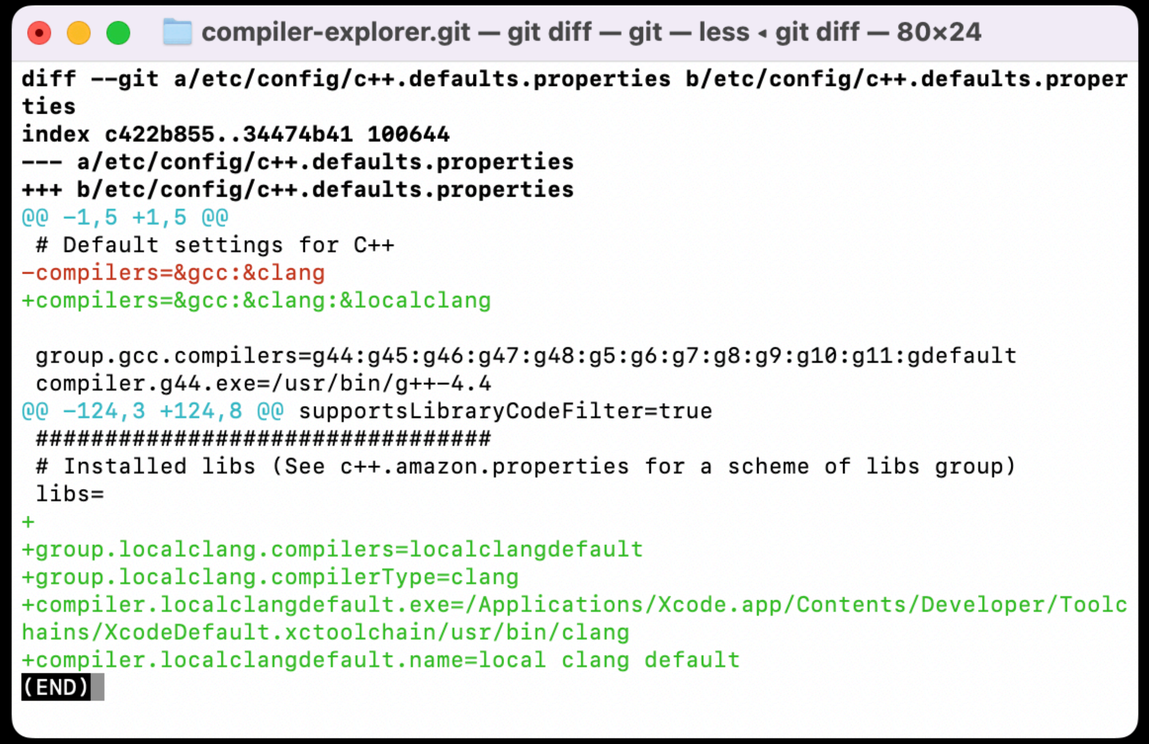


Step 7: (extra) Using Local Clang

- Edit <CompilerExplorer>/etc/config/c++.defaults.properties to add a specialized version of Clang.

```
echo -e
"\ngroup.localclang.compilers=localclangdefault\ngroup.localc
lang.compilerType=clang\ncompiler.localclangdefault.exe=`xcru
n -f --sdk macosx
clang`\ncompiler.localclangdefault.name=local clang default"
>> etc/config/c++.defaults.properties


sed -i '' '/^compilers=/s/$/:\&localclang/'  etc/config/c+
+.defaults.properties
```

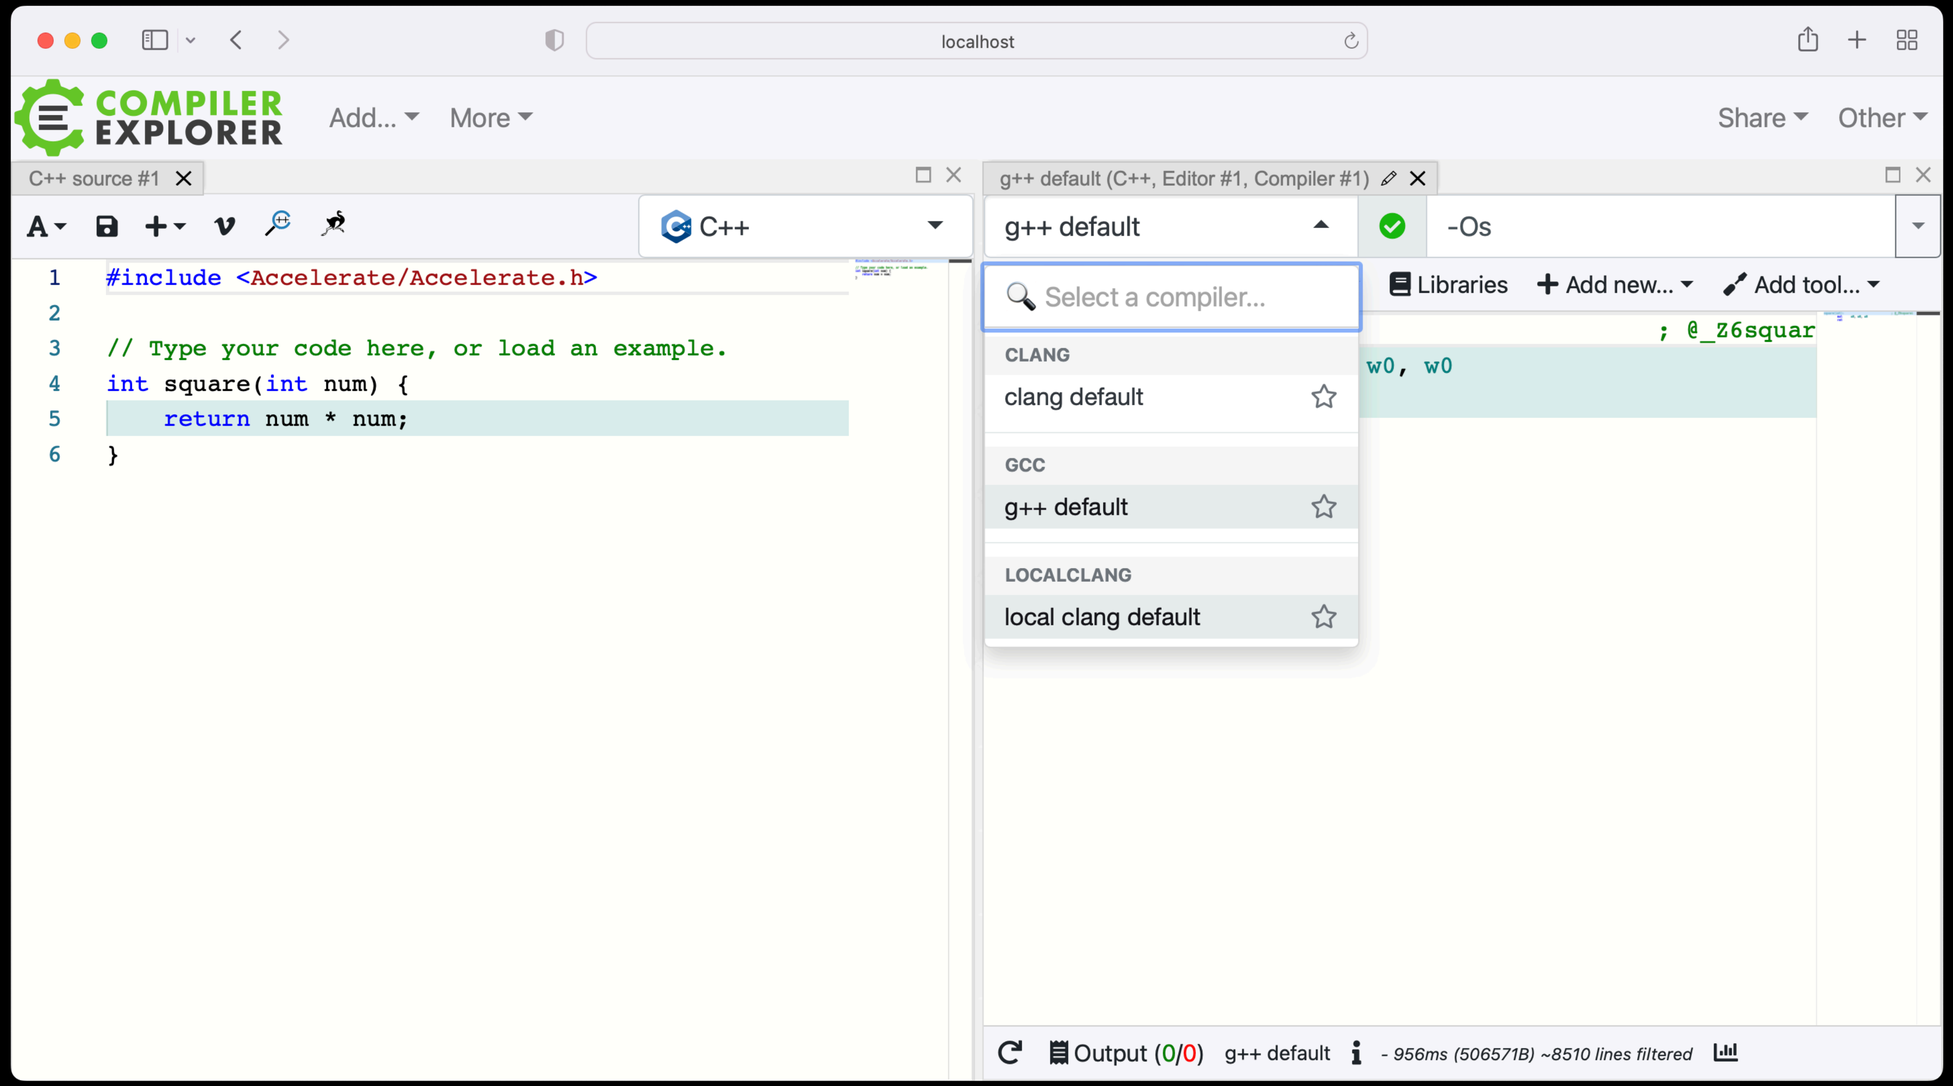
localhost
COMPILER EXPLORER
Add...
More
Share
Other
C++ source #1
C++
1 #include <Accelerate/Accelerate.h>
2
3 // Type your code here, or load an example.
4 int square(int num) {
5 return num * num;
6 }
g++ default (C++, Editor #1, Compiler #1)
g++ default
-Os
Libraries
Add new...
Add tool...
Select a compiler...
CLANG
clang default
GCC
g++ default
LOCALCLANG
local clang default
; @_Z6squar
w0, w0
Output (0/0)
g++ default
- 956ms (506571B) ~8510 lines filtered