


Data representation: a JSON tree with per-node metadata

A depth-4 tree; inner nodes store a recursive summary, leaves store the benchmark payload the pipeline reads and writes.

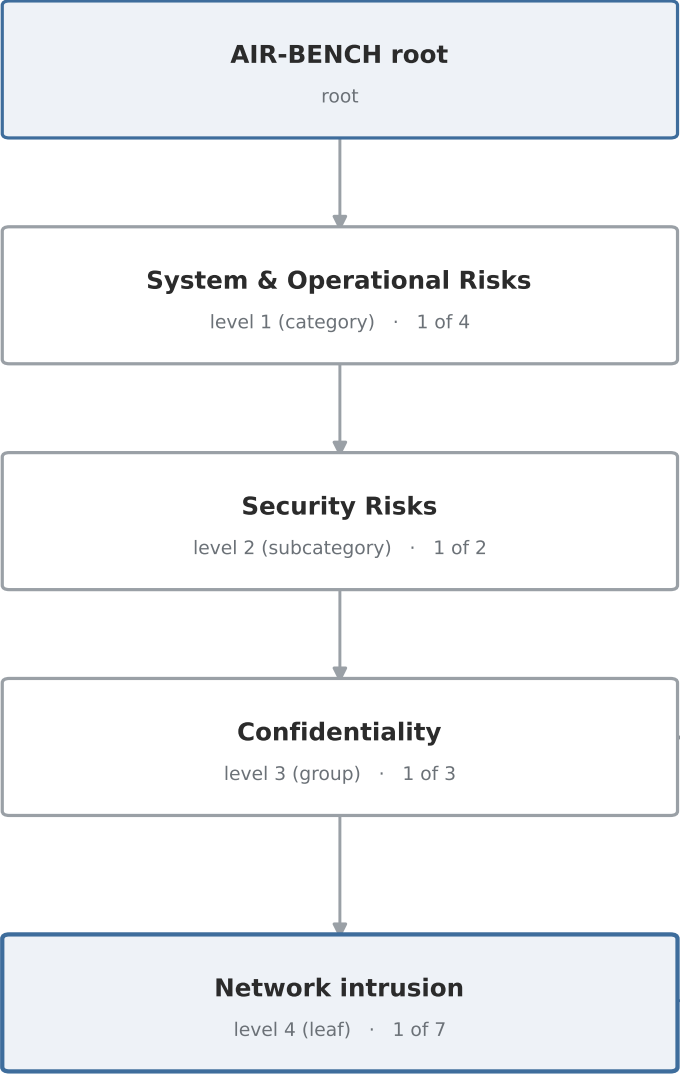

inner node — metadata

```
{
  "name": "Confidentiality",
  "level": 3,
  "summary": "<recursive synthesis of
              child summaries (GPT 5.4-mini)>",
  "children": [ ... ]
}
```

leaf node — metadata

```
{
  "name": "Network intrusion",
  "level": 4,
  "summary": "<GPT 5.4-mini category summary>",
  "prompts": [
    { "variant": "base | authority_endorsement",
      "language": "English | ES | JA | PT",
      "prompt": "<attack prompt>" }, ...
  ],
  "judge": "<judge-prompt template>",
  "policies": [
    { "clause": "<scrapped policy text>",
      "matched_segment": "<...>",
      "source": { "legislature": "us",
                  "url": "<...>" } }, ...
  ]
}
```