

UC 3- Delete Item

Design Decisions

Frontend Decisions


The default pages for the application on the staff side are the order pages because we felt these are the pages the staff will interact with the most. In addition to the order pages, we added the following tabs: Orders, Inventory, Recipes, Ingredients, and Items to fulfill all our use cases on the staff side. The delete items path and display are almost the same as the add ingredients path because we believe consistency in a system is important. We use color, words, and symbols for success and error messages to accommodate visually impaired users.

Backend Decisions

The path is very similar to adding an ingredient to the menu. This time though, all the system should need is the id of the item to remove. There is no need for any other information. This can be implemented in the ItemController class. These changes will be shown in the backend, along with other use cases, like UC2 and UC4, which revolve around the lifespan of an item on the menu. In this case, this UC would end the life of an item, deleting it from the stored repository.

Front-end Design Elements

Original Design

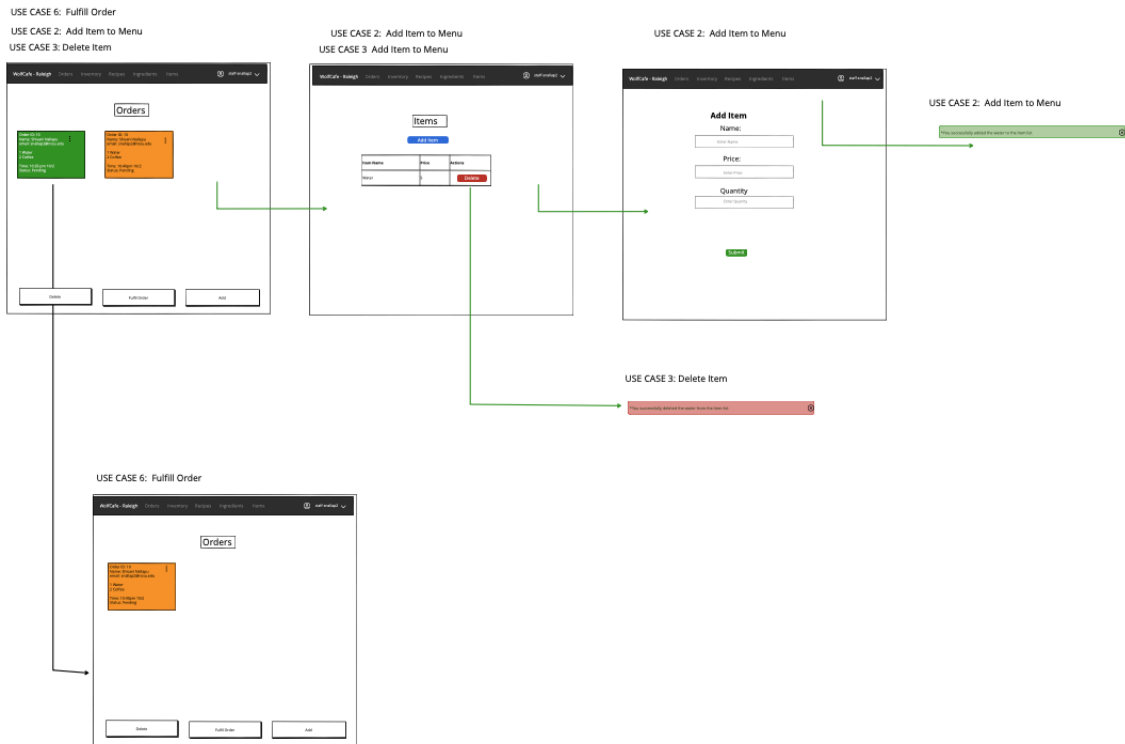

Updated Design
 (Same as original)


Changelog

- Since it's iteration 1A we did not change anything

Backend Elements

Class Diagram:

Original Design

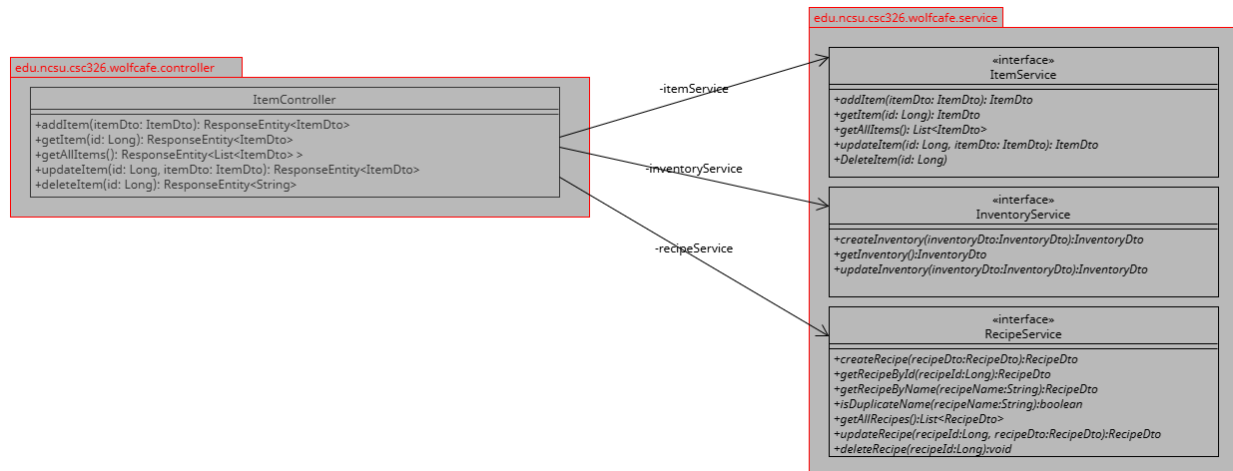


Updated Design
(Same as original)

Changelog

- Since it's iteration 1A we did not change anything

Sequence Diagram:

Original Design

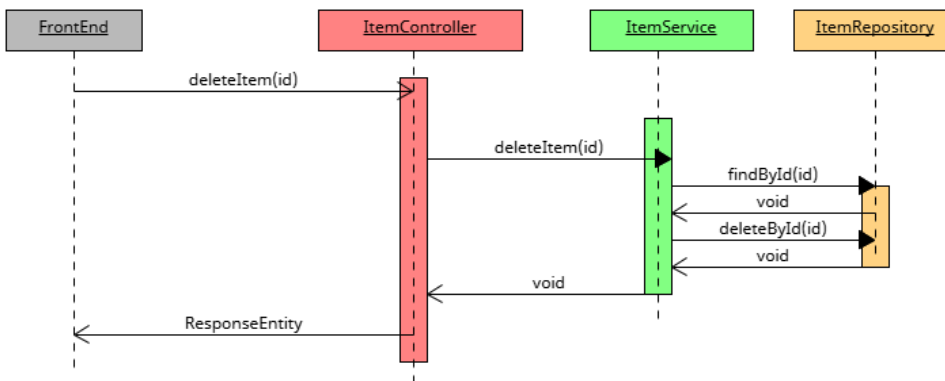

Updated Design
(Same as original)

Changelog

- Since it's iteration 1A we did not change anything