

Workshop

on

Open-Source Digital Library Software – Java CDS/ISIS (Latest version of WINISIS)

Date: 15th to 17th October 2025

Day - 02




**Resource Person – Mrs. Thasneem Niyas
Information Officer/NSF**

*Organized by
National Science Library & Resource Centre (NSLRC)
National Science Foundation
47/5 Maitland Place, Colombo 07*


Table of Contents

1. Global Add/Delete/Replace	03
2. Sorting and Printing	12
3. The Formatting Language and PFT Manager	20
4. Data migration from WINISIS/ Java ISIS to other Software	27
5. Convert WINISIS/JISIS .iso data format to MARC format	28
6. Convert JISIS MARCXML21 data format to MARC format	34
7. Convert MARC format to .csv or .xlsx data format	39
8. Convert .csv or .xlsx data format to standard MARC format	46

1. Global Add/Delete/Replace



The Global Operations Window is a tabbed window with three tabs: "Global Add", "Global Delete", and "Global Replace"

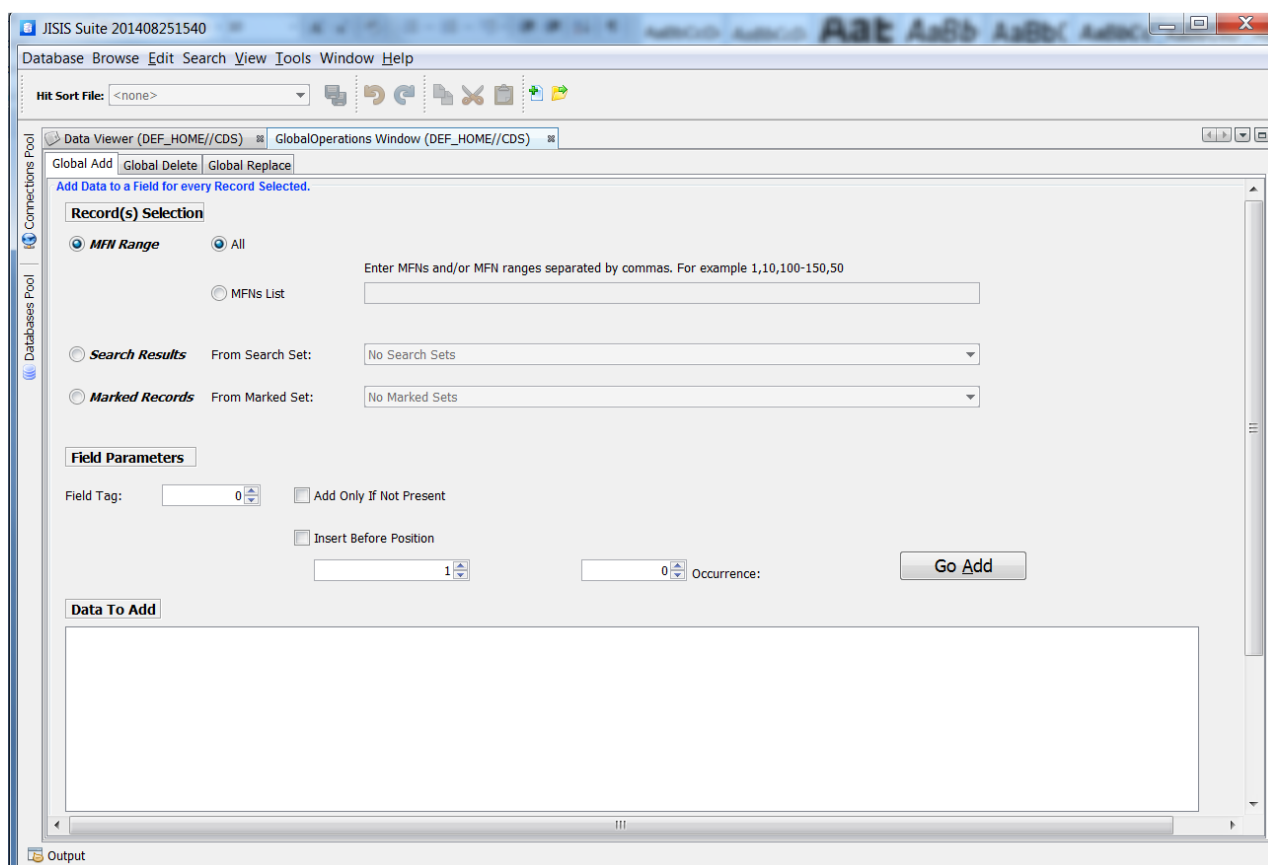

The three tabbed windows contain a form dialog to enter the respective data for each global operation.


Record(s) Selection panel (Global Add/Delete/Replace)

The records to which the operation must be applied can be specified either explicitly through the MFN range radio button or from the records retrieved in a search set, or from the records marked in a market set.


Global Add Operation

We can make a copy of the CDS database called “CDS-Clone” to experiment the global actions.


This is done by first creating a new directory called “CDS-Clone” at the same level than the CDS directory under DB_HOME and by copying all subfolders and files under CDS directory into “CDS-Clone” directory.

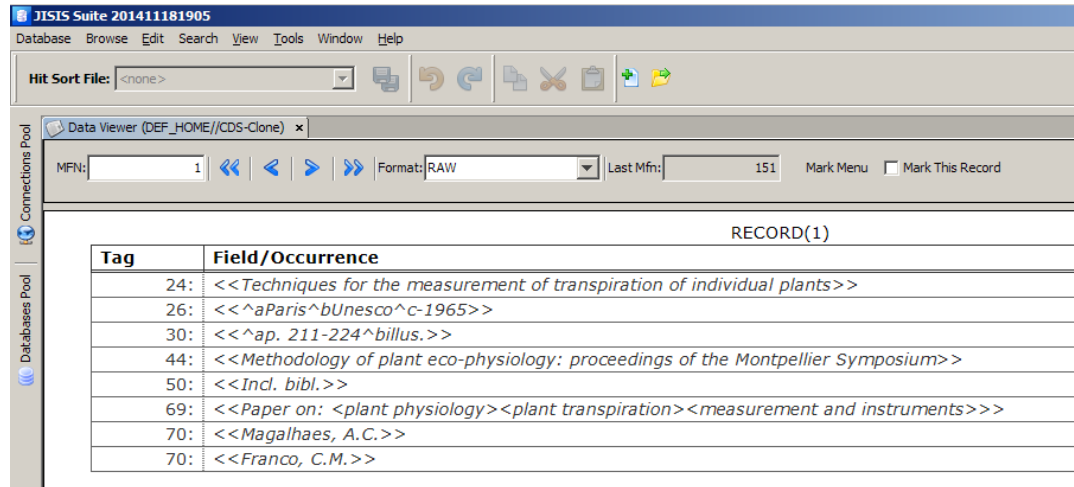

We select the **Mfns List** radio button and enter 1 as the record MFN to add field data

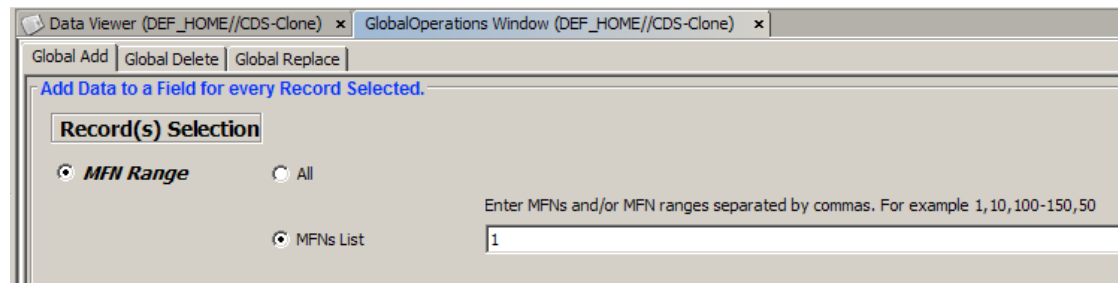


We add a new field with tag 40 and enter "**^aOccurrence 1 subfield a^bOccurrence 1 subfield b%^aOccurrence 2 subfield a^bOccurrence 2 subfield b**" as field content.

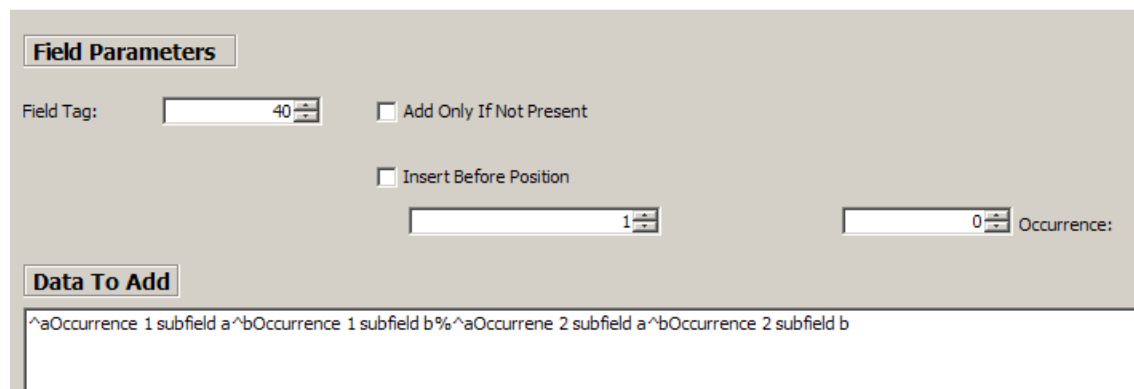


Go Add

And now clicking the Go Add button or pressing the Alt+A keys will pop up the following dialog:

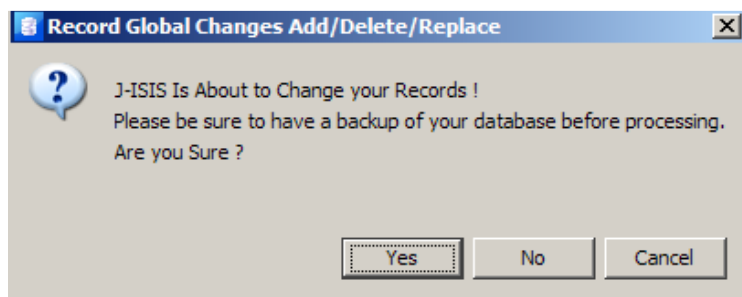

Clicking on **Yes** button runs the Global Add action on the selected records.

A progress indicator is displayed in the bottom right status bar indicating the record MFN of the record processed. The dialog below is displayed when the task is finished.

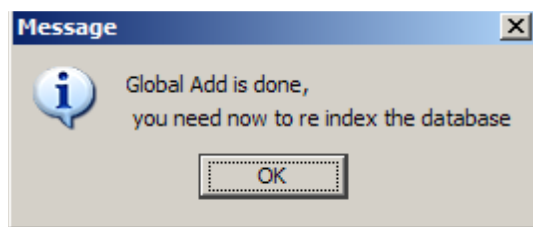

Now we can click on the **Data Viewer** Tab to check if the change is done. And as you can see in the screen shot below, record with MFN 1 has a new field with tag 40, this field has two occurrences and each occurrence has two subfields.

Data Viewer (DEF_HOME//CDS-Clone)
GlobalOperations Window (DEF_HOME//CDS-Clone)


MFN: 1
Format: RAW
Last Mfn: 151
Mark Menu
Mark This Record

Tag	Field/Occurrence
24:	<<Techniques for the measurement of transpiration of individual plants>>
26:	<<^aParis^bUnesco^c-1965>>
30:	<<^ap. 211-224^billus.>>
44:	<<Methodology of plant eco-physiology: proceedings of the Montpellier Symposium>>
50:	<<Incl. bibl.>>
69:	<<Paper on: <plant physiology><plant transpiration><measurement and instruments>>>
70:	<<Magalhaes, A.C.>>
70:	<<Franco, C.M.>>
40:	<<^aOccurrence 1 subfield a^bOccurrence 1 subfield b>>
40:	<<^aOccurrence 2 subfield a^bOccurrence 2 subfield b>>

Global Delete

Let's try now to delete the field with tag 40 from record with MFN 1.


The field that we have just added in the previous step.

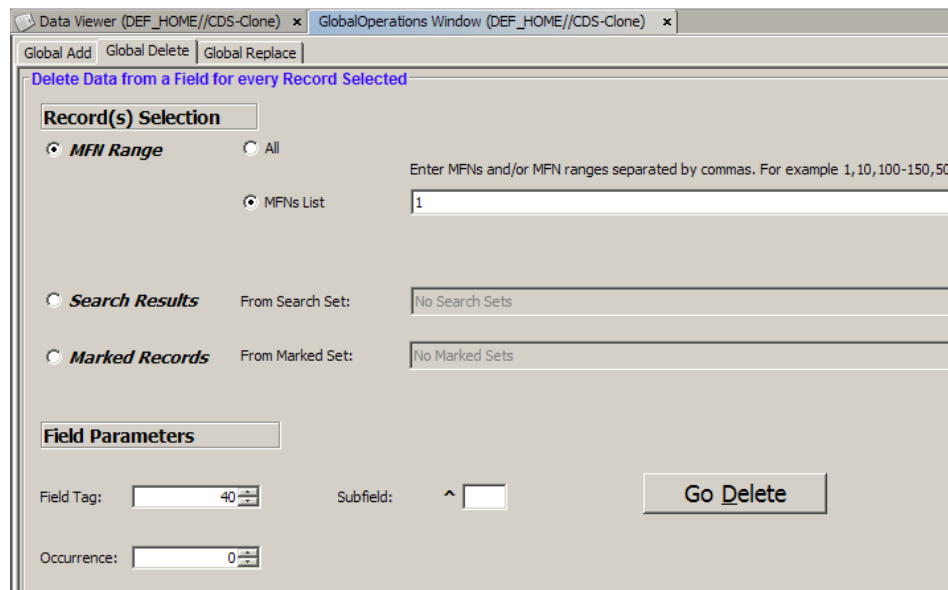


We select the **Global Delete** tab, in which we:

- i) Click the **MFNs List** radio button to select record with MFN 1;
- ii) specify Field Tag 40; and click on **Go Delete** button or press **Alt+D** keys.

The warning dialog is displayed in case you want to change your mind.

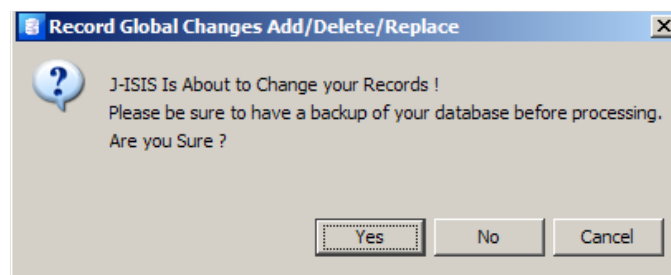

A message is displayed to indicate that the Global Delete task is finished.

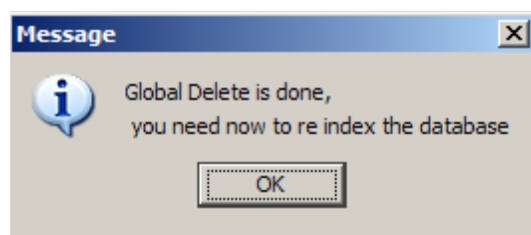

Clicking on the **Data Viewer** tab, we can check that field with tag 40 is deleted and that the record came back to its initial state.

RECORD(1)	
Tag	Field/Occurrence
24:	<<Techniques for the measurement of transpiration of individual plants>>
26:	<<^aParis^bUnesco^c-1965>>
30:	<<^ap. 211-224^billus.>>
44:	<<Methodology of plant eco-physiology: proceedings of the Montpellier Symposium>>
50:	<<Incl. bibl.>>
69:	<<Paper on: <plant physiology><plant transpiration><measurement and instruments>>>
70:	<<Magalhaes, A.C.>>
70:	<<Franco, C.M.>>

Global Replace


To demonstrate the Global Replace operation, let's try to replace the word "Techniques" by "Techniques1" into field 24 for all records.

We select the **Global Replace** tab, in which we:

- enter "Techniques" in the **Find What** box and "Techniques1" in the **Replace With** box;
- check the **Prompt On Replace** checkbox; iii) enter the field tag on which to apply the replace command; and click on **Go Replace** button or press **Alt+R** keys.

Data Viewer (DEF_HOME//CDS-Clone) x GlobalOperations Window (DEF_HOME//CDS-Clone) x	
MFN: 1	Format: RAW Last Mfn: 151 Mark Menu ☐ Mark This Record
Global Add Global Delete Global Replace	
Replace Data from Field(s) for every Selected Record	
Record(s) Selection	
☒ MFN Range ☐ All Enter MFNs and/or MFN ranges separated by commas. For example 1,10,100-150,50 ☐ Mfns List	
☐ Search Results From Search Set: No Search Sets ☐ Marked Records From Marked Set: No Marked Sets	
What to Replace	
Find What: Techniques	
Replace With: Techniques1	
Parameters	
Options ☐ Case Sensitive ☐ Whole Words Only ☒ Prompt On Replace	Scope Field Tag(s) (e.g. 100,110,120) 24 *** Subfield code(s) (e.g. abc) Occurrence(s) to which the change should be applied (e.g. 1,2,3) 0 means apply change to all occurrences
Go Replace	


The warning dialog is displayed in case you want to change your mind.

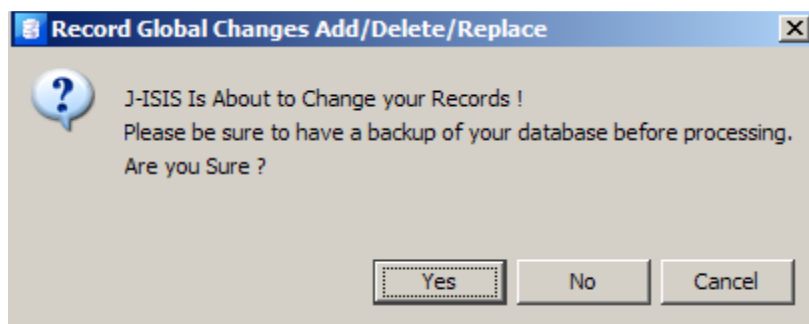


A progress indicator is displayed in the bottom right corner.




When the text to replace is found in a record a prompt dialog is displayed asking if you want to replace (the Prompt On Replace checkbox is checked otherwise the replacement would be done silently).

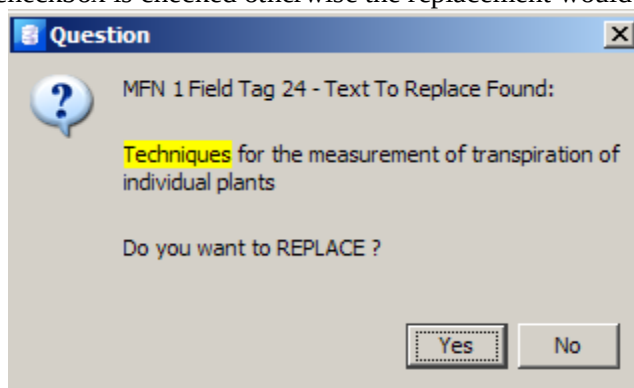

Two records contain the text to replace in this example (MFNs 1 and 92). We confirm the replacement for both of them.

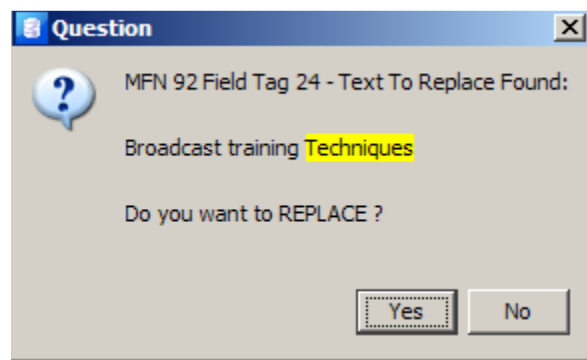

A message is displayed when the Global Replace task is finished,

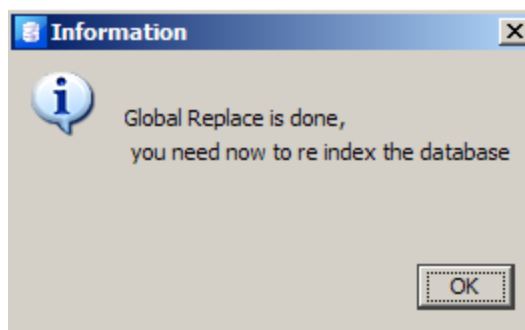



Clicking on the **Data Viewer** tab, we can see the changes for both records:

Data Viewer (DEF_HOME//CDS-Clone) x GlobalOperations Window (DEF_HOME//CDS-Clone) x	
MFN: 1	Format: RAW Last Mfn: 151 Mark Menu ☐ Mark This Record
RECORD(1)	
Tag	Field/Occurrence
24:	<<Techniques1 for the measurement of transpiration of individual plants>>
26:	<<^aParis^bUnesco^c-1965>>
30:	<<^ap. 211-224^billus.>>
44:	<<Methodology of plant eco-physiology: proceedings of the Montpellier Symposium>>
50:	<<Incl. bibl.>>
69:	<<Paper on: <plant physiology><plant transpiration><measurement and instruments>>>
70:	<<Magalhaes, A.C.>>
70:	<<Franco, C.M.>>

Data Viewer (DEF_HOME//CDS-Clone) x GlobalOperations Window (DEF_HOME//CDS-Clone) x	
MFN: 92	Format: RAW Last Mfn: 151 Mark Menu ☐ Mark This Record
RECORD(92)	
Tag	Field/Occurrence
24:	<<Broadcast training Techniques1>>
26:	<<^aParis^bUnesco Press^c1976>>
30:	<<^a122 p.^billus.^c22 cm.>>
50:	<<Incl. bibl.>>
69:	<<<communication personnel training><teaching methods><learning processes> - <teach <curriculum development><teacher guides><broadcasting><lectures><group discussions> instruction><educational environment><evaluation of education>>>
70:	<<Dance, F. Robert>>
70:	<<>>
76:	<<Técnicas de formación del personal de comunicación^zspa>>

Getting back the original values

We select the **Global Replace** tab where we have the previous step data and parameters. We just invert the content of the **Find What** and **Replace With** boxes to replace "Techniques1" by "Techniques" in field 24 of all records.

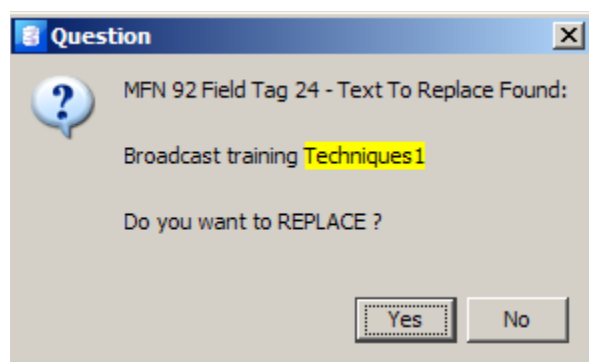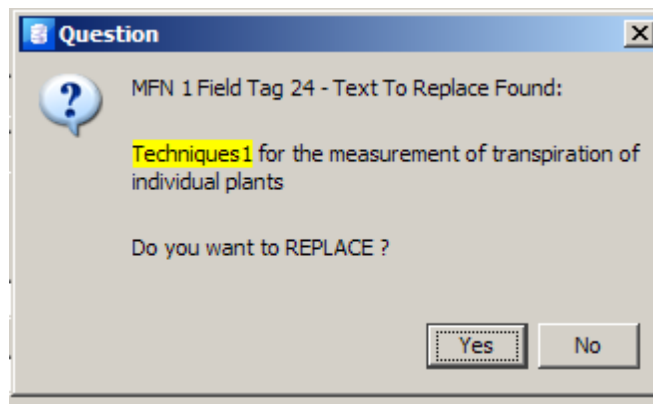


Clicking on the Data Viewer tab, we can see the changes for both records:

RECORD(1)	
Tag	Field/Occurrence
24:	<<Techniques for the measurement of transpiration of individual plants>>
26:	<<^aParis^bUnesco^c-1965>>
30:	<<^ap. 211-224^billus.>>
44:	<<Methodology of plant eco-physiology: proceedings of the Montpellier Symposium>>
50:	<<Incl. bibl.>>
69:	<<Paper on: <plant physiology><plant transpiration><measurement and instruments>>>
70:	<<Magalhaes, A.C.>>
70:	<<Franco, C.M.>>

RECORD(1)	
Tag	Field/Occurrence
24:	<<Techniques for the measurement of transpiration of individual plants>>
26:	<<^aParis^bUnesco^c-1965>>
30:	<<^ap. 211-224^billus.>>
44:	<<Methodology of plant eco-physiology: proceedings of the Montpellier Symposium>>
50:	<<Incl. bibl.>>
69:	<<Paper on: <plant physiology><plant transpiration><measurement and instruments>>>
70:	<<Magalhaes, A.C.>>
70:	<<Franco, C.M.>>

2. Sorting and Printing

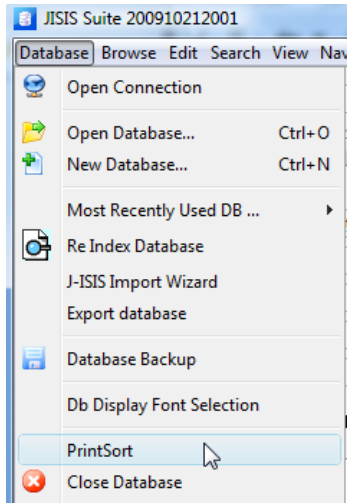

Printing can be done without sorting the database records, i.e. the records will be printed in the master file number (MFN) sequence order.

This command allows you to print all the records or to print a selected range of records.

You may sort the records by virtually any combination of fields and subfields.

Print Dialog Form Tab

Example:

Quickly Printing All or a Selected Range of Records

1. Specify which records you want to print.

You may print the whole data base or a specific range of records.

You can enter a list of MFNs and/or MFN ranges separated by commas.

For example: 1,10,100-150, 50.


You can also print records retrieved in a search set, or from the records marked in a market set.

2. **Select the print format name which defines which fields must be printed and how they should be formatted.**
3. **Give a name to the output file and select the directory where it should be stored.**

The default directory is the "...\\jisis_suite\\work"


HTML and Plain Text are the two document formats supported.

4. **Click on the “*Print*” button.**

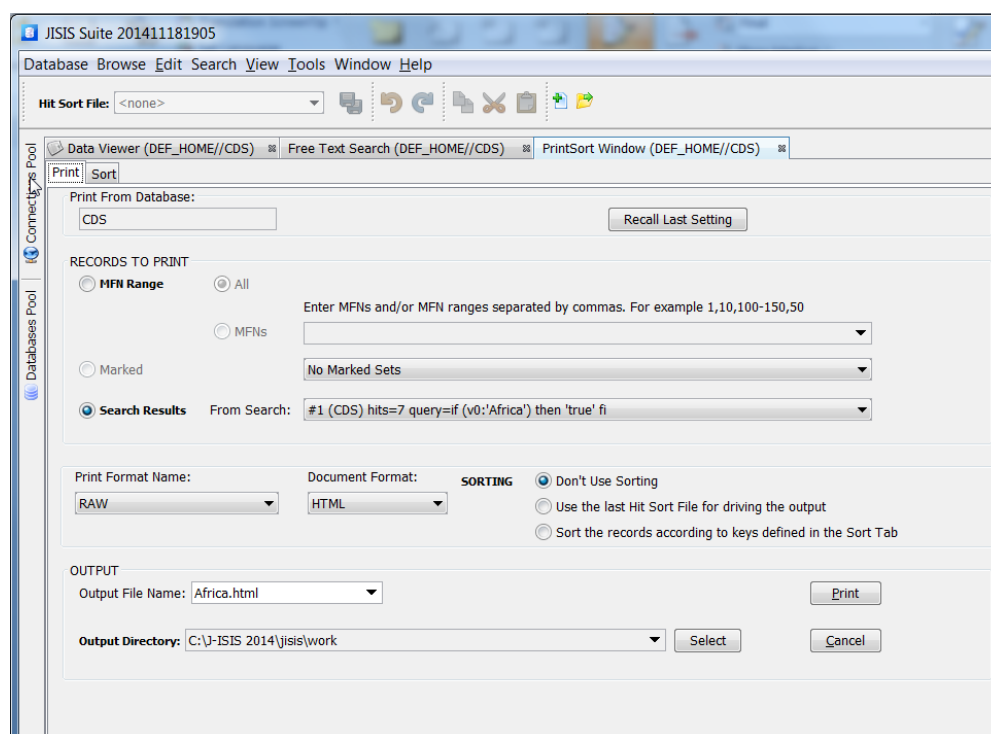

Please note the “*SORTING*” radio buttons where you can choose between “*Don't Use Sorting*”, “*Use the last Hit Sort File for driving the output*” and “*Sort the records according to keys defined in the Sort Tab*”.

J-ISIS displays the following message once printing on a disk file is done.

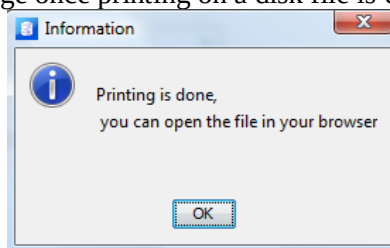

Open the output file in your favorite browser:

RECORD(78)	
24:	<<Cultural policy in the United Republic of Cameroon>>
26:	<<^aParis ^bUnesco Press^c1976>>
30:	<<^a91 p.^billus.^c24 cm.>>
44:	<<Studies and documents on cultural policies>>
50:	<<Incl. bibl.>>
69:	<<<cultural policy><Cameroon UR> - <cultural institutions><cultural planning and administration><cultural identity><higher education><political participation><education and development><literature><African languages><artistic creation><cultural activities><cultural facilities>>>
70:	<<Bahoken, J.C.>>
70:	<<Atangana, Engelbert>>
76:	<<La Politique culturelle en République unie du Cameroun^zfre>>
RECORD(94)	
24:	<<Mucheke: race, status and politics in a Rhodesian community>>
26:	<<^aParis^bUnesco^c1976>>
30:	<<^a278 p.^billus., map, plans^c24 cm.>>

Tip: You can convert the html output document into a Microsoft Word document for editing by changing the extension from "html" to "doc".

For example we can rename the Africa.html document to Africa.doc and load it into Word. And from Word, you can save it as Word doc/docx or pdf document if you wish.

Sorting the Records before Printing

Example:

You will need to click on the "Sort" tab to specify the sorting parameters. As a first example, we will sort the CDS records on subfield c of field 26 "Imprint".

The Imprint field has been defined as containing the place of publication, publisher and date of publication in the three subfields a, b, and c respectively.

See the CDS FDT below.

Tag	Name	Type	Indicators	Rep.	1st Subfi...	Subfields/Pattern
12	Conference main entry	0	☐	☐	☒	npdz
24	Title	0	☐	☐	☐	z
25	Edition	0	☐	☐	☐	
26	Imprint	0	☐	☐	☐	abc
30	Collation	0	☐	☐	☐	abc
44	Series	0	☐	☒	☐	vz
50	Notes	0	☐	☐	☐	
69	Keywords	0	☐	☐	☐	
70	Personal Authors	0	☐	☒	☐	
71	Corporate Bodies	0	☐	☒	☐	
72	Meetings	0	☐	☒	☐	npdz
74	Added Title	0	☐	☒	☐	z
76	Other language titles	0	☐	☒	☐	z

To sort all CDS records on the date of publication, we define the first sorting key inline FST and check the corresponding checkbox.

SELECTION OF RECORDS TO SORT

☒ MFN Range ☒ All Enter MFNs and/or MFN ranges separated by commas. For example 1,10,100-150,50

☐ MFNs

☐ Marked No Marked Sets

☐ Search Results From Search: No Search

HEADING Format: N° of Headings: 4 Heading Level Indentation: 4 ☒ Print With Headings

SORTING KEYS

Sort Making a Hit File

	Sorting Key	Length	Heading Proc...	FST
☒	First	15	0	26 0 V26^d
☐	Second	15	0	
☐	Third	15	0	
☐	Fourth	15	0	

Enter the FST name preceded by an at sign (@) for a pre-defined FST.
To provide an actual FST, you must enter the three components separated by a space in the following order: field identifier, indexing technique, and format
In case you need to enter a multi-line FST, separate each line with a + sign surrounded by spaces

We can now:

- Either generate a Hit Sort file that will be saved and can be re-used several times;
OR
- Going back to the "Print" tab and selecting the "Sort the records according to the keys defined in the Sort tab" radio button perform a "Sort" + "Print" operation.

We will generate a Hit Sort file, clicking on the "Sort Making a Hit File"

SELECTION OF RECORDS TO SORT

☒ MFN Range ☒ All Enter MFNs and/or MFN ranges separated by commas. For example 1,10,100-150,50

☐ MFNs

☐ Marked No Marked Sets

☐ Search Results From Search: No Search

HEADING Format: N° of Headings: 4 Heading Level Indentation: 4 ☒ Print With Headings

SORTING KEYS

Sort Making a Hit File

	Sorting Key	Length	Heading Proc...	FST
☒	First	15	0	26 0 V26^c
☐	Second	15	0	
☐	Third	15	0	


Information
Sorting is done
OK

A HIT sort file is composed by two files:


<dbasename>.hitsort
 <dbasename>.hxfsort
 stored in J-ISIS's client default working directory."....\jisis_suite\work"

You can check the <dbasename>.hitsort file content in a text editor to verify the sorting process.

In our example the file is named cds.hitsort

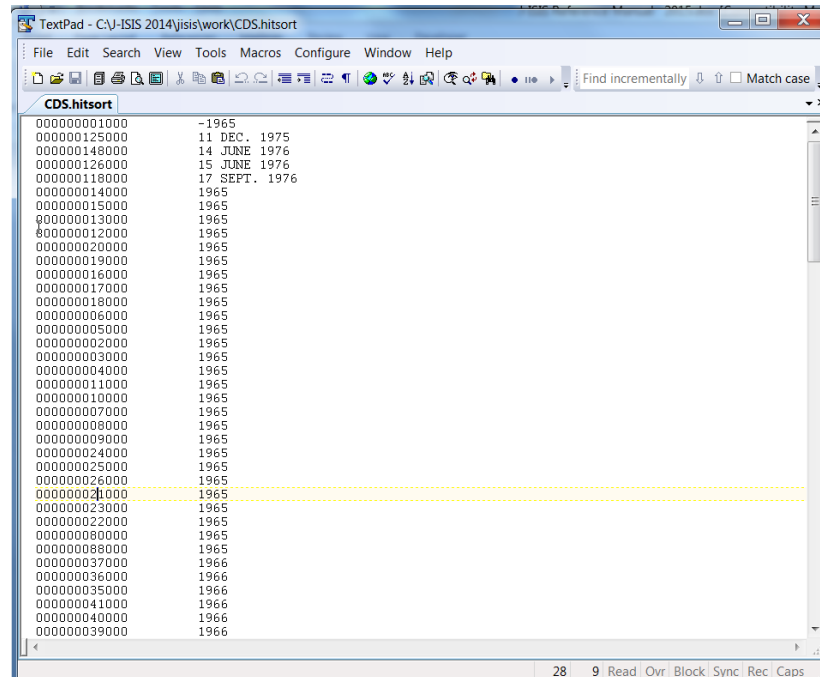

The first 9 characters gives the record MFN, then we have the sort key combinations indexes (3 x 4 characters) which are blanks for non existing sort keys, and finally we have the sort key (with default length of 15 characters).

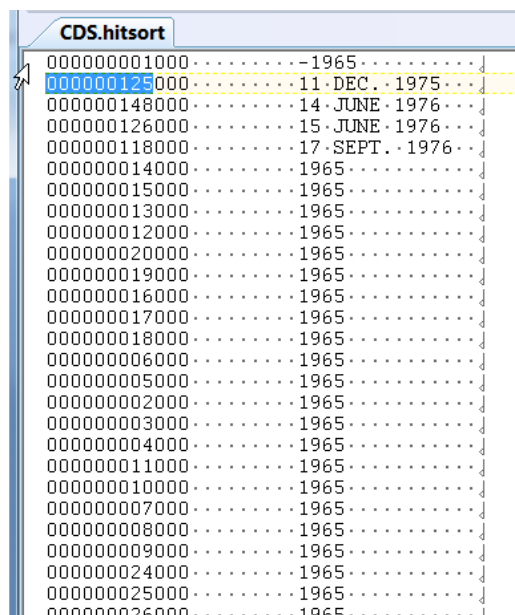

Now that we have a hit sort file, we can select the "Print" tab, click the "Use the last Hit Sort file to drive the

output" radio button, enter "SortOnDate" as output file name and click on the "Print" button.

PrintSort Window (DEF_HOME//CDS)

Print From Database: CDS [Recall Last Setting]

RECORDS TO PRINT

☐ MFN Range ☒ All

Enter MFNs and/or MFN ranges separated by commas. For example 1,10,100-150,50

☐ MFNs []

☐ Marked [No Marked Sets]

☒ Search Results From Search: [No Search]

PARAMETERS

Print Format Name: [RAW] Document Format: [HTML]

SORTING ☐ Don't Use Sorting

☒ Use the last Hit Sort File for driving the output

☐ Sort the records according to keys defined in the Sort Tab

OUTPUT

Output File Name: [SortOnDate] [Print]

Output Directory: [C:\I-ISIS 2014\isis\work] [Select] [Cancel]

This process will produce two file named SortOnDate.html and SortOnDate.pdf formatted in html and pdf format respectively.

-1965

RECORD(1)

Tag	Field/Occurrence
24:	<<Techniques for the measurement of transpiration of individual plants>>
26:	<<^aParis^bUnesco^c-1965>>
30:	<<^ap. 211-224^billus.>>
44:	<<Methodology of plant eco-physiology: proceedings of the Montpellier Symposium>>
50:	<<Incl. bibl.>>
69:	<<Paper on: <plant physiology><plant transpiration><measurement and instruments>>>
70:	<<Magalhaes, A.C.>>
70:	<<Franco, C.M.>>

11 Dec. 1975

RECORD(125)

Tag	Field/Occurrence
12:	<<Meeting between Members of National Liberation Movements in Southern Africa and Leaders of Youth Organizations^pAlgiers^d1975>>
24:	<<Final report>>
26:	<<^c11 Dec. 1975>>
30:	<<^a(11 p. in various pagings)>>
69:	<<<liberation movements><youth organizations><Southern Africa>>>
71:	<<Algeria. Ministère de la jeunesse et des sports>>

14 June 1976

RECORD(148)

Tag	Field/Occurrence
12:	<<Symposium on the Psychological Bases of Programmed Learning ^pTbilisi, USSR^d1976>>
	<<For a training project based on programmed learning in the developing countries: objectives

You can also rename the file named "SortOnDate.html" to "SortOnDate.doc" and load it into Microsoft Word for further editing. The trick is to change the Documents Views from "Web Layout" to "Print Layout".

-1965	
RECORD(1)	
Tag	Field/Occurrence
24:	<<Techniques for the measurement of transpiration of individual plants>>
26:	<<Paris^bUnesco^c-1965>>
30:	<<Ap. 211-224^billus.>>
44:	<<Methodology of plant eco-physiology: proceedings of the Montpellier Symposium>>
50:	<<Incl. bibl.>>
69:	<<Paper on: <plant physiology> <plant transpiration> <measurement and instruments>>>
70:	<<Magalhaes, A.C.>>
70:	<<Franco, C.M.>>
11 Dec. 1975	
RECORD(125)	
Tag	Field/Occurrence
12:	<<Meeting between Members of National Liberation Movements in Southern Africa and Leaders of Youth Organizations^pAlgiers^d1975>>
24:	<<Final report>>
26:	<<^c11 Dec. 1975>>
30:	<<^a11 p. in various pagings>>
69:	<<liberation movements> <youth organizations> <Southern Africa>>>
71:	<<Algeria. Ministère de la jeunesse et des sports>>
14 June 1976	
RECORD(148)	
Tag	Field/Occurrence
12:	<<Symposium on the Psychological Bases of Programmed Learning ^pTbilisi, USSR^d1976>>
24:	<<For a training project based on programmed learning in the developing countries: objectives, means and resources, organization and management, development>>
26:	<<^c14 June 1976>>
30:	<<^a18 p.>>
69:	<<educational assistance> <programmed instruction> <developing countries> - <educational innovations> <educational technology> <educational needs> <case studies> <teaching methods> <educational experiments> <technical and vocational education> <adult education> <working population> <production> <programmed materials>>>
70:	<<Pocztar, Jerry>>
15 June 1976	
RECORD(126)	
Tag	Field/Occurrence

Please note that by default the "Print With Heading" check box is activated and the "Heading Level Indentation" is set to 4 characters. You can uncheck the "Print With Heading" check box to print only the list of records.

3. The Formatting Language and PFT Manager

The J-ISIS formatting language follows CDS/ISIS formatting language syntax with some minor exceptions.

When designing a format to display data, all features offered by HTML (HTML stands for Hyper Text Markup Language) and CSS (Cascading Style Sheets) can be used by inserting **literals** with the appropriate HTML markup tags and CSS to style the HTML elements.

For example, the following format:

```
mhl,(<hr /><p style="text-align:justify; font-family:arial;font-size:20px;color:Navy;fmargin-left:20px;margin-right:40px">'v70'</p>')
```

The "WebOutput Window" shows the J-ISIS embedded browser rendering of the data extracted from records 4 and formatted according to the PFT defined in the editor.

Mode command

J-ISIS may display data in three different modes:

proof mode: in this mode, fields are displayed exactly as they are stored in the record.

Note that CDS/ISIS *does not* insert any separator between fields or occurrences of a repeatable field.

It is therefore your responsibility to ensure adequate separation of fields by using spacing commands, literals or repeatable groups.

This mode is normally used to display records for proofreading purposes.

heading mode: this mode is normally used for headings when printing catalogues and indexes.

data mode: this mode is similar to heading mode, but, in addition, each field is automatically suffixed with a full stop (.) followed by two spaces (or just two spaces if the field already ends with a punctuation mark).

When CDS/ISIS formats a subfielded field in heading or data mode it will automatically replace embedded subfield delimiters by punctuation marks (the initial subfield delimiter, if any, is always ignored).

Furthermore, the special character combination "> <" is replaced by "; " thus providing a simple way to format fields containing lists of key phrases enclosed in triangular brackets (and saving keystrokes during data entry).

The standard subfield delimiter replacement table provided is as follows:

A mode command is coded **Mmc**,

where: **m** specifies the mode as follows:

P proof mode

H heading mode

D data mode

c specifies case translation as follows:

U data are converted to upper case

L data are left unchanged

A mode command may appear as many times as necessary in a format, each remaining in effect until it is changed by a subsequent one. In the absence of an explicit mode command, CDS/ISIS will use MPL by default (proof mode, no upper case conversion).

Examples of mode commands are given in the table below.

Format	Output
mpl,v24	<An> Electric hygrometer apparatus for measuring water-vapour loss from plants in the field
mhl,v24	An Electric hygrometer apparatus for measuring water-vapour loss from plants in the field
mdl,v24	An Electric hygrometer apparatus for measuring water-vapour loss from plants in the field.
mdu,v24	AN ELECTRIC HYGROMETER APPARATUS FOR MEASURING WATER-VAPOUR LOSS FROM PLANTS IN THE FIELD.
mpl,v26	^aParis^bUnesco^cl965
mhl,v26	Paris, Unesco, 1965
mdu,v26	PARIS, UNESCO, 1965.
mpl,v69	Paper on: <hygrometers><plant transpiration><moisture><water balance>
mdl,v69	Paper on: hygrometers; plant transpiration; moisture; water balance.
mdl,v70	Grieve, B.J. Went, F.W.

Literals

A *literal* is a string of characters, enclosed between appropriate delimiters, which will be inserted *as is* in the output. Literals may be used, for example, to label fields.

Example: PFT8 format of CDS Database.

Pft Manager (DEF_HOME//cds) 

PFT: PFT8 
New Save Delete
Generate
Conv

```

1 'MFN: ',mfn(3)/mdl,"Title: "v24(0,7)/
2 'MFN: ',mfn(3)/mdl,"Title: ",mdu,v24(0,7)/
3 'MFN: ',mfn(3)/mdu,"Title: ",v24(0,7)/mdl
4 v70/
5 v70|; | /
6 v70+|; | /
7 |; |v70/
8 |; |+v70/
9 "Authors"/v70(3,3)+|; |#
10 "(by: "v70+|; |)"#
11 mdl,v26/
12 mdl,v26"/
13 mdl,v26,""/#v99,v30^a/
14 mdl,v26,""/#v44|: | ,v30^a/
15

```

WebOutput Window 

HTML Source

4  Format: PFT8
⏮ ⏪ ⏩ ⏭

MFN: 004
Title: An Electric hygrometer apparatus for measuring water-vapour loss from plants in the field
MFN: 004
Title: AN ELECTRIC HYGROMETER APPARATUS FOR MEASURING WATER-VAPOUR LOSS FROM PLANTS IN THE FIELD.
MFN: 004
Title: AN ELECTRIC HYGROMETER APPARATUS FOR MEASURING WATER-VAPOUR LOSS FROM PLANTS IN THE FIELD.
Grieve, B.J. Went, F.W.
Grieve, B.J.; Went, F.W.;
Grieve, B.J.; Went, F.W.
; Grieve, B.J. ; Went, F.W.
Grieve, B.J. ; Went, F.W.
Authors
Grieve, B.J.; Went, F.W.
(by: Grieve, B.J.; Went, F.W.)
Paris, Unesco, 1965.
Paris, Unesco, 1965.
Paris Unesco, 1965, p. 247-257


The XHTML/CSS/JavaScript Display environment

J-ISIS uses an embedded browser for displaying format output and thus offers all XHTML/CSS/JavaScript facilities.


And most of these Windows command can be replaced by XHTML, with CSS and JavaScript.


The use of XHTML, with CSS and JavaScript commands will help you in designing formats which will greatly improve your output.

They offer a rich array of text-writing capabilities. For example CSS lets you choose the font1 to be used for text output. Some basic CSS can be learned from the W3SCHOOL http://www.w3schools.com/html/html_css.asp

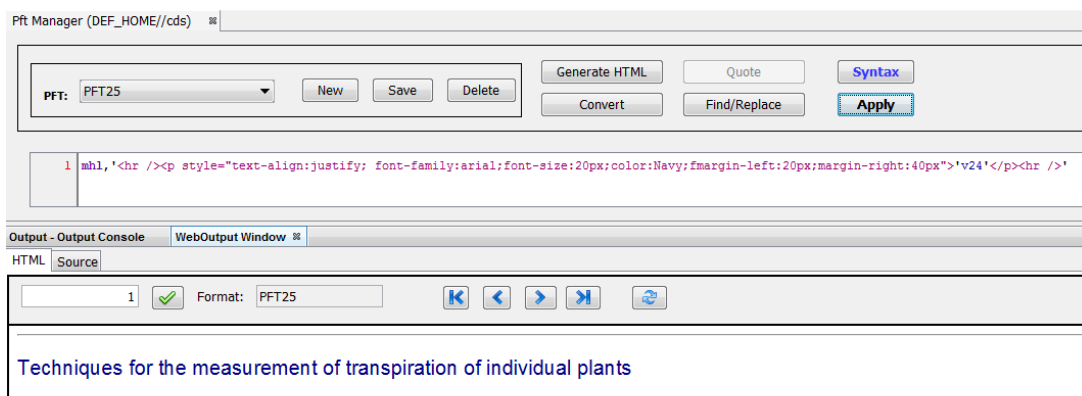

JavaScript Examples:

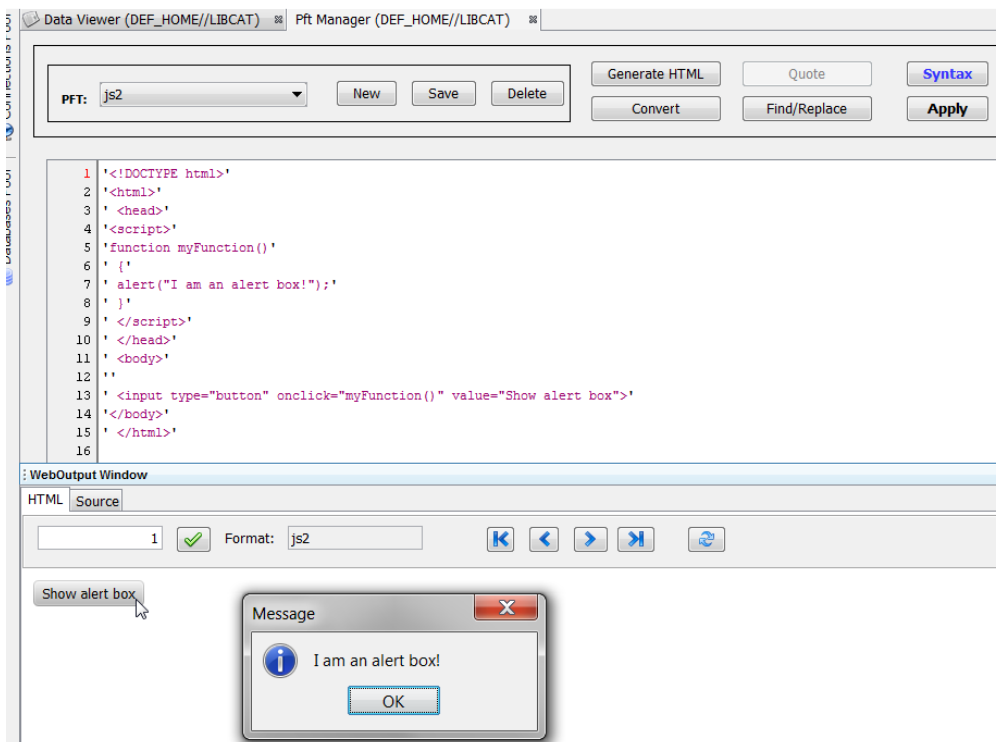

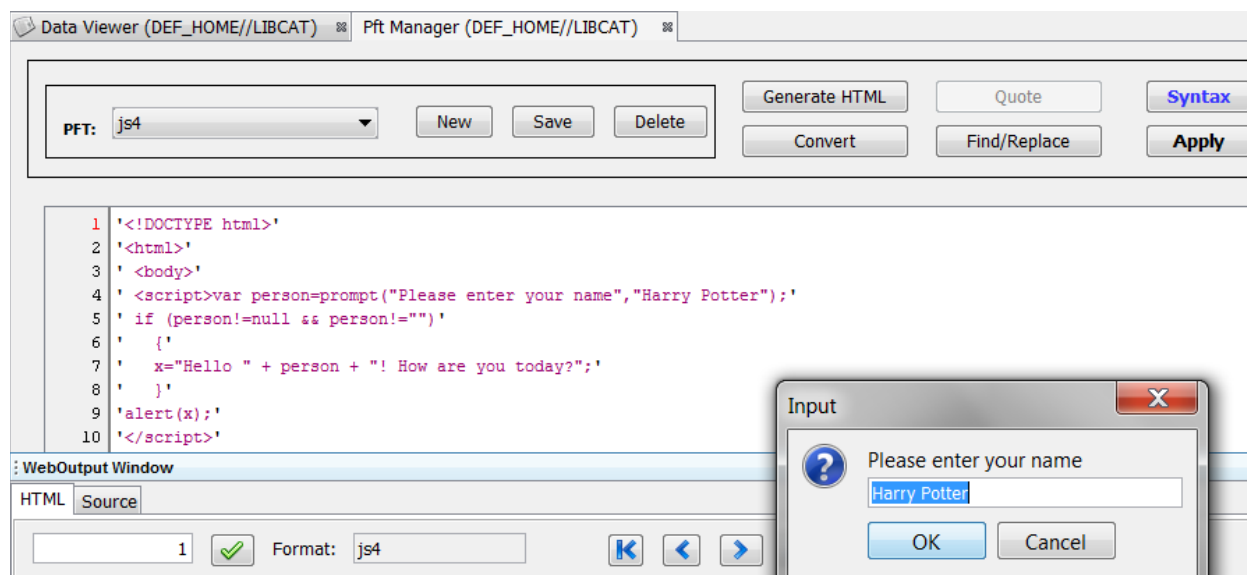

Using an external JavaScript file

This example uses the code presented in the article "Creating a Code 39 Barcode using HTML, CSS and JavaScript" on the CodeProject web site.

<http://www.codeproject.com/Articles/146336/Creating-a-Code-39-Barcode-using-HTML-CSS-and-Java>

Adding Hypertext links to formats: the LINK command

Example:

Syntax: *link((,Click to open"),'OPENFILE file://c:/mypage.doc')*

Note: J-ISIS uses uniform resource locators, abbreviated URL to address documents.

Documents may be located anywhere on the Web, in remote or local J-ISIS databases folders, or on your computer file system.

Blanks inside web URL path must be replaced by "%20".

The path separators should be slashes and not backslashes.

The "file://" URL protocol should be used to address local computer host specific file names and disk letters should be "C|" instead of "C:" , and blanks should be kept.

Examples:

link(('PDF From local FileSystem'),'OPENFILE [file://C|/jisis-workspace/home_test_db/LIBCAT/idoocs/ifla bibliographic record.pdf](file://C:/jisis-workspace/home_test_db/LIBCAT/idoocs/ifla_bibliographic_record.pdf))

If an application on your computer is associated with a DOC documents (for instance MS-Word), the command will open it to show the file mypage.doc

You can also open a web address:

link(('UNESCO'), 'OPENFILE <http://www.unesco.org>')#

or open your favourite mail software to write an e.mail:

link(('Write'), 'OPENFILE <mailto:j.smith@provider.net>')#

or open any document on a shared network directory:

link(('Documentation'), 'OPENFILE <file://computer-1/Public/file1.pdf>')#

or open doc file located on remote computer (IP address) or localhost:


link(('Word DOC From Server'), 'OPENFILE <http://localhost:8585/LIBCAT/idos/J-ISIS%20Presentation%20New.doc>')#

Examples of Display Format and PFT

1. Display_Full format

Create a new display format using PFT manger.

Open Display_Full.txt file and copy the content and paste into newly created format.

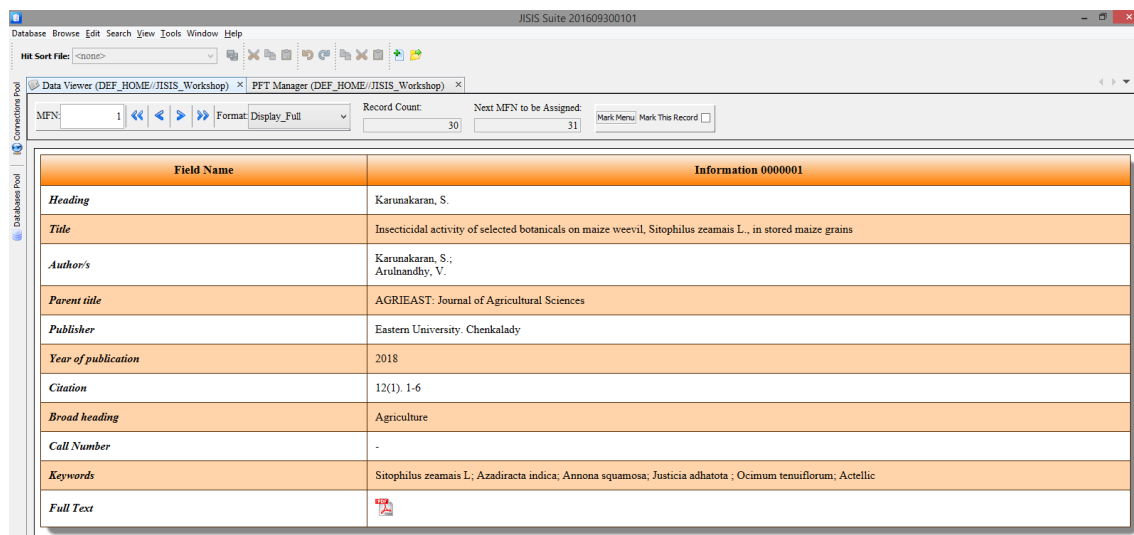


The screenshot shows the JISIS Suite 201609300101 interface. The main window displays a record in the 'Display_Full' format. The record is titled 'Information 0000001' and contains the following fields:

Field Name	Information 0000001
Heading	Karunakaran, S.
Title	Insecticidal activity of selected botanicals on maize weevil, <i>Sitophilus zeamais</i> L., in stored maize grains
Author's	Karunakaran, S.; Arulnandhy, V.
Parent title	AGRJEAST: Journal of Agricultural Sciences
Publisher	Eastern University, Chenkalady
Year of publication	2018
Citation	12(1). 1-6
Broad heading	Agriculture
Call Number	-
Keywords	<i>Sitophilus zeamais</i> L.; <i>Azadiracta indica</i> ; <i>Annona squamosa</i> ; <i>Justicia adhatota</i> ; <i>Ocimum tenuiflorum</i> ; <i>Actellic</i>
Full Text	

2. Display_Short format

Create a new display format using PFT manger.

Open Display_Short.txt file and copy the content and paste into newly created format.

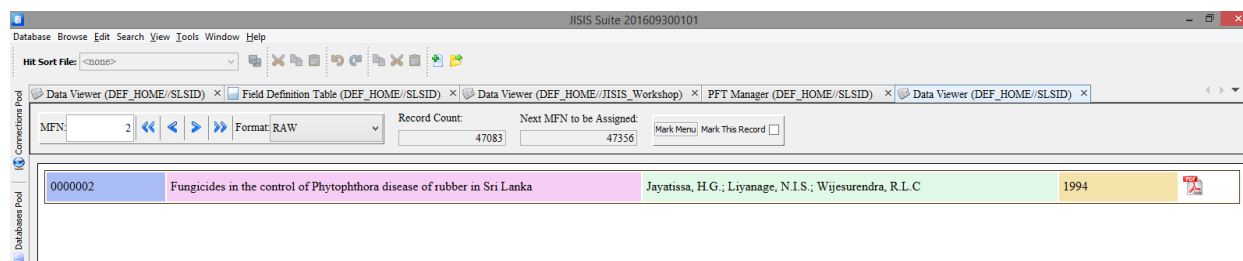

4. Data migration from WINISIS/ Java ISIS to other Software

Data migration from WINISIS/Java ISIS to other software systems is a process often required when organizations want to move to more modern and flexible database management systems.

Ex: MySQL, PostgreSQL, Koha, Greenstone, DSpace, or any other modern database or library/information management system.

You need to map the data fields from ISIS format to the schema used by the target software.

- In **Koha**, for example, this would involve mapping to MARC21 or Dublin Core
- For **MySQL/PostgreSQL**, define appropriate table structures
- For **DSpace**, map to Dublin Core

Import to Target System



- For **MARC-based systems** (Koha, etc.):
 - Use MARC import tools (e.g., bulkmarcimport in Koha)
- For **Relational databases**:
 - Use CSV/SQL scripts to import via LOAD DATA (MySQL) or COPY (PostgreSQL)
- For **DSpace**:
 - Use Simple Archive Format (SAF) with metadata in XML
- For **Greenstone**:
 - Use import.pl script after converting to XML/Greenstone format

Example: Export from WinISIS/JISIS to CSV

1. Create a PFT (Print Format Table) to format output as CSV:
2. V1,|V2,|V3,|V4/
3. Use "Print to File" and select your PFT
4. Save as .txt and convert to .csv in Excel

Then use Python or Excel to clean and prepare the data for import into the new system.

5. Export .iso Data and convert into .mrc format

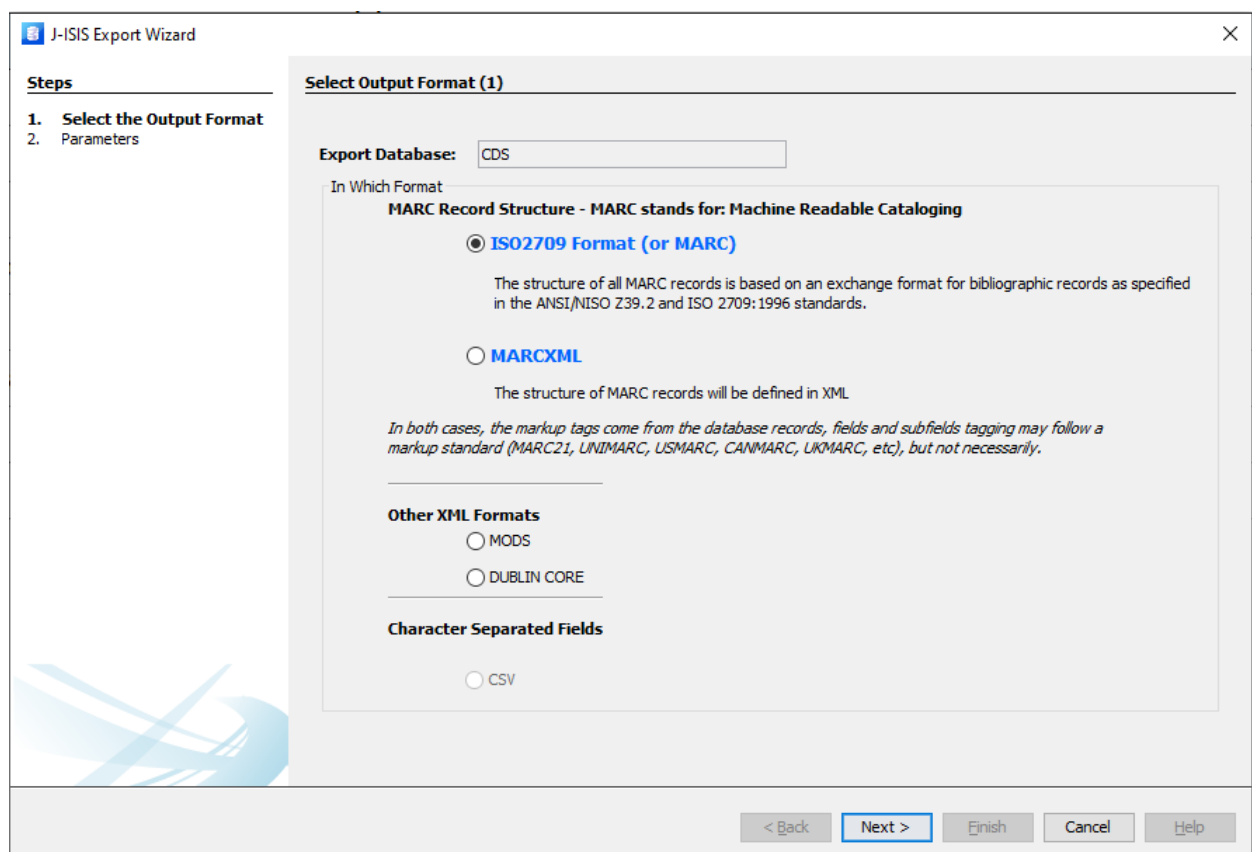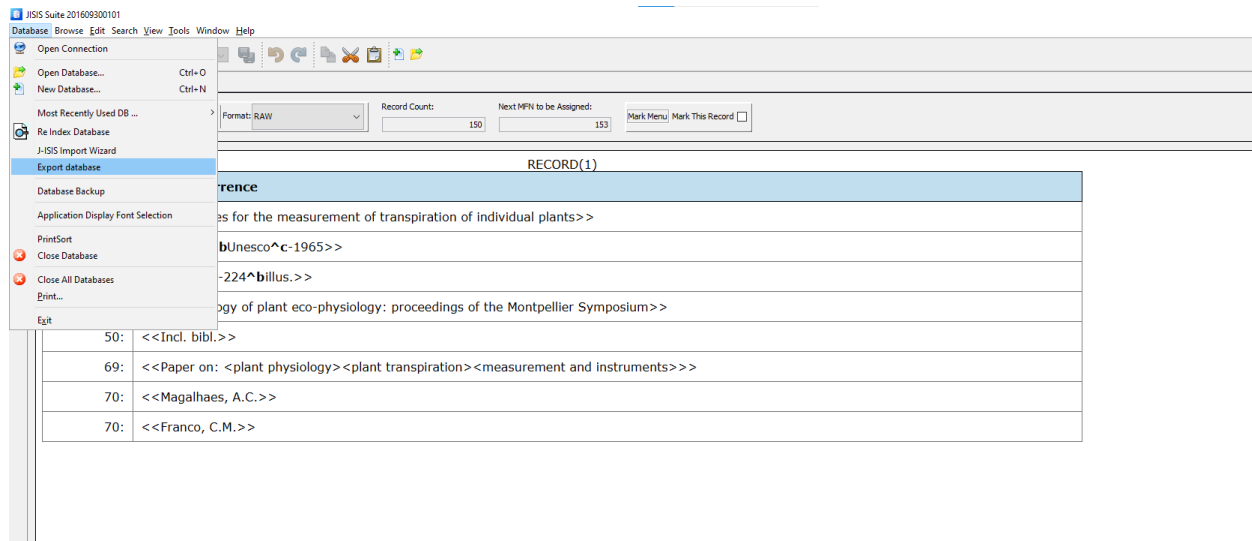

J-ISIS Export Wizard

Steps

1. Select the Output Format
2. **Parameters**

ISO2709 Export - Output Parameters. (1.1)

Output ISO File

Name of Output ISO File: CDS11

Output Directory: C:\jisis_suite.5.February.2020\jisis_suite\work Select

Export:

☒ **MFN Range** ☒ All ☐ MFNs

Enter MFNs and/or MFN ranges separated by commas. For example 1,10,100-150,50

No Marked Sets

☐ Search Results From Query: No Search

☐ Use this Hit Sort File for driving the output: C:\jisis_suite.5.February.2020\jisis_suite\work\CDS.hitsort

Options

(Use zero for no limit)

Output Line Length: 80

Reformatting FST: <none>

Renumber Records From MFN:

Output Tag Containing MFN:

Encoding: UTF-8

Separators

1E **Field Terminator**


1d **Record Terminator**


031 1F US (Unit Sepa... **Subfield Delimiter**



Reset Defaults

< Back Next > **Finish** Cancel Help

Click MARC Tools

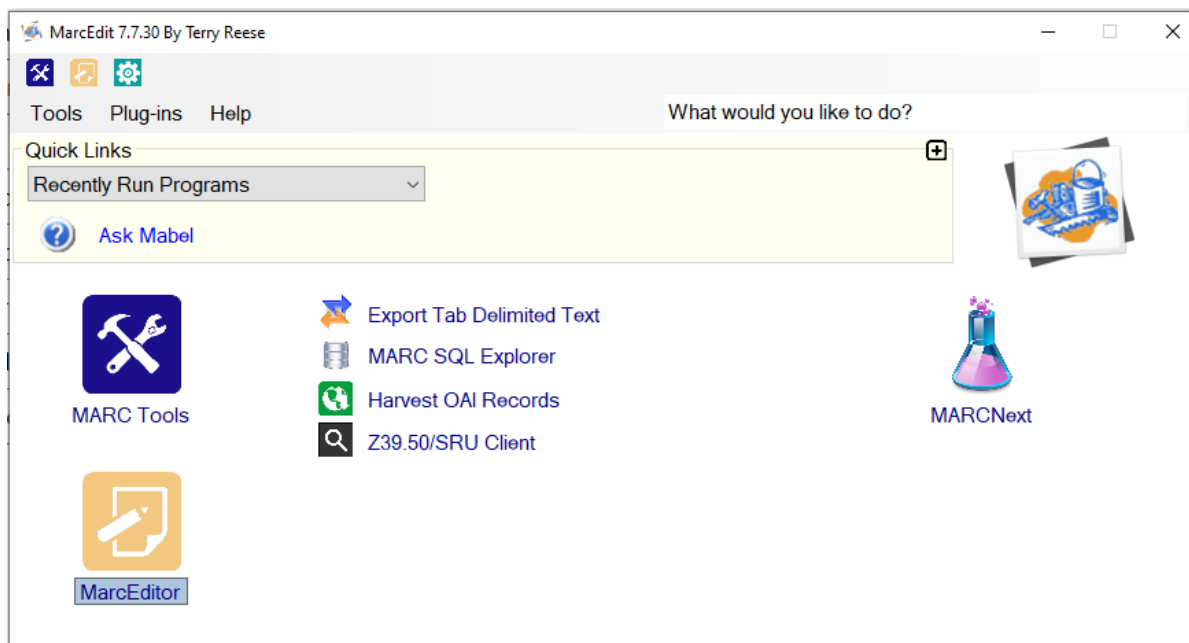

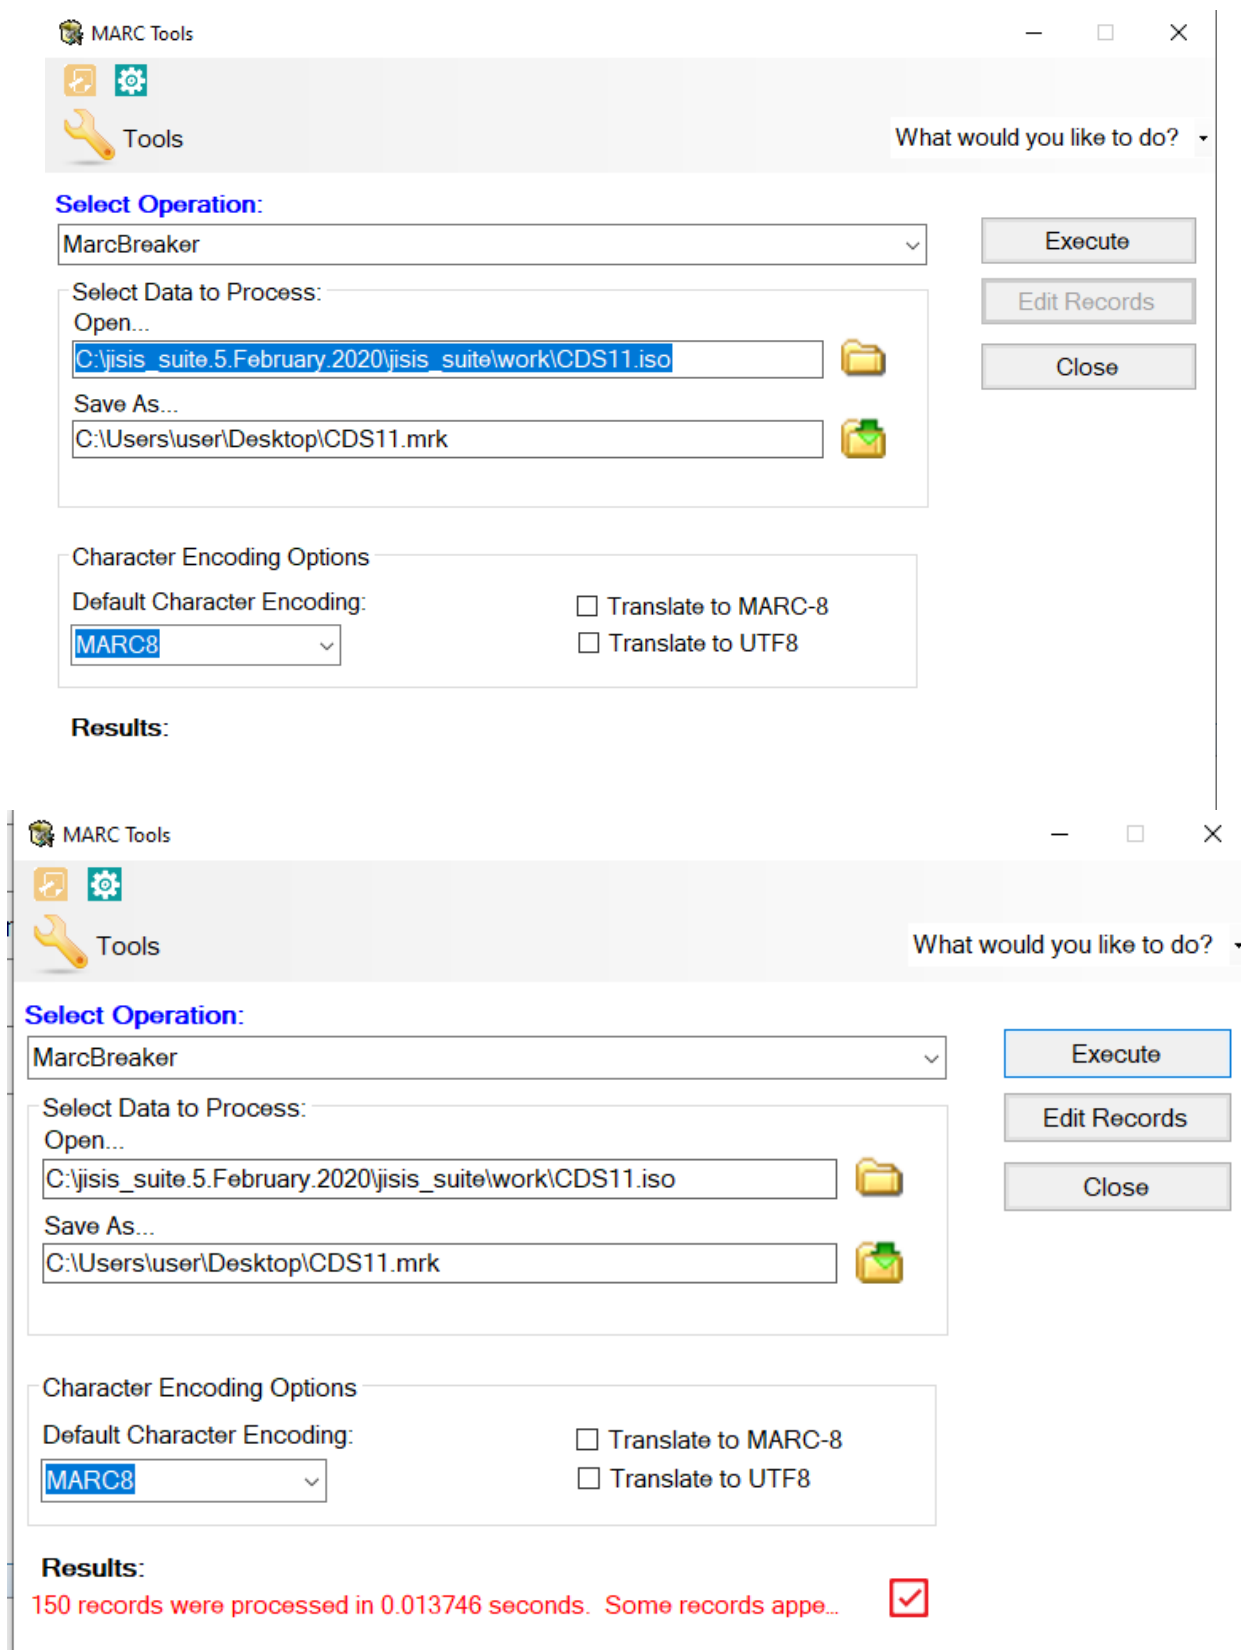

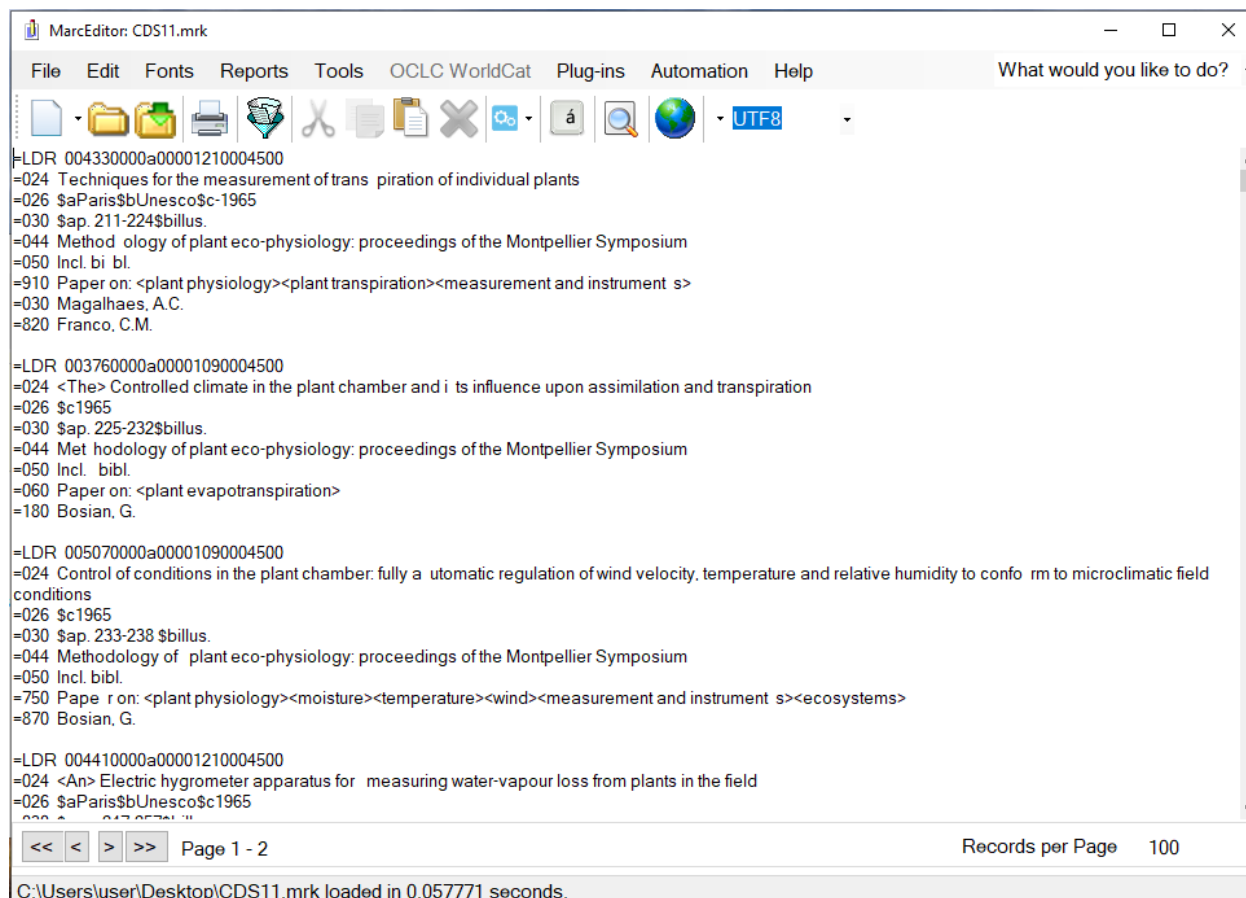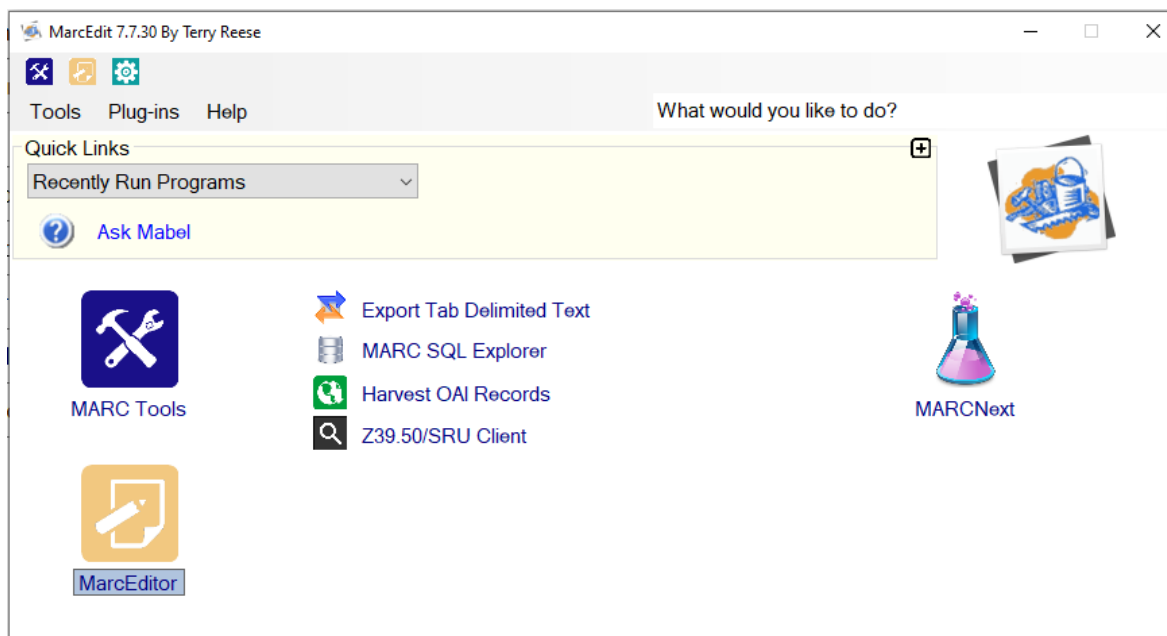

MarcEditor: eug5vuvo.hvxmarcc91740c9a3bf4b69b88974f681c6b8a4_2025-10-13_03-23-56-PM.tmp.mrk

File Edit Fonts Reports Tools OCLC WorldCat Plug-ins Automation Help What would you like to do?

=LDR 004410000a00001210004500
 =024 Techniques for the measurement of transpiration of individual plants
 =026 \$aParis\$bUnesco\$c-1965
 =030 \$ap. 211-224\$billus.
 =044 Methodology of plant eco-physiology: proceedings of the Montpellier Symposium
 =050 Incl. bibl.
 =910 Paper on: <plant physiology><plant transpiration><measurement and instruments>
 =030 Magalhaes, A.C.
 =820 Franco, C.M.

=LDR 003820000a00001090004500
 =024 <The> Controlled climate in the plant chamber and its influence upon assimilation and transpiration
 =026 \$c1965
 =030 \$ap. 225-232\$billus.
 =044 Methodology of plant eco-physiology: proceedings of the Montpellier Symposium
 =050 Incl. bibl.
 =060 Paper on: <plant evapotranspiration>
 =180 Bosian, G.

=LDR 005170000a00001090004500
 =024 Control of conditions in the plant chamber: fully automatic regulation of wind velocity, temperature and relative humidity to conform to microclimatic field conditions
 =026 \$c1965
 =030 \$ap. 233-238 \$billus.
 =044 Methodology of plant eco-physiology: proceedings of the Montpellier Symposium
 =050 Incl. bibl.
 =750 Paper on: <plant physiology><moisture><temperature><wind><measurement and instruments><ecosystems>
 =870 Bosian, G.

=LDR 004490000a00001210004500
 =024 <An> Electric hygrometer apparatus for measuring water-vapour loss from plants in the field
 =026 \$aParis\$bUnesco\$c1965
 =030 \$ap. 211-224\$billus.

<< < > >> Page 1 - 2 Records per Page 100

MarcEditor: eug5vuvo.hvxmarcc91740c9a3bf4b69b88974f681c6b8a4_2025-10-13_03-23-56-PM.tmp.mrk

File Edit Fonts Reports Tools OCLC WorldCat Plug-ins Automation Help

Return to Main Window

New

Open Ctrl+O

Recent Files

Clear History

Close Ctrl+W

Export for...

Import from...

Save Ctrl+S

Save As...

Print Ctrl+P

Print A Record Per Page

Select Records for Edit

Compile File into MARC Ctrl+Alt+C

Exit Ctrl+Q

044 Methodology of plant eco-physiology: proceedings of the Montpellier Symposium

050 Incl. bibl.

750 Paper on: <plant physiology><moisture><temperature><wind><measurement and instrument s><ecosystems>

870 Bosian, G.



=LDR 004490000a00001210004500

=024 <An> Electric hygrometer apparatus for measuring water-vapour loss from plants in the field

=026 \$aParis\$bUnesco\$c1965

<< < > >> Page 1 - 2 Recc

6. Export MARC21XML Data and convert into .mrc format

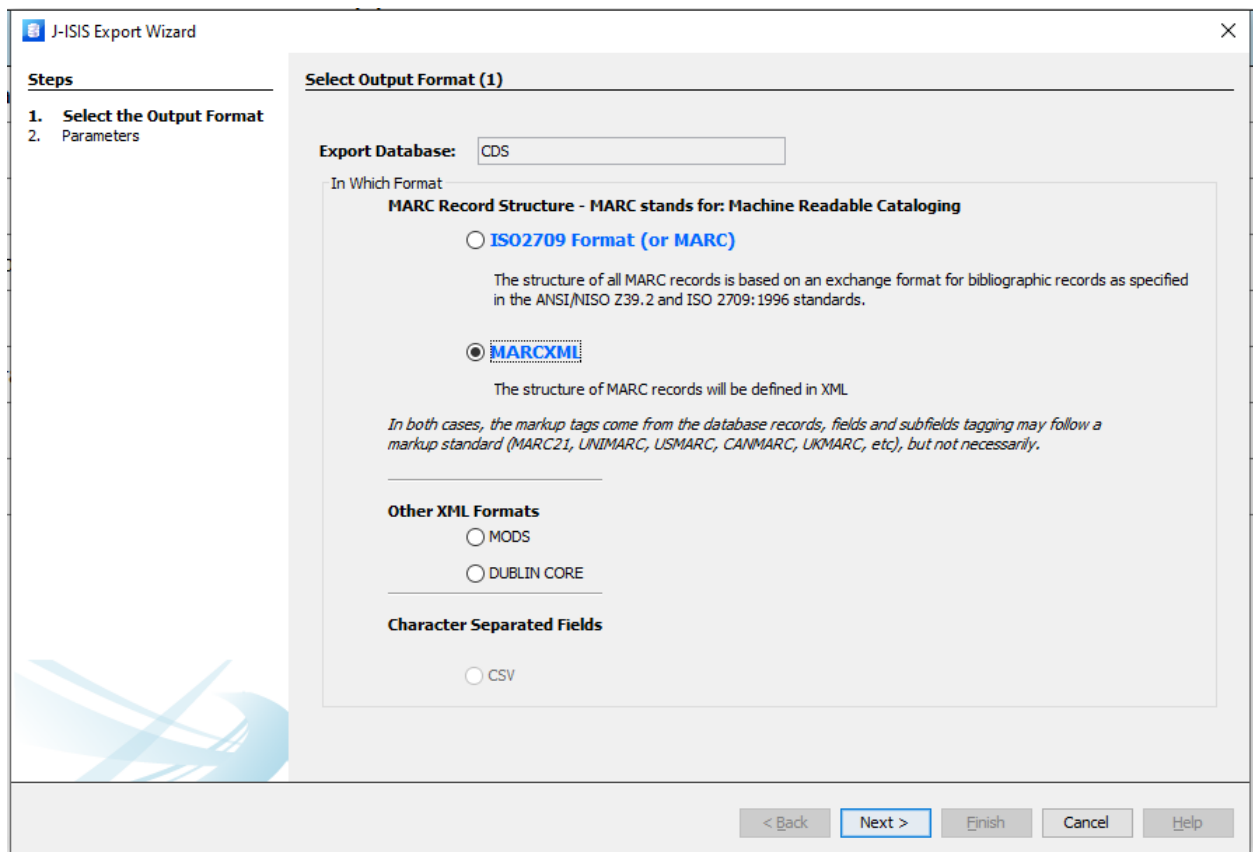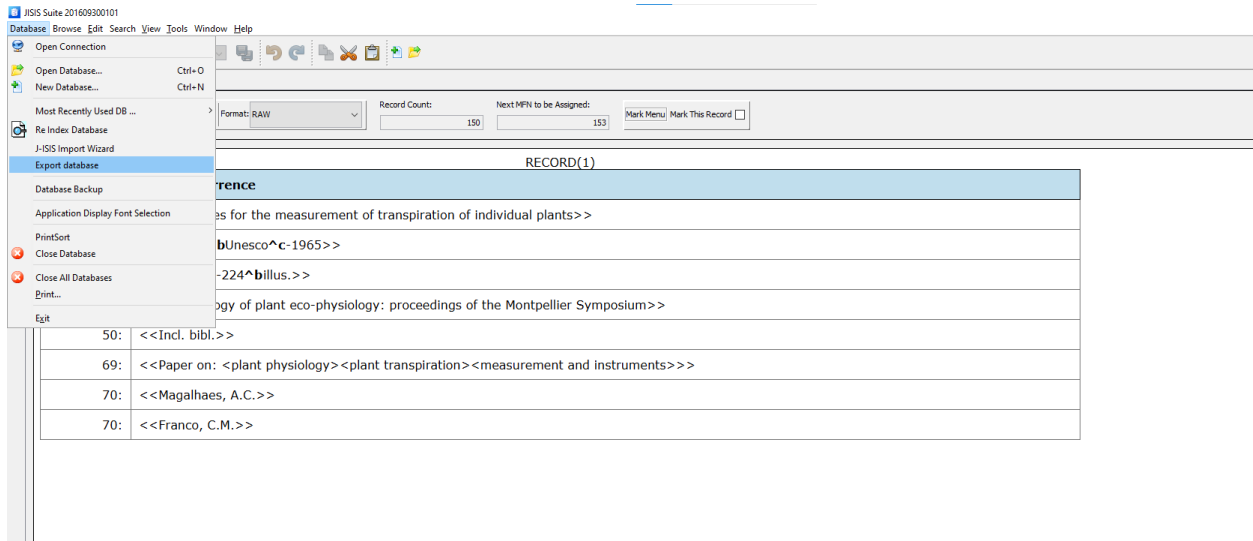

J-ISIS Export Wizard

Steps

1. Select the Output Format
2. **Parameters**

MARCXML Export - Output Parameters. (1.2)

Name of MarcXML file:

Output Directory:

RECORD SELECTION

Enter MFNs and/or MFN ranges separated by commas. For example 1,10,100-150,50

☒ **MFN Range**
☒ **All**
☐ **MFNs**

☐ **Marked**

☐ **Search Results**
 From Query:


☐ **Use this Hit Sort File for driving the output:**


Reformatting FST:
Encoding:

Renumber Records From MFN:


Output Tag Containing MFN:



Click MARC Tools

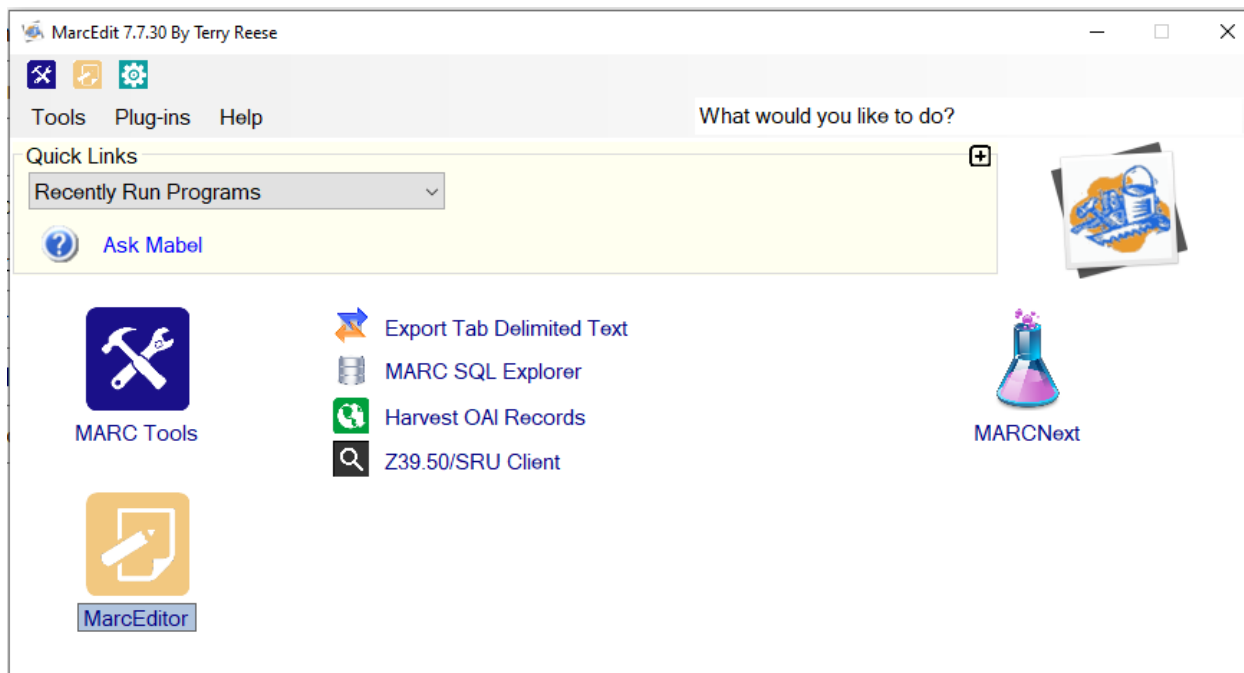

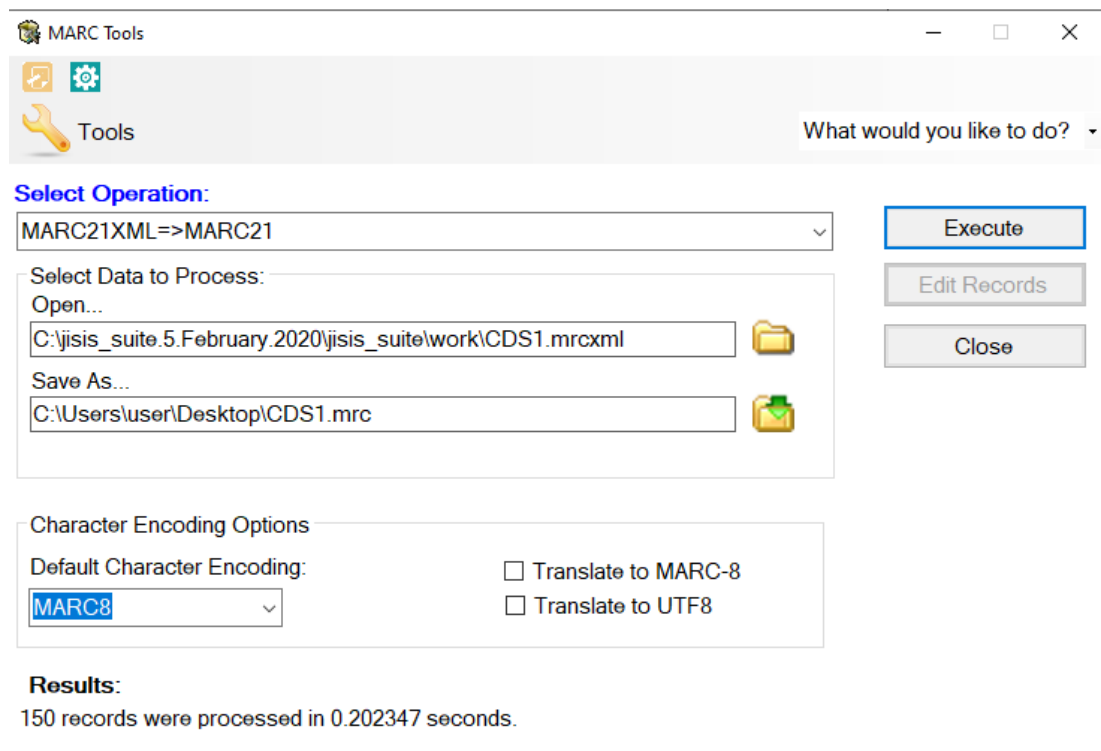

Click MarcEditor

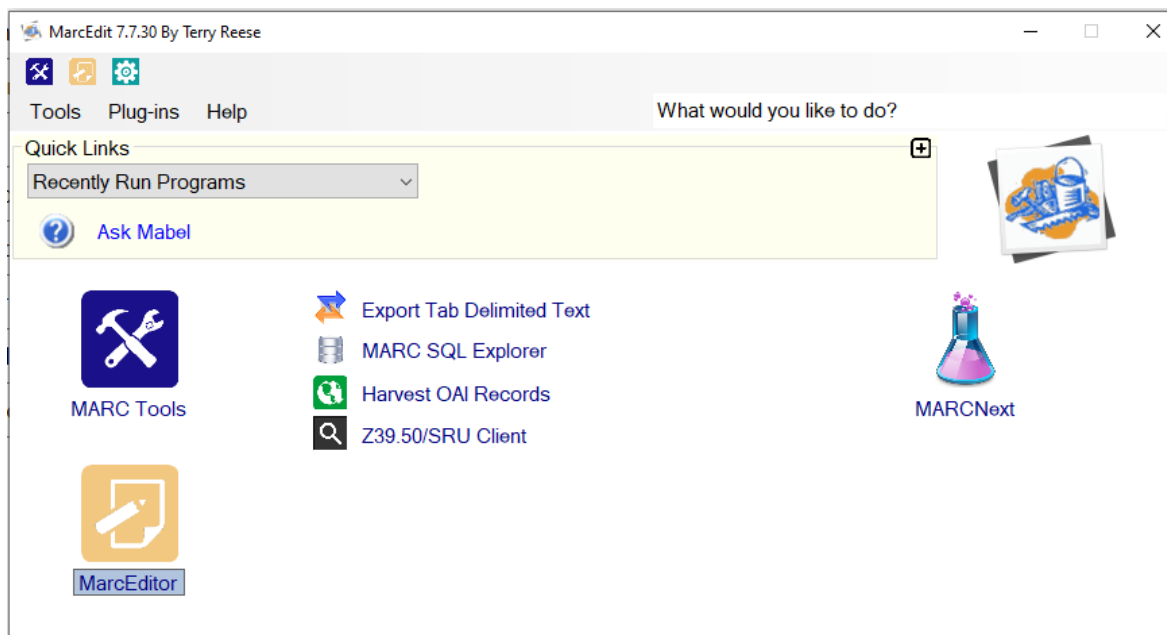

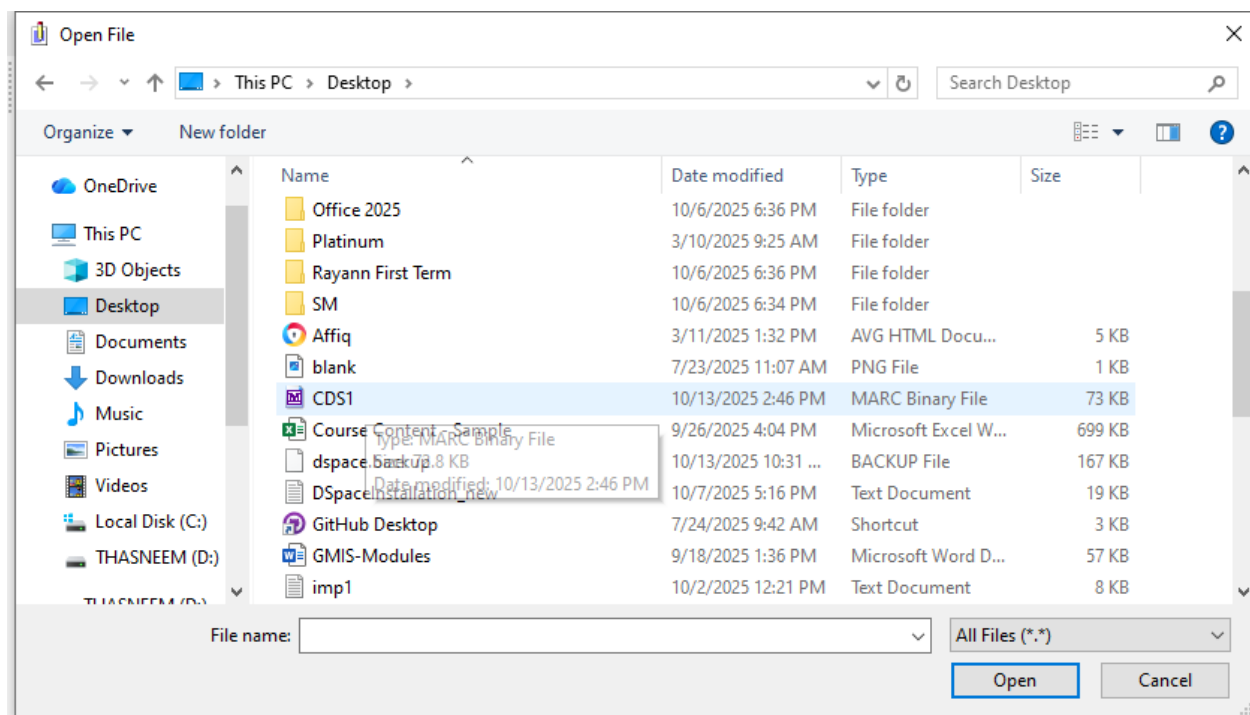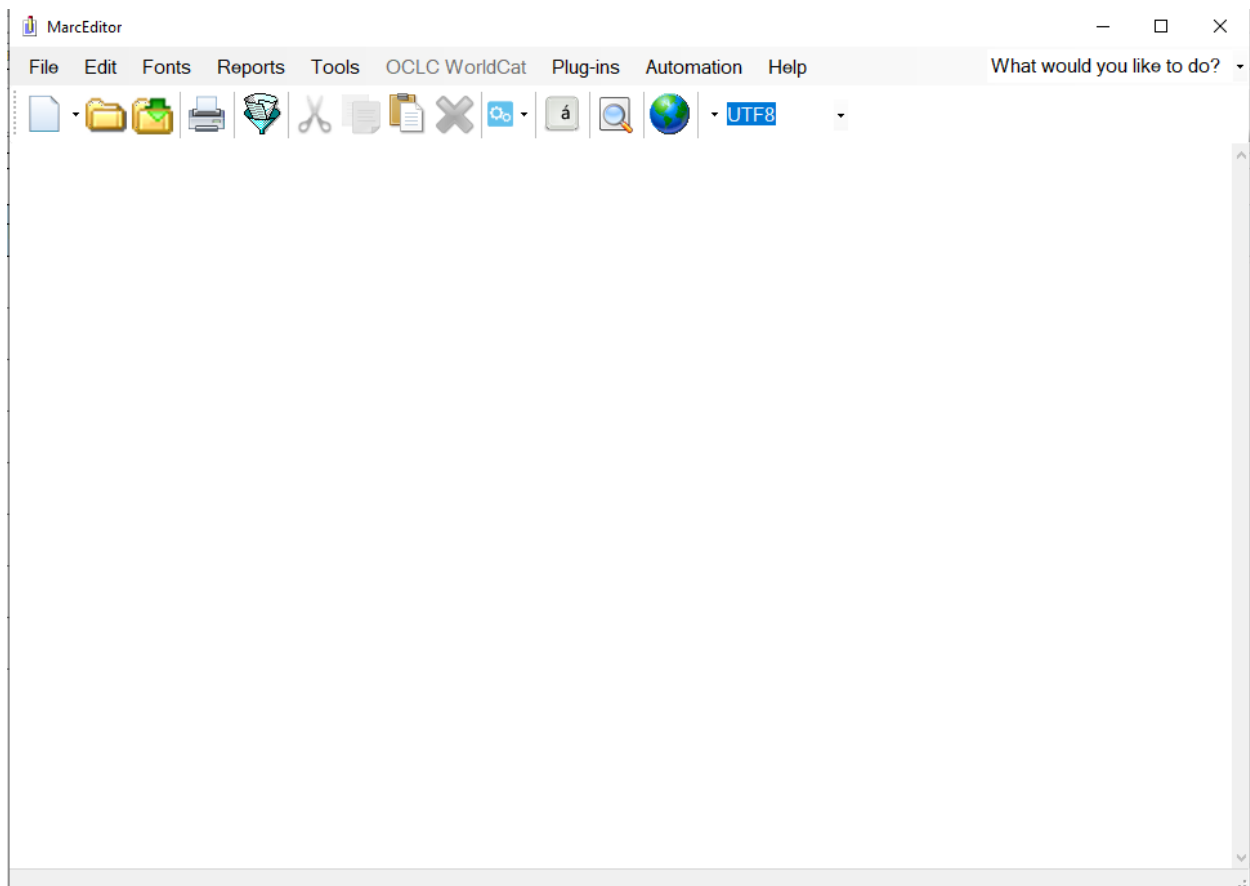

MarcEditor: 3sowlorr.ufomarc074a743a659a482aa6e3fc4465503780_2025-10-13_02-57-03-PM.tmp.mrk

File Edit Fonts Reports Tools OCLC WorldCat Plug-ins Automation Help What would you like to do?

UTF8

=LDR 004610a00a00001210004500
 =024 \\\\$*Techniques for the measurement of transpiration of individual plants
 =026 \\\\$aParis\$bUnesco\$c-1965
 =030 \\\\$ap. 211-224\$billus.
 =044 \\\\$*Methodology of plant eco-physiology: proceedings of the Montpellier Symposium
 =050 \\\\$*Incl. bibl.
 =069 \\\\$*Paper on: <plant physiology><plant transpiration><measurement and instruments>
 =070 \\\\$*Magalhaes, A.C.
 =070 \\\\$*Franco, C.M.

=LDR 004000a00a00001090004500
 =024 \\\\$*The> Controlled climate in the plant chamber and its influence upon assimilation and transpiration
 =026 \\\\$c1965
 =030 \\\\$ap. 225-232\$billus.
 =044 \\\\$*Methodology of plant eco-physiology: proceedings of the Montpellier Symposium
 =050 \\\\$*Incl. bibl.
 =069 \\\\$*Paper on: <plant evapotranspiration>
 =070 \\\\$*Bosian, G.

=LDR 005310a00a00001090004500
 =024 \\\\$*Control of conditions in the plant chamber; fully automatic regulation of wind velocity, temperature and relative humidity to conform to microclimatic field conditions
 =026 \\\\$c1965
 =030 \\\\$ap. 233-238\$billus.
 =044 \\\\$*Methodology of plant eco-physiology: proceedings of the Montpellier Symposium
 =050 \\\\$*Incl. bibl.
 =069 \\\\$*Paper on: <plant physiology><moisture><temperature><wind><measurement and instruments><ecosystems>
 =070 \\\\$*Bosian, G.

=LDR 004690a00a00001210004500
 =024 \\\\$*<An> Electric hygrometer apparatus for measuring water-vapour loss from plants in the field
 =026 \\\\$aParis\$bUnesco\$c1965
 =030 \\\\$ap. 211-224\$billus.

<< < > >> Page 1 - 2 Records per Page 100

1.



The screenshot shows the OCLC WorldCat interface with a list of records on the left and a dialog box for exporting tab-delimited records on the right.

Records List:

- «LDR 004410000a00001210004500
- «024 Techniques for the measurement of transpiration
- «026 \$aParis\$ bUnesco\$ c\$-1965
- «030 \$ap. 211-224\$ billus.
- «044 Methodology of plant eco-physiology: proceedings
- «050 Incl. bibl.
- «910 Paper on: <plant physiology><plant transpiration>
- «030 Magalhães, A.C.
- «820 Franco, C.M.
- «LDR 003820000a00001090004500
- «024 <The> Controlled climate in the plant chamber and
- «026 \$c1965
- «030 \$ap. 225-232\$ billus.
- «044 Methodology of plant eco-physiology: proceedings
- «050 Incl. bibl.
- «060 Paper on: <plant evapotranspiration>
- «180 Bosian, G.
- «LDR 005170000a00001090004500
- «024 Control of conditions in the plant chamber: fully a
- «026 \$c1965
- «030 \$ap. 233-238\$ billus.
- «044 Methodology of plant eco-physiology: proceedings
- «050 Incl. bibl.
- «750 Paper on: <plant physiology><moisture><tempera
- «870 Bosian, G.
- «LDR 004490000a00001210004500
- «024 <An> Electric hygrometer apparatus for measuring
- «026 \$aParis\$ bUnesco\$ c\$1965
- «030 \$ap. 247-257\$ billus.
- «044 Methodology of plant eco-physiology: proceedings
- «050 Incl. bibl.
- «130 Paper on: <hygrometers><plant transpiration><moisture><water balance>

Export Tab Delimited Records Dialog Box:

Settings...

Export Tab Delimited Records

Step 1: Set File Paths

File Path: C:\Users\user\Desktop\DataMigration\cds2.mrc

File Path: C:\Users\user\Desktop\DataMigration\cds3.txt

Select Field Delimiter: Tab (t)


In field delimiter: []

Contextual delimiter: []


Buttons: Next >>, Close

The screenshot shows a web browser window with a list of records on the left and a dialog box titled 'Export Tab Delimited Records' in the foreground. The dialog box has a 'Settings...' button and a section titled 'Step 2: Define Fields/Subfields to Export'. It includes a large empty text area, a checkbox for 'Normalize field data', and two input fields for 'Field:' and 'Subfield:'. The 'Field:' input has a dropdown arrow, and the 'Subfield:' input is empty. There are also links for 'Add Field' and 'Delete Field'. At the bottom of the dialog are buttons for 'Back', 'Export', and 'Close'. The background shows a list of records with fields like 'LDR', '024', '026', '030', '044', '050', '0910', '030', '820', 'LDR', '024', '026', '030', '044', '050', '060', '180', 'LDR', '005170000a00001090004500', '024', '026', '030', '044', '050', '750', '870', 'LDR', '004490000a00001210004500', '024', '026', '030', '044', '050', '130'.


6.

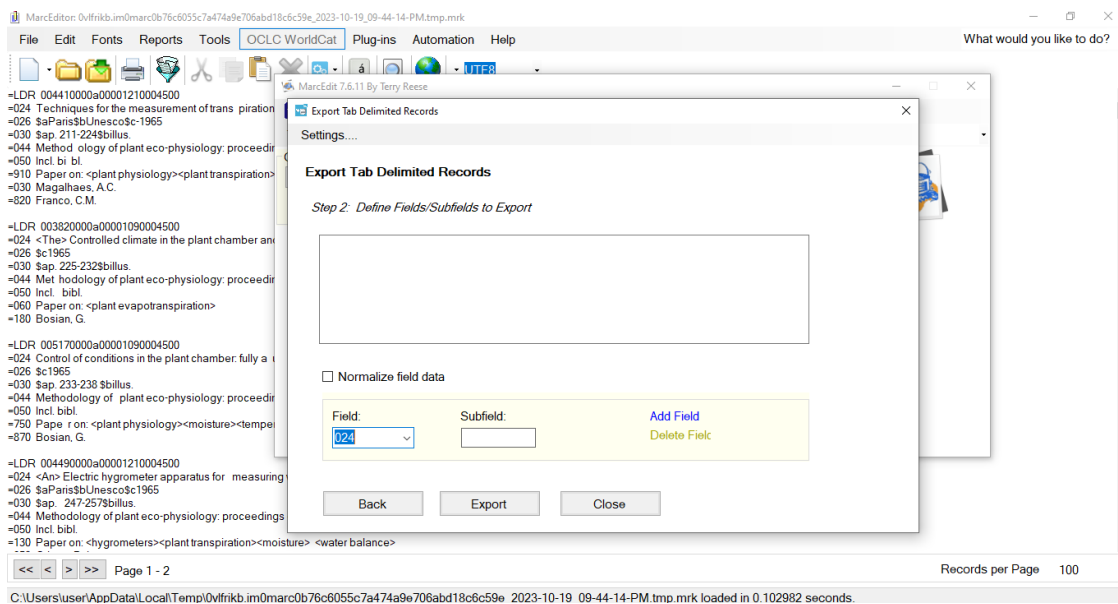


7.

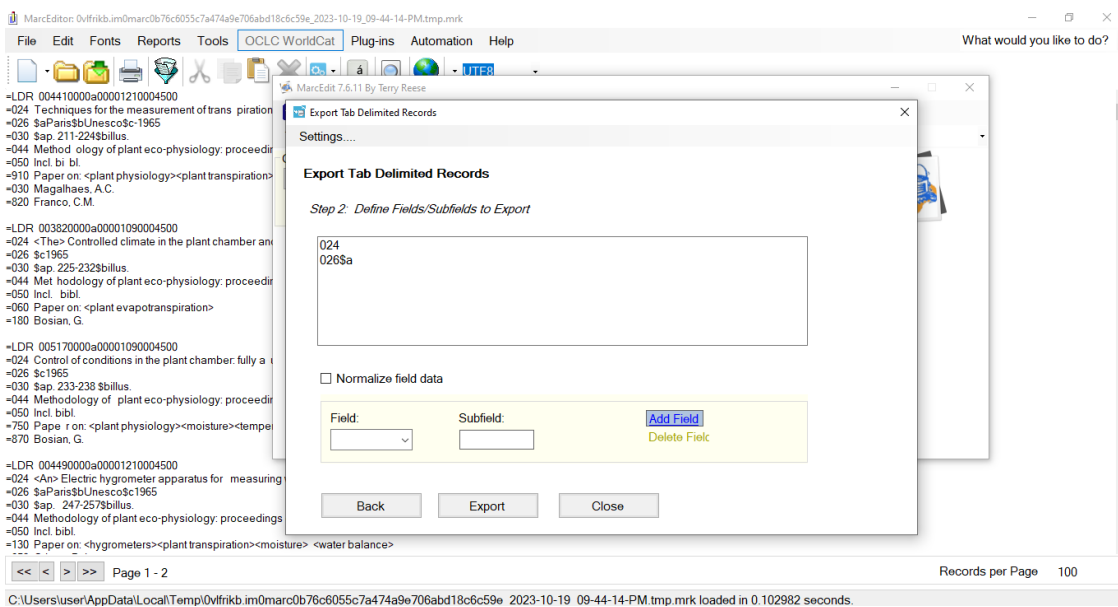


8.

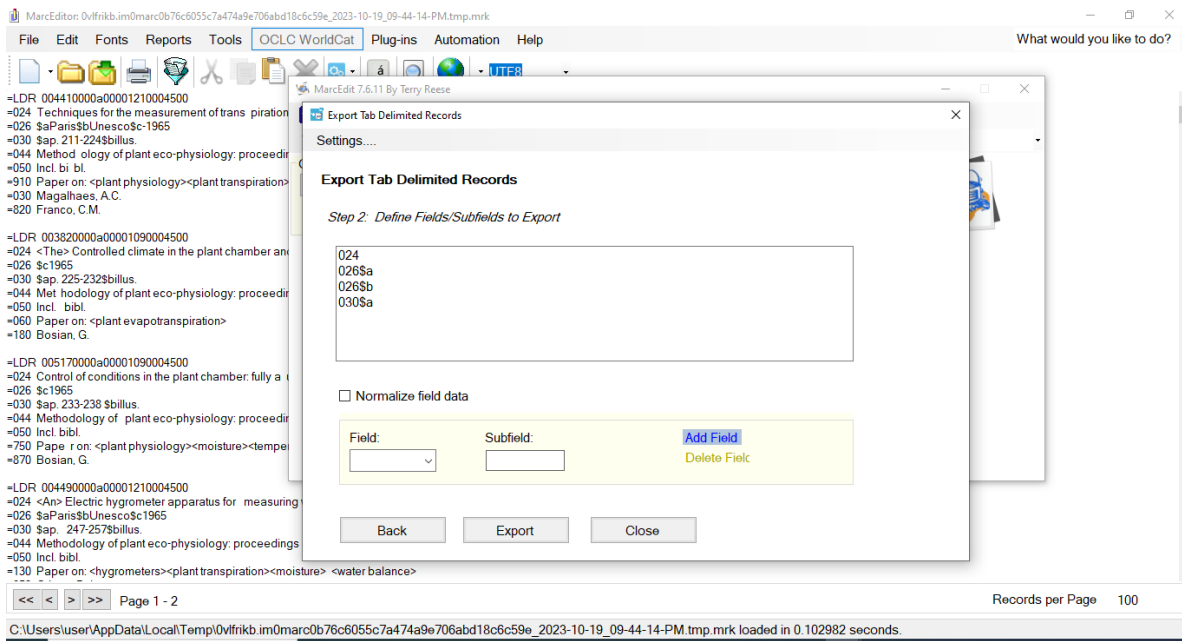


9.

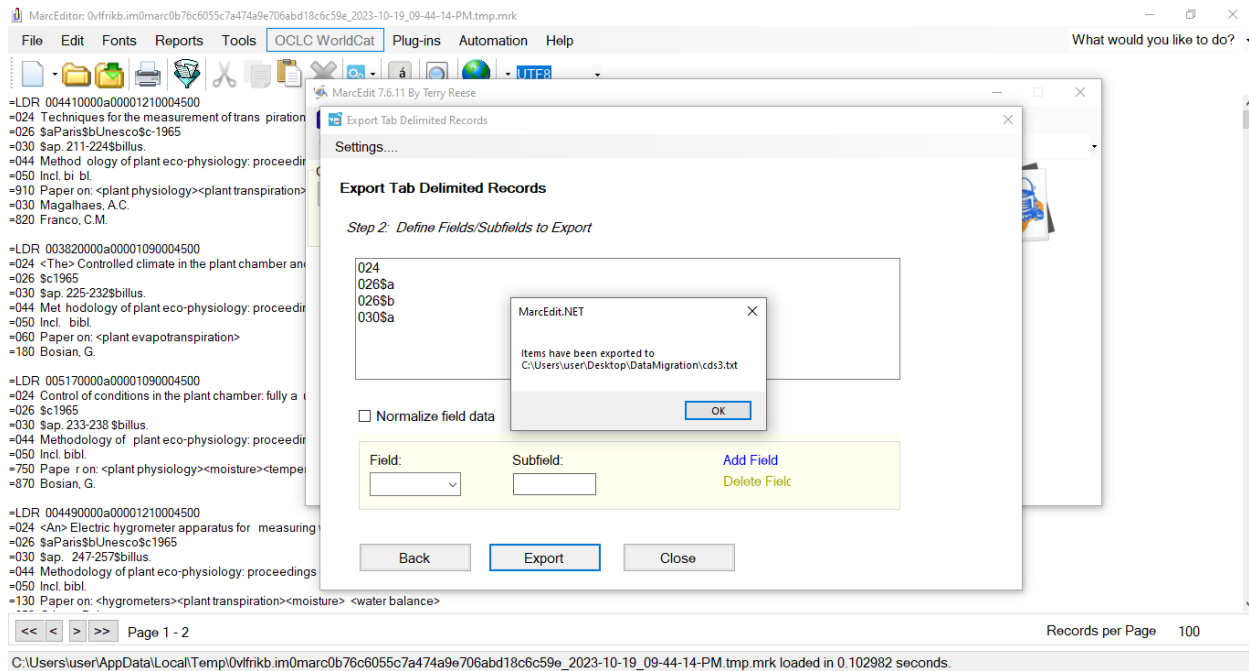


10.

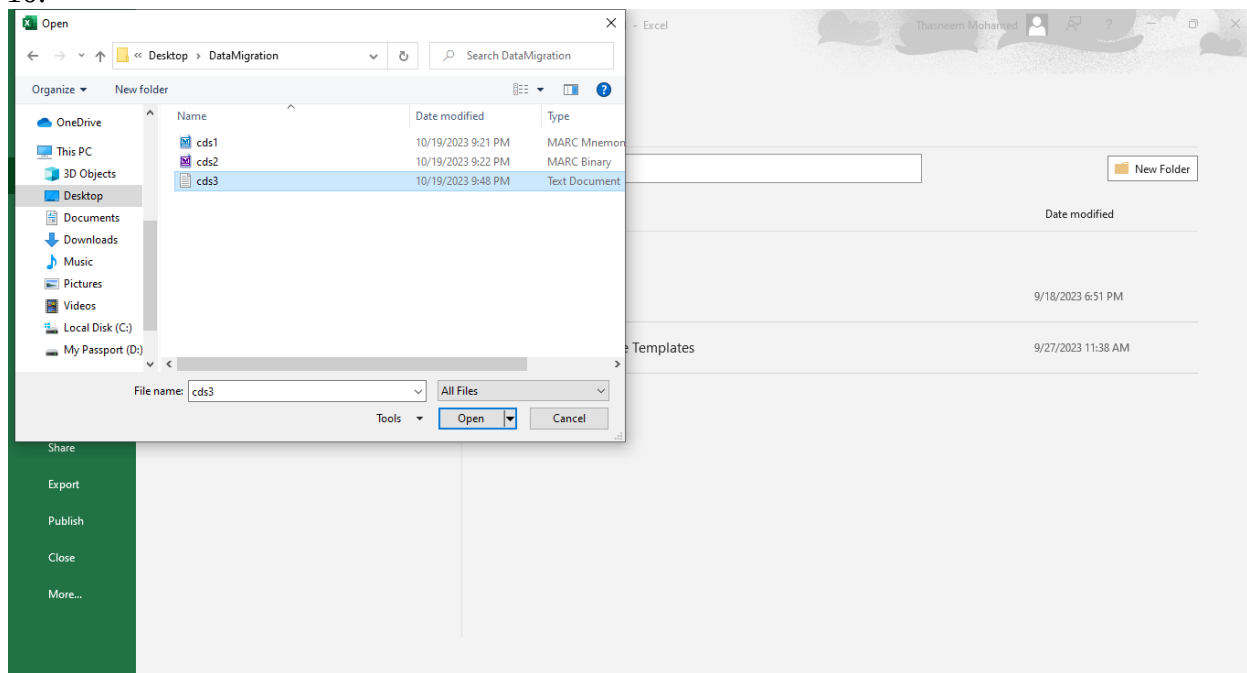


11.

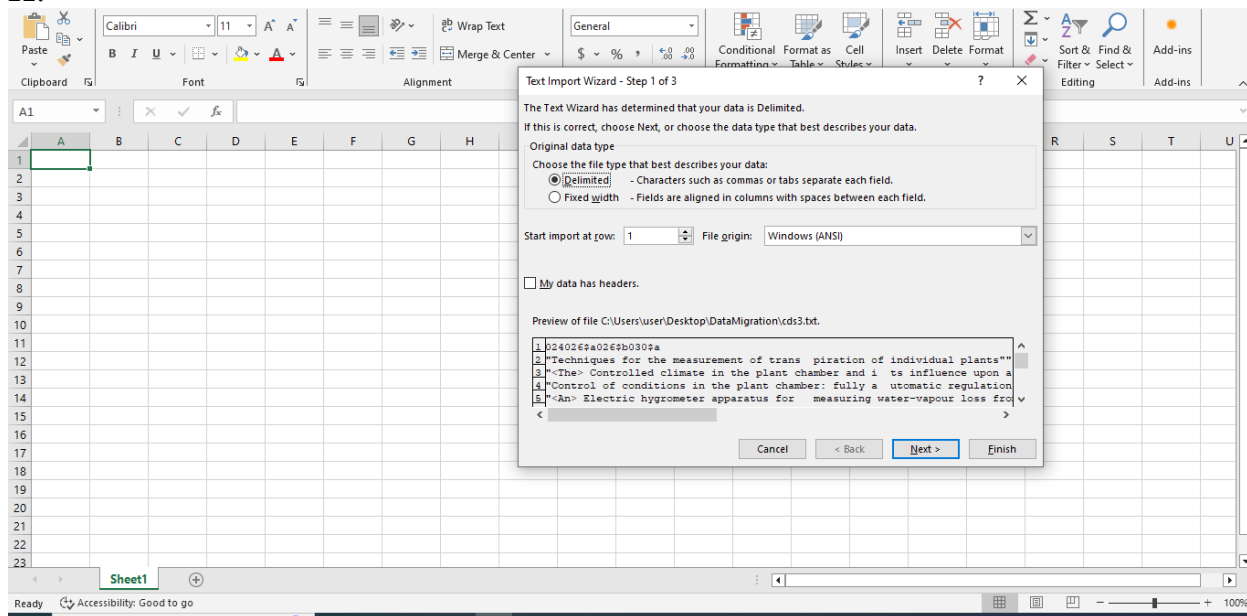


12.

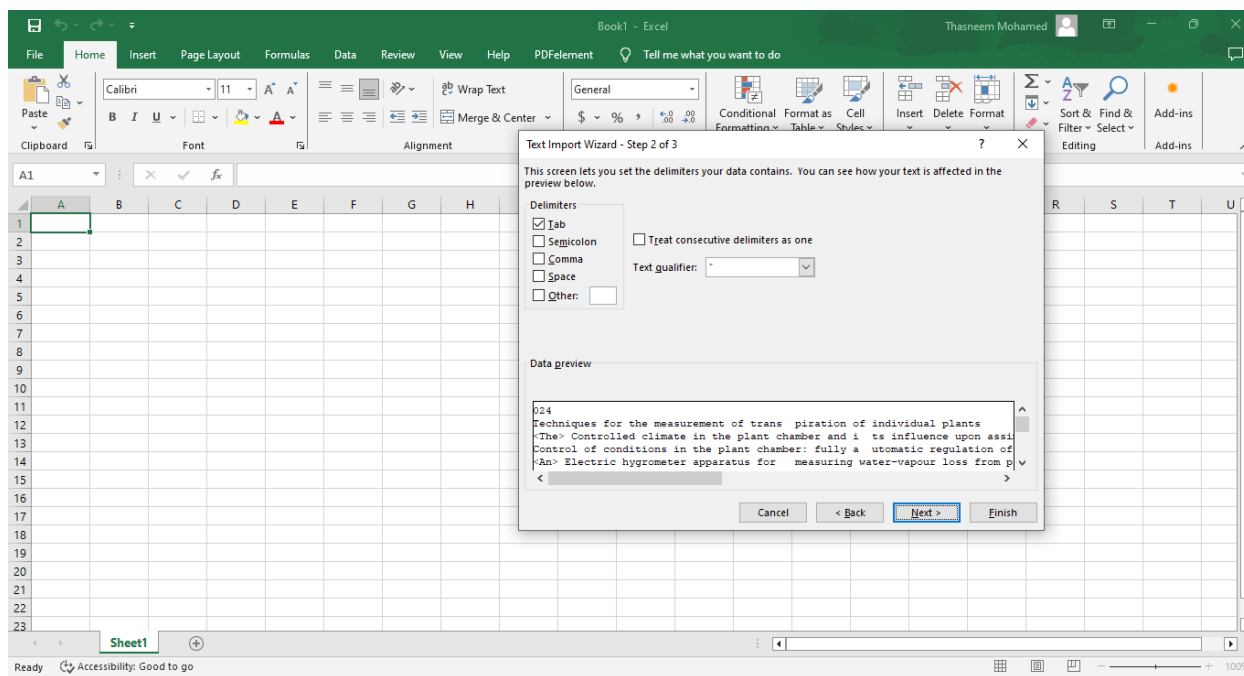


13.

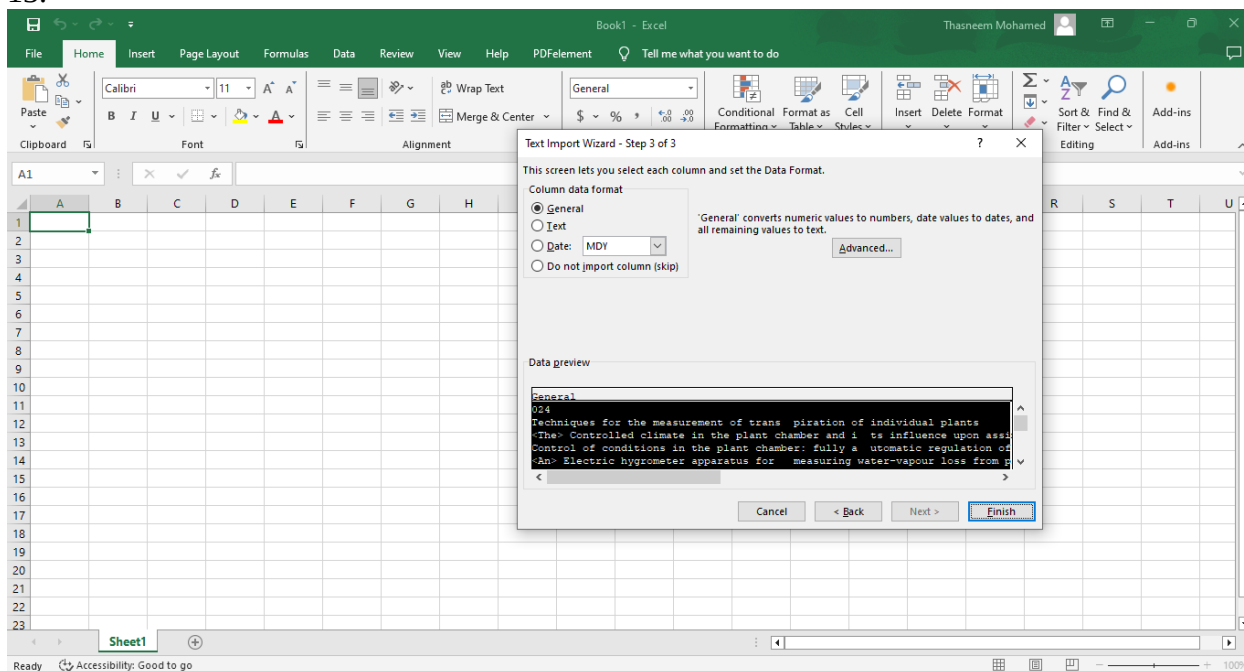

14.

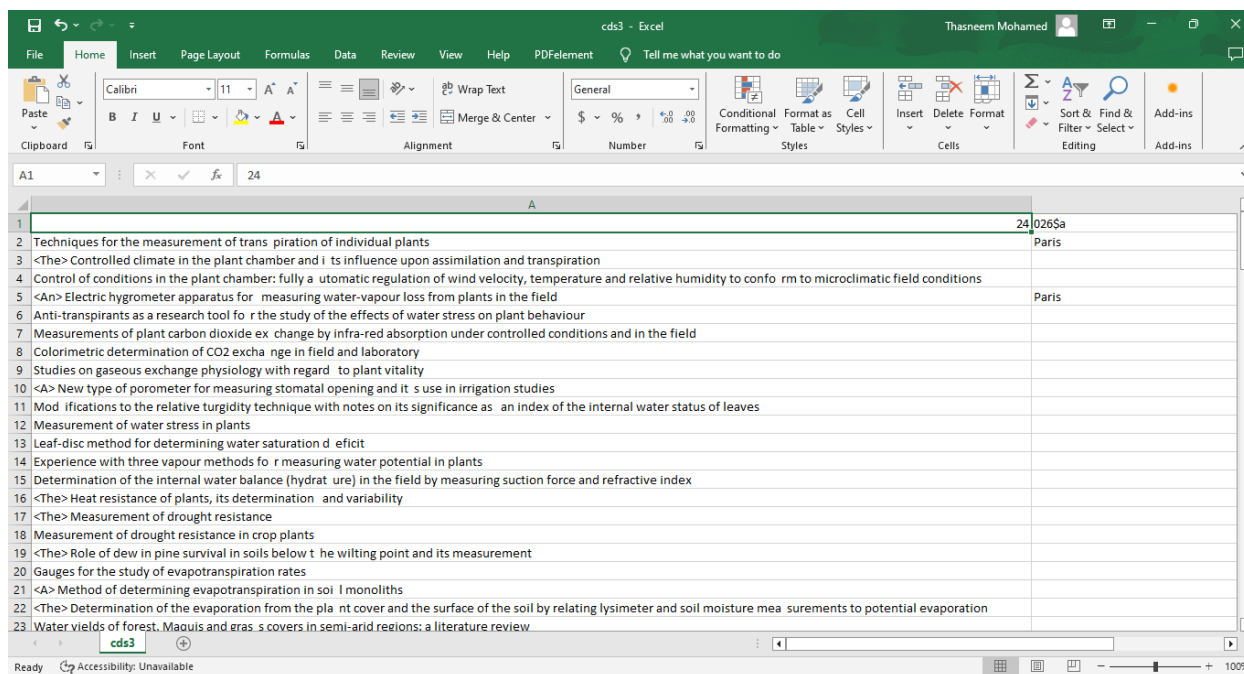


15.

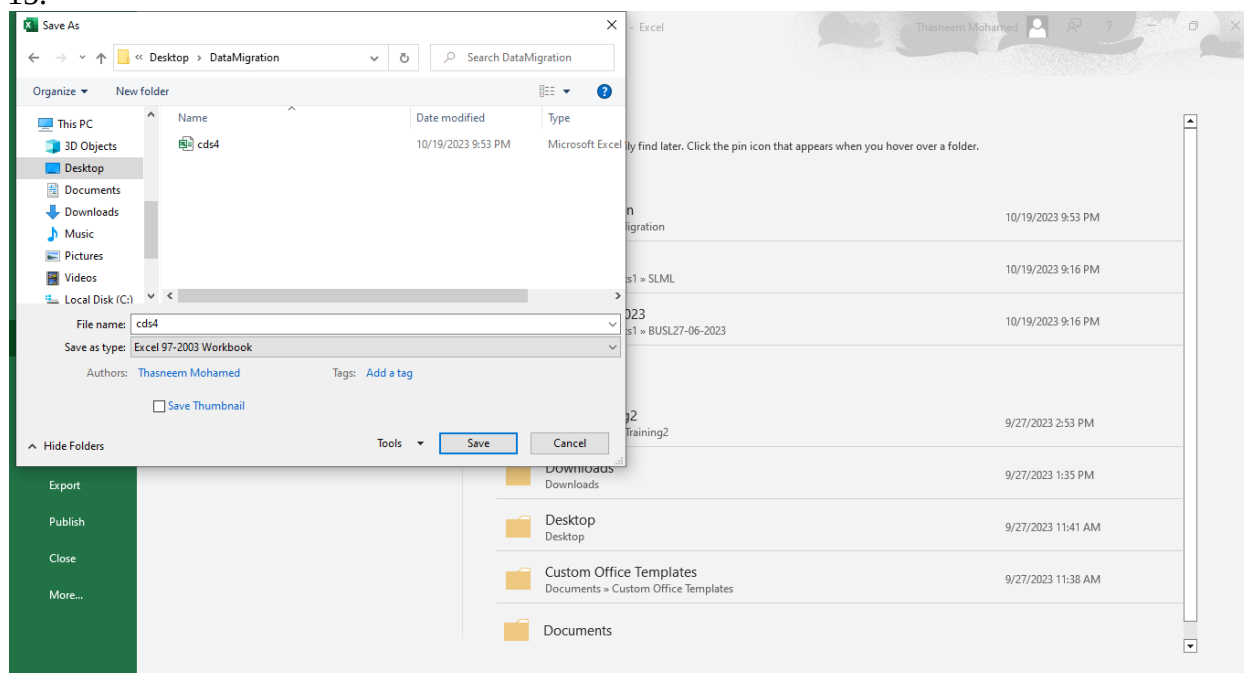


8. Convert .xlsx or csv data to .mrc data


1. Click Export Tab Delimited Text

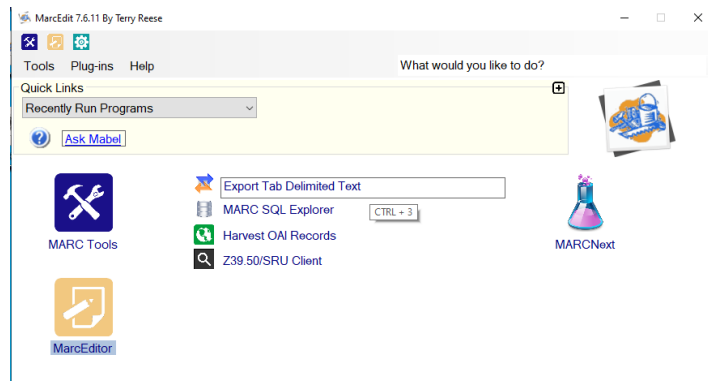


- 2.

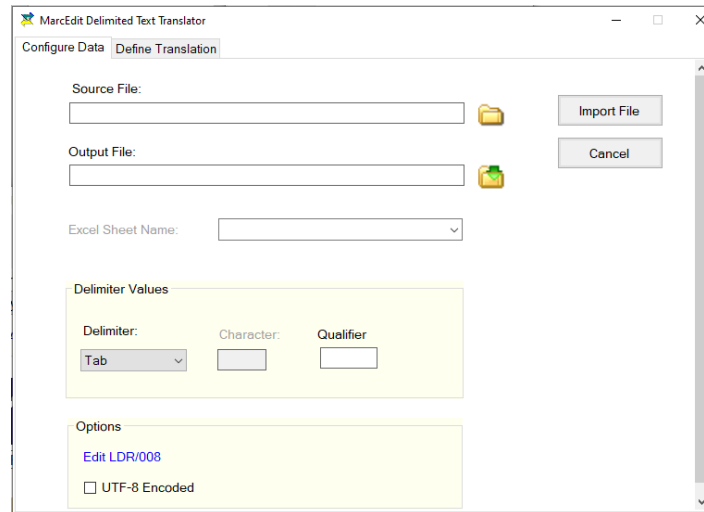


- 3.

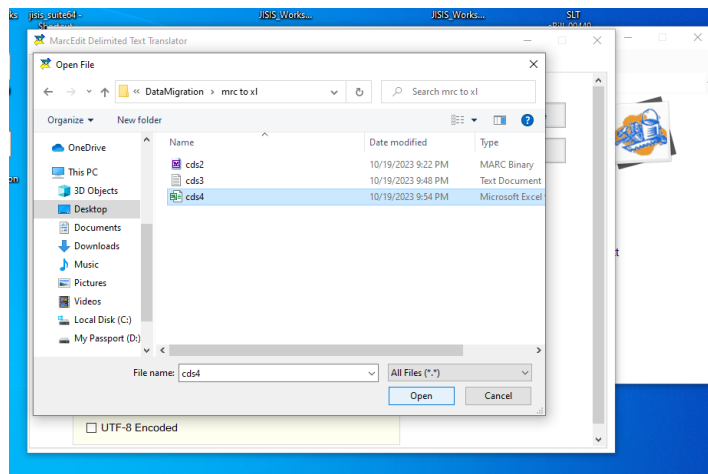


4.

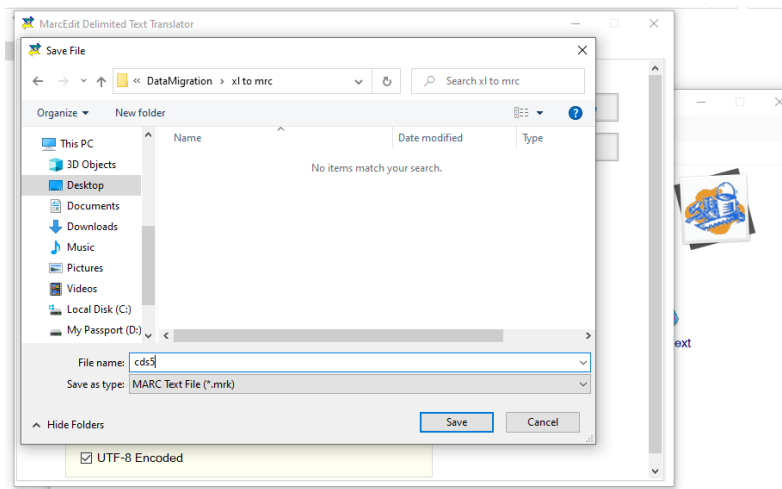

5.

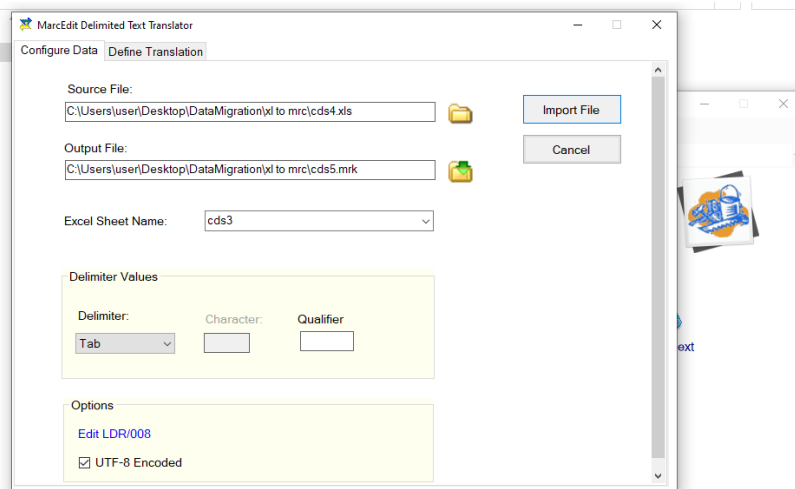

6.

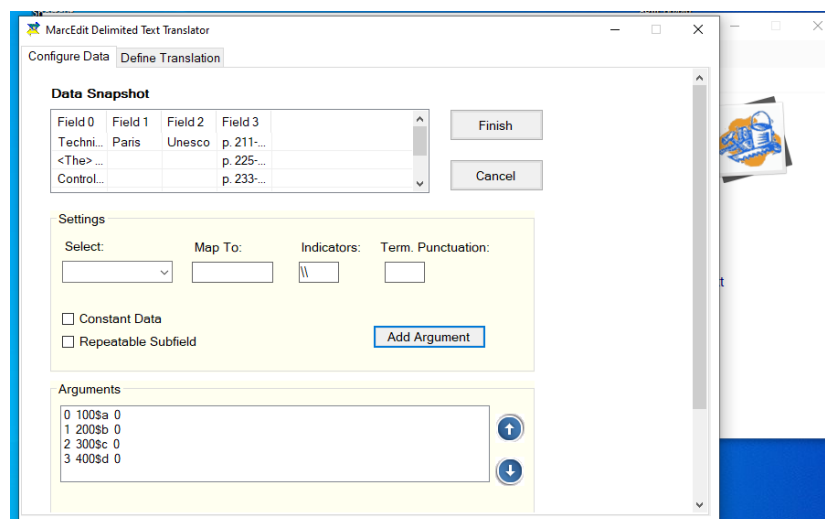

7.

