

Workshop

on

Koha Integrated Library Management System

Date: 27th to 29th October 2025


Koha Installation on Oracle VirtualBox




Organized by
National Science Library & Resource Centre (NSLRC)
National Science Foundation
47/5 Maitland Place, Colombo 07

Installation of Oracle Virtual Box


1. Go to the [VirtualBox download](#) website and hit that download link for the ‘Windows hosts’ for version 7.1.4

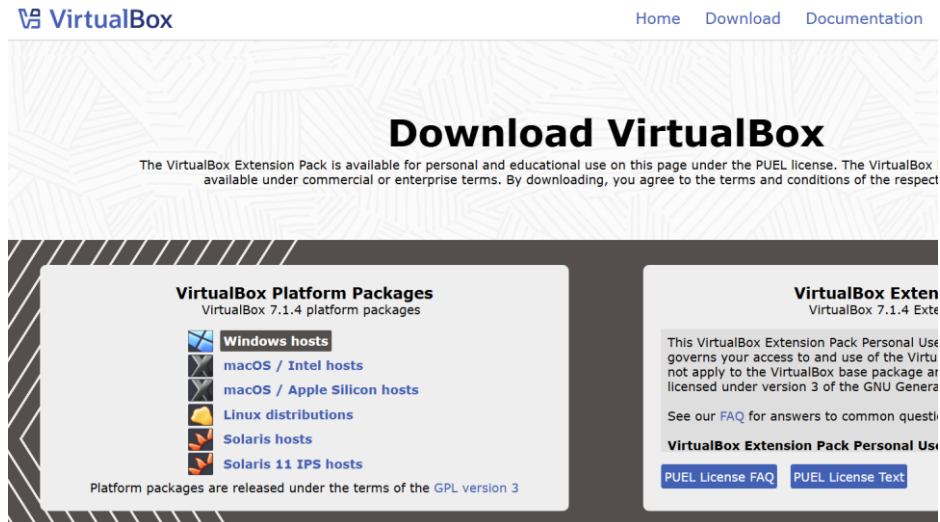


2. After a ‘DONE’ download, you will have a file called ‘Oracle_VirtualBox_Extension_Pack-7.2.2’ in your download folder. Right-click the file and choose the ‘run as administrator’ option.

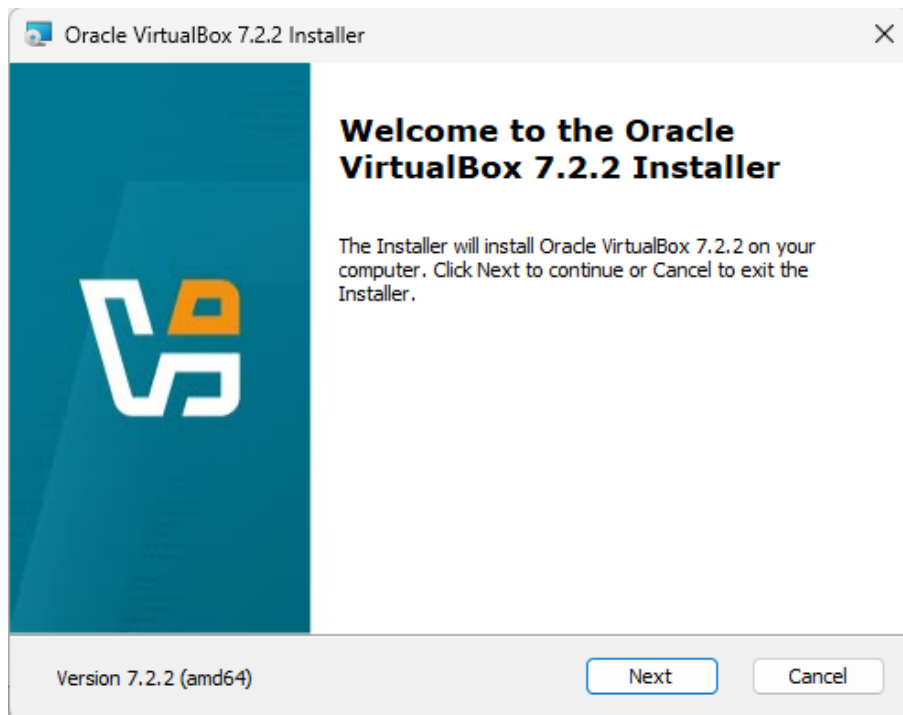


3. Click ‘Next >’ to accept the license agreement.

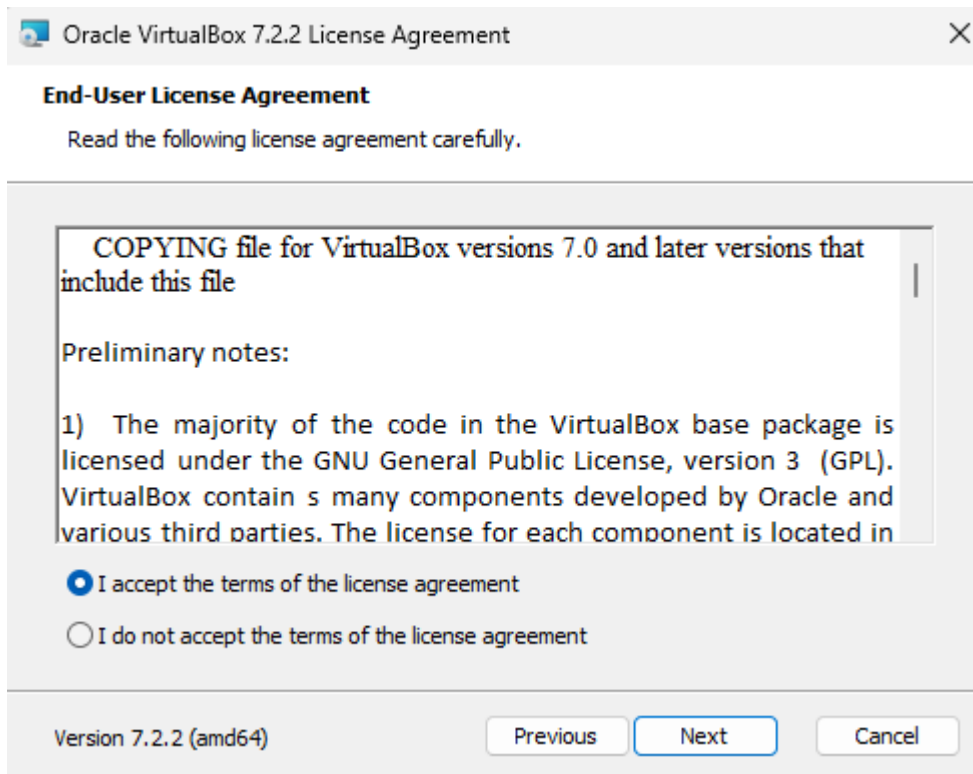


4. Click 'Next >' to start the setup procedure.

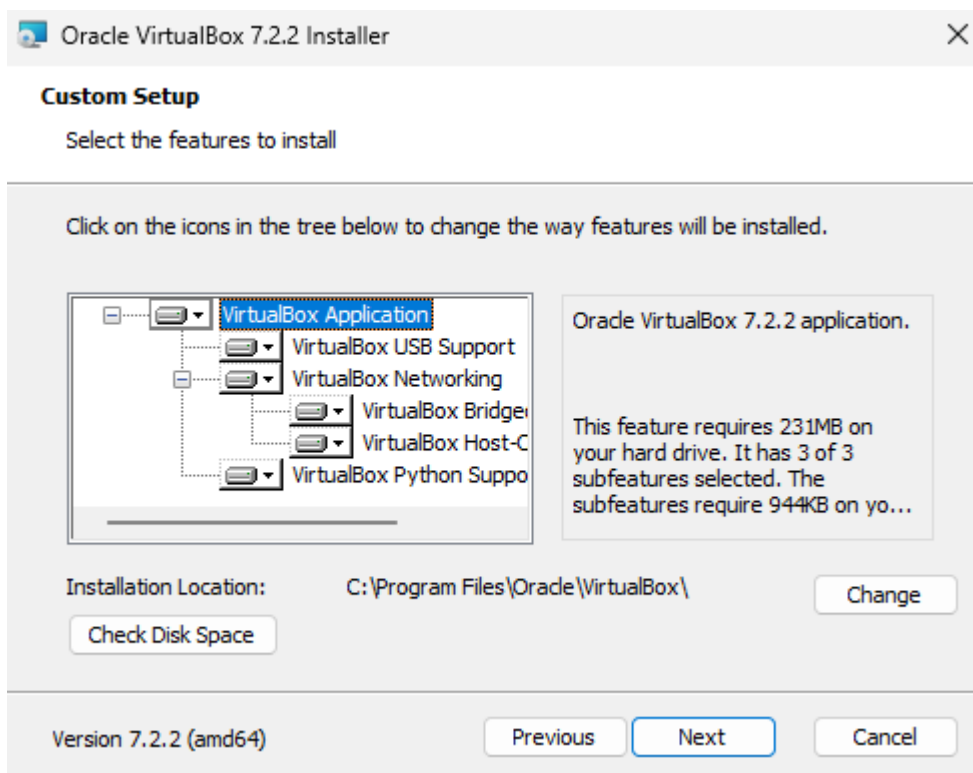


5. Leave all the fields as default and click 'Next >'

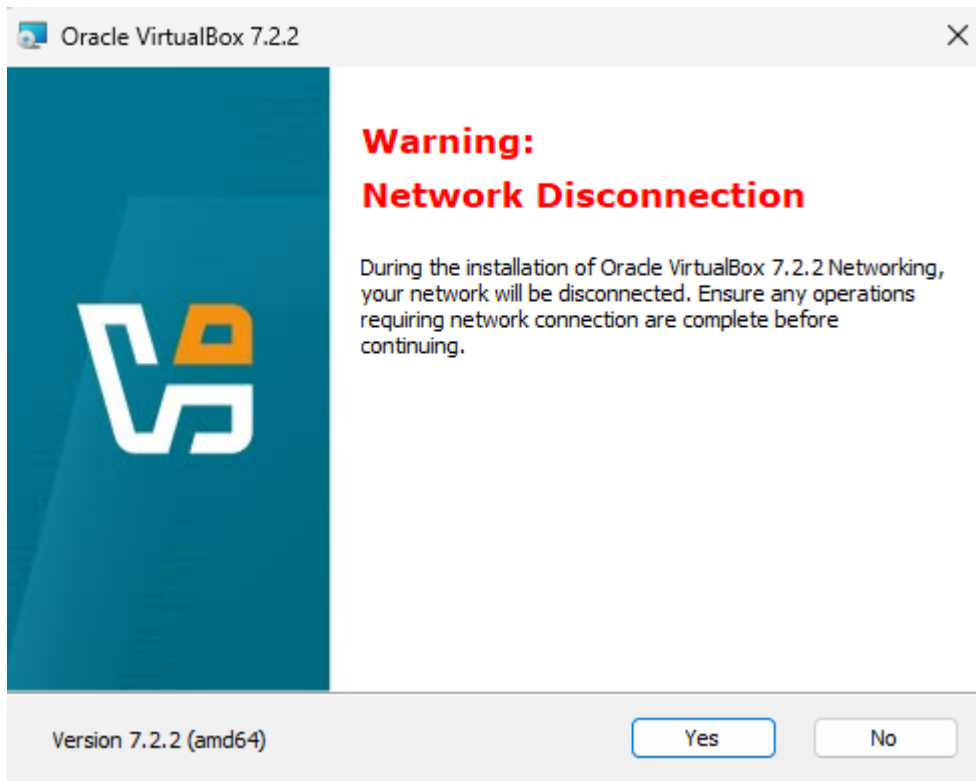


6. Take notion of the warning and hit 'Yes' when ready.

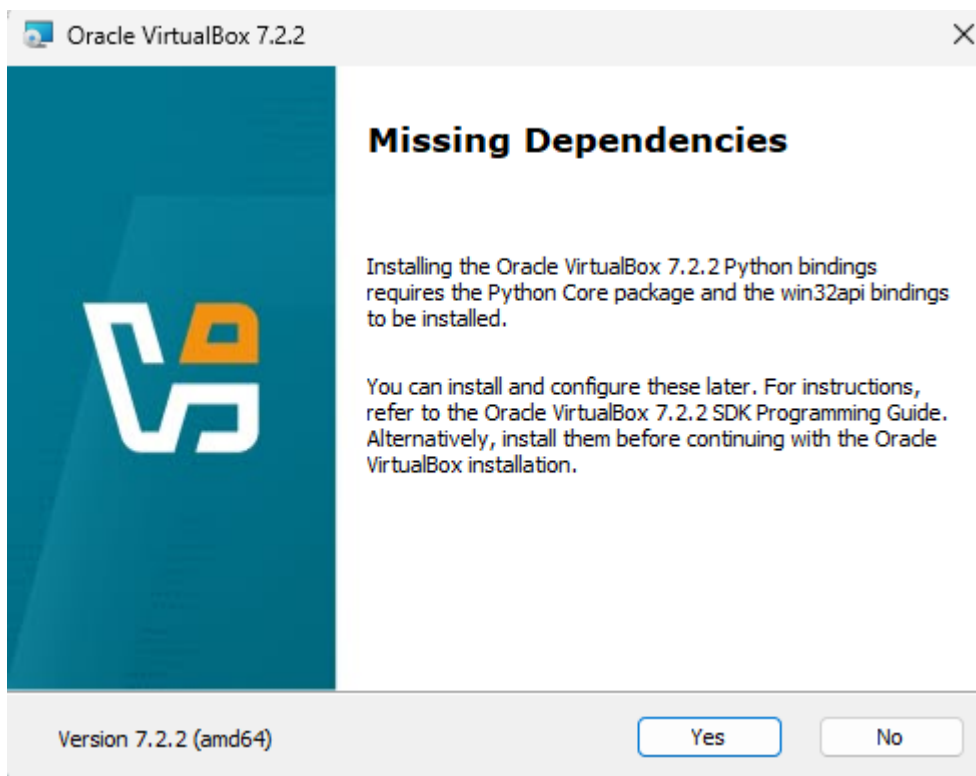


7. Get informed and just hit 'Yes'; We're not using this API thus we don't need any Python installation!

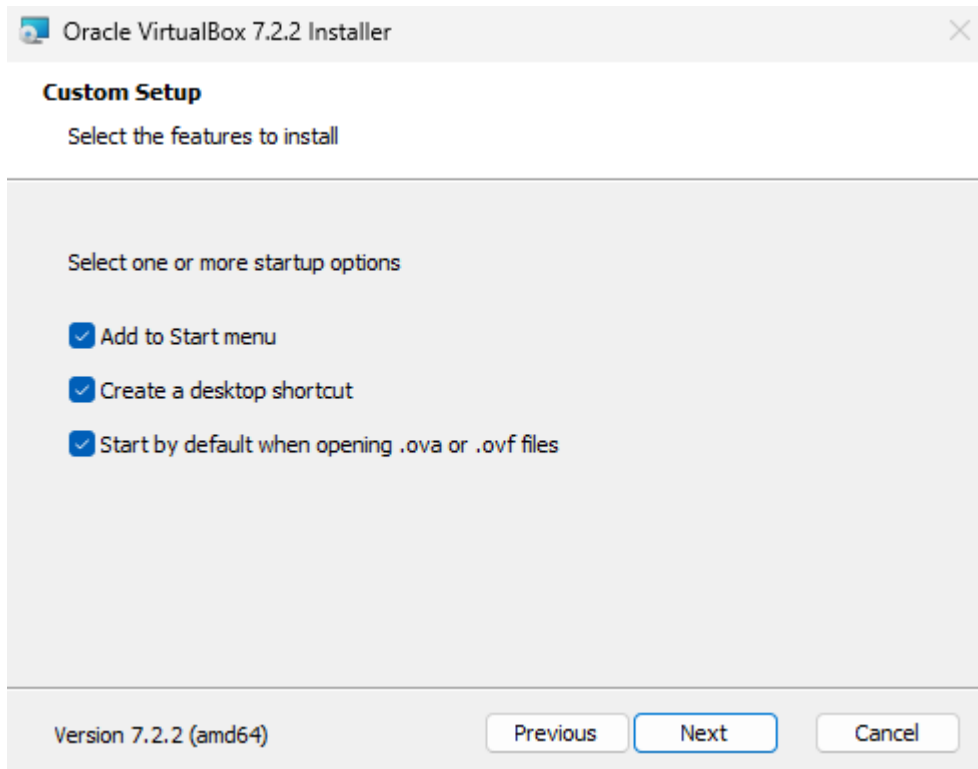


8. Click Next

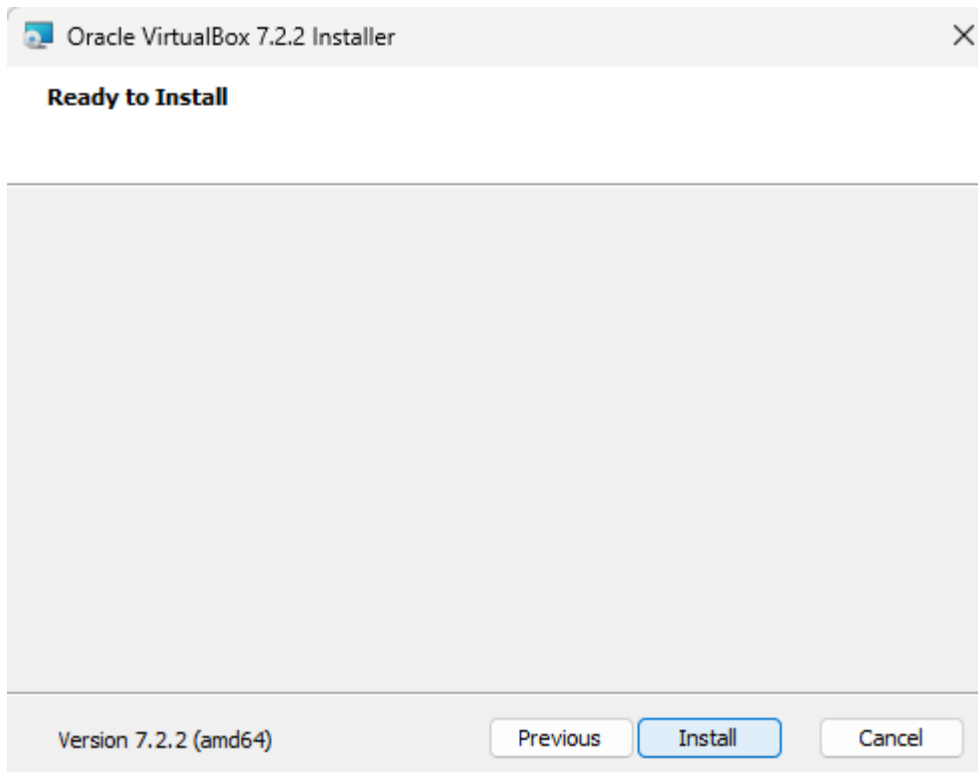

9. Hit the 'Install' button to start the installation of the 'VirtualBox' software.

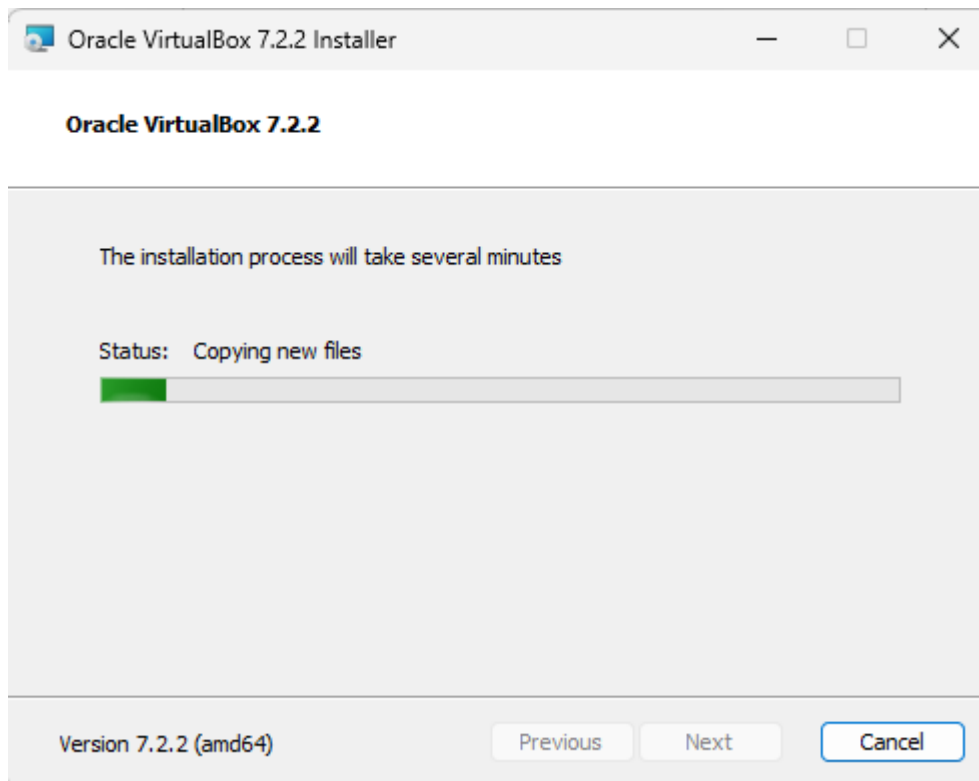

10. Click 'Finish', finalize it all, and immediately start 'Oracle VM VirtualBox'.

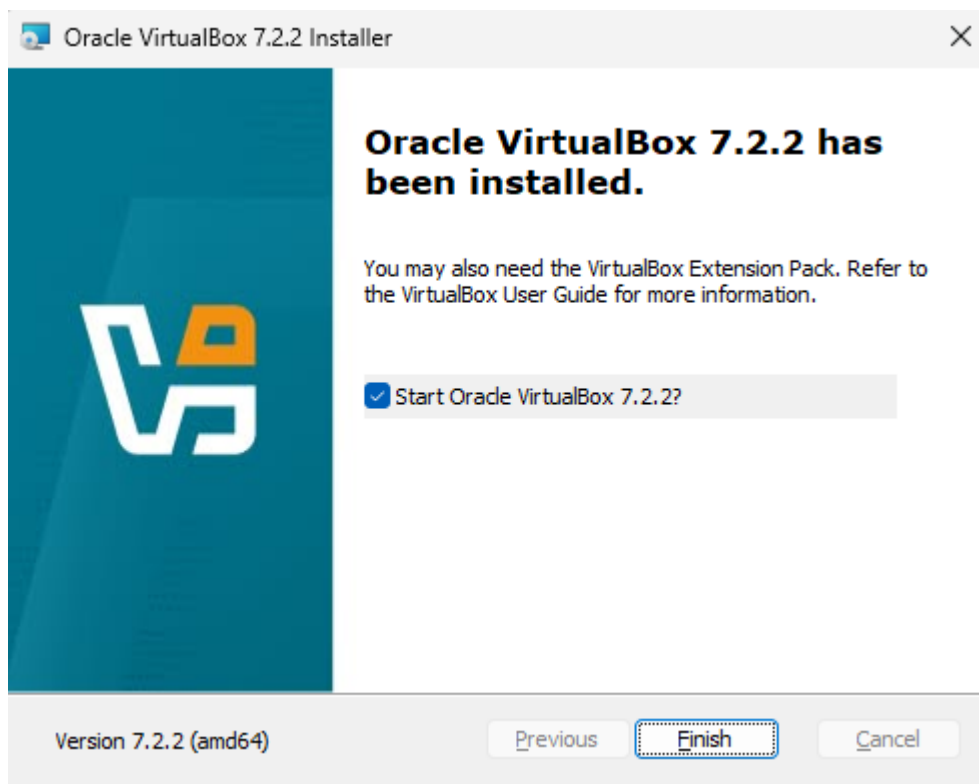

Download the Ubuntu Image

Now let's download Ubuntu.

First, go to the [Ubuntu Releases](https://releases.ubuntu.com/) page (<https://releases.ubuntu.com/>) on the Ubuntu website to find the latest version of Ubuntu that has long term support (LTS).

As of the date of this writing, the latest version is **Ubuntu 24.04 LTS (Noble Numbat)**.

Click on “**Ubuntu 24.04 LTS (Noble Numbat)**”.



Click on the **64-bit PC (AMD64) desktop image**.

Ubuntu 24.04.1 (Noble Numbat)

Select an image

Ubuntu is distributed on four types of images described below.

Desktop image

The desktop image allows you to try Ubuntu without changing your computer at all, and at your option to install it permanently later. This type of image is what most people will want to use. You will need at least 1024MiB of RAM to install from this image.

64-bit PC (AMD64) desktop image

Choose this if you have a computer based on the AMD64 or EM64T architecture (e.g., Athlon64, Opteron, EM64T Xeon, Core 2). Choose this if you are at all unsure.


This .iso file is large. It will take a while to download. Just go do something else and come back to it when it is finished.

Create a Virtual Machine

Now that VirtualBox is installed, we need to create a new virtual machine using the Ubuntu image we downloaded earlier.

Open Virtual Box.



Click the **New** button in the toolbar.

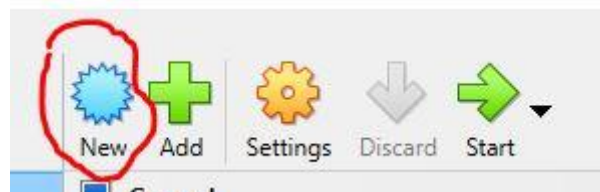

Name and Operating System

First, let's complete the "Name and Operating System" section.

On the "**Name**" line, type in a descriptive name for your operating system. I will call mine "**Ubuntu24.04**".

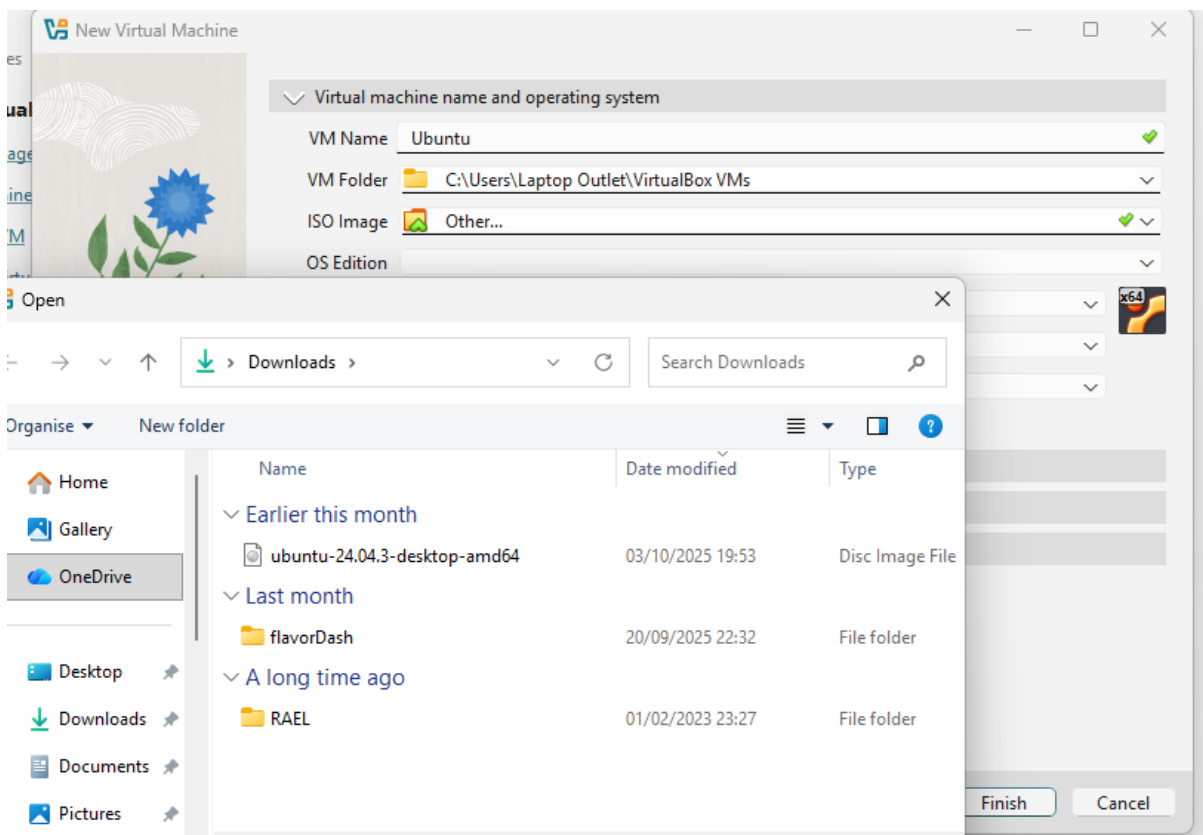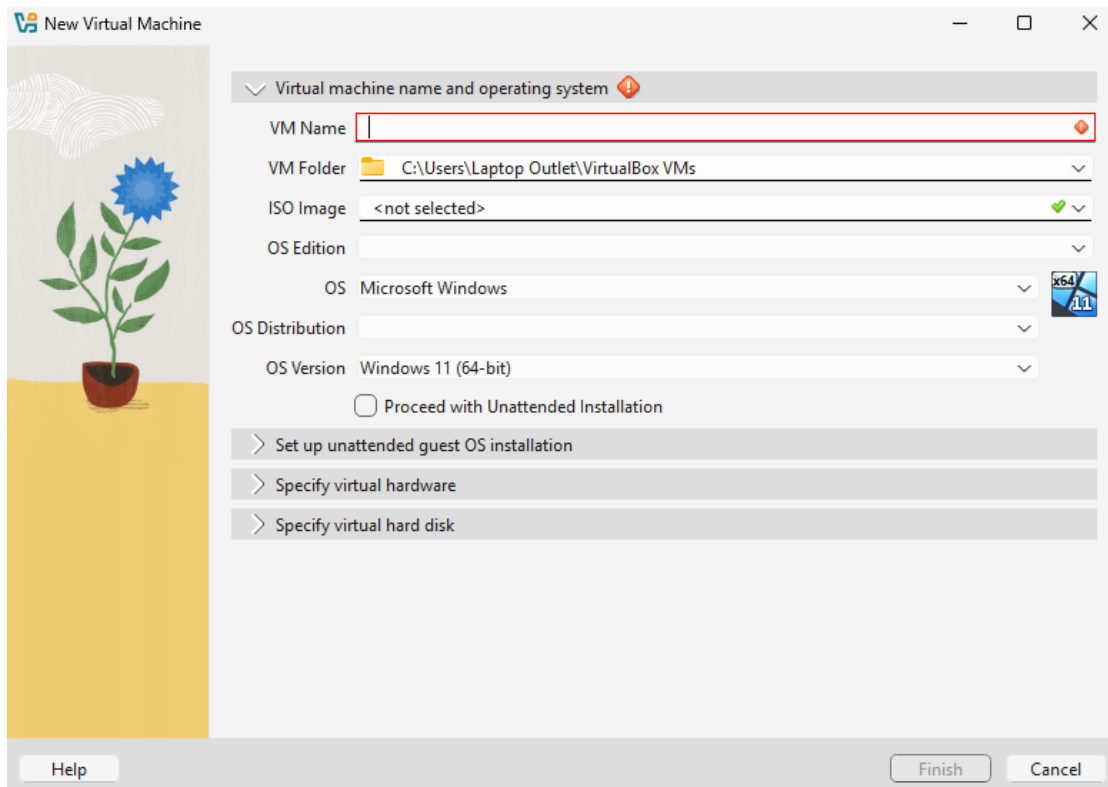

On the “**Folder**” line, you can keep the default Folder path. This folder is where your virtual machines will be stored.

On the “**ISO Image**” line, select the path to the Ubuntu .iso file you downloaded earlier.

On the “**Type**” line, select **Linux**.

On the “**Subtype**” line, select **Ubuntu**.


On the “**Version**” line, select **Ubuntu (64-bit)**.


Select “**Skip Unattended Installation**”. By selecting this option, we will manually go through the entire installation process of the operating system.

Hardware

Click on the arrow next to “**Hardware**” to expand the menu options.

vboxuser

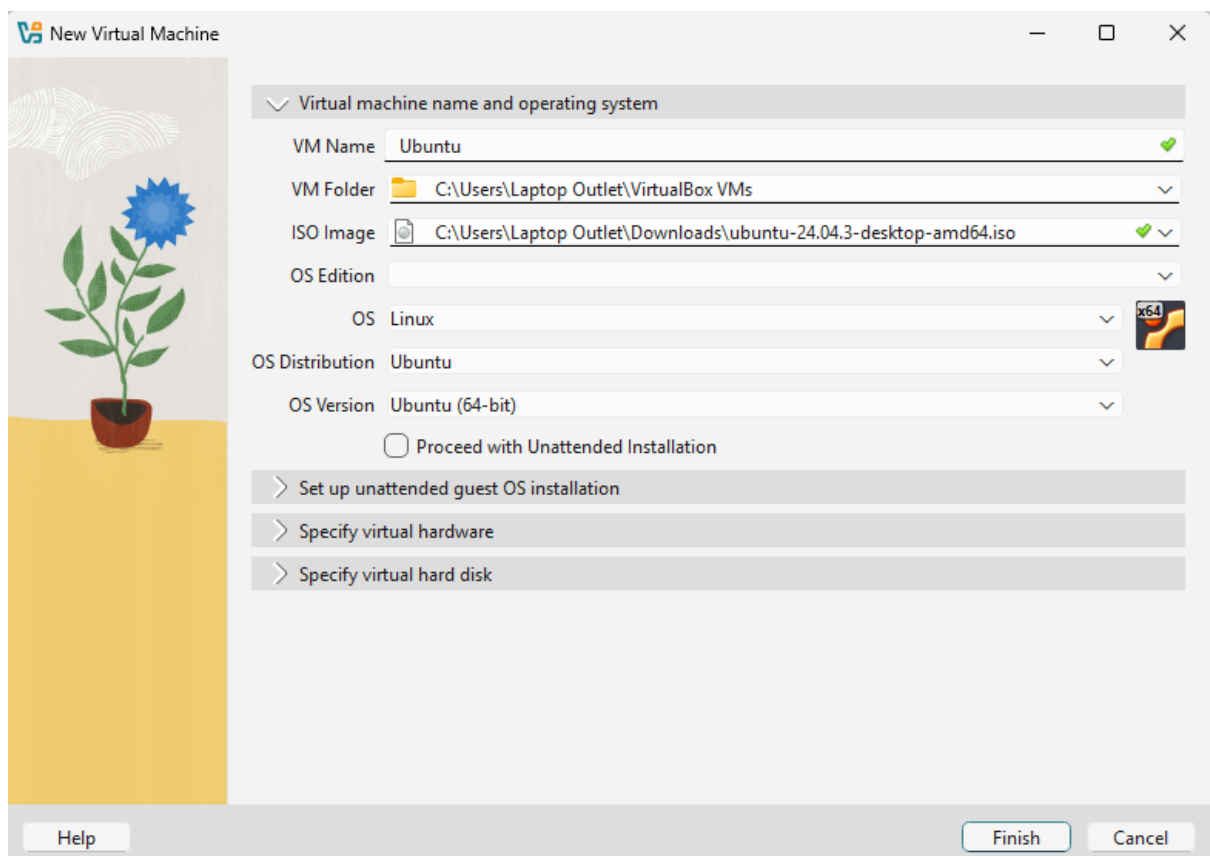

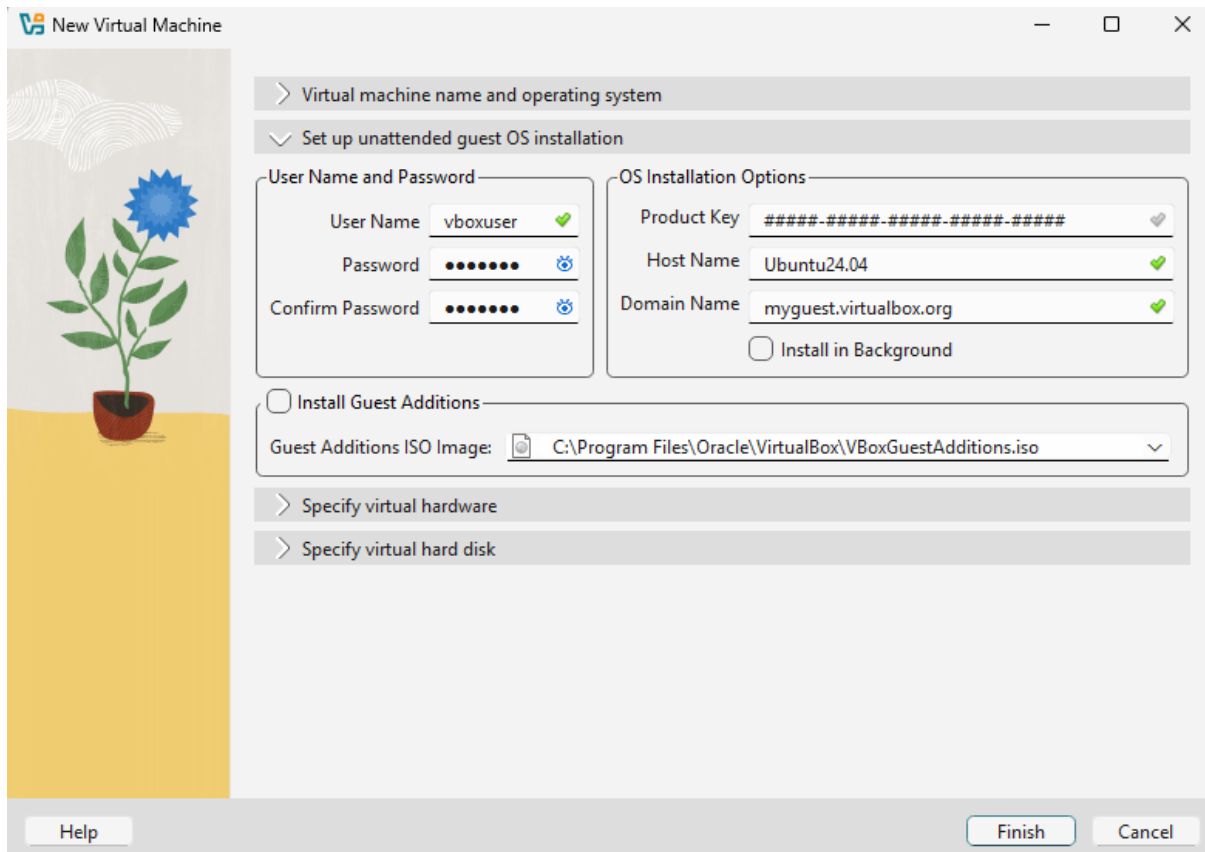The image shows the 'New Virtual Machine' window in Oracle VM VirtualBox. On the left is a decorative panel with a blue flower in a red pot on a yellow surface. The main area contains several expandable sections. The first section, 'Virtual machine name and operating system', is expanded. Below it is 'Set up unattended guest OS installation', also expanded. This section contains two sub-sections: 'User Name and Password' and 'OS Installation Options'. 'User Name and Password' has fields for 'User Name' (vboxuser), 'Password' (masked with dots), and 'Confirm Password' (masked with dots). 'OS Installation Options' has fields for 'Product Key' (masked with asterisks), 'Host Name' (Ubuntu24.04), and 'Domain Name' (myguest.virtualbox.org). There is an unchecked checkbox for 'Install in Background'. Below these is an unchecked checkbox for 'Install Guest Additions' and a dropdown for 'Guest Additions ISO Image' pointing to 'C:\Program Files\Oracle\VirtualBox\VBBoxGuestAdditions.iso'. At the bottom are three expandable sections: 'Specify virtual hardware', 'Specify virtual hard disk', and 'Specify virtual network'. At the very bottom are 'Help', 'Finish', and 'Cancel' buttons.

New Virtual Machine

> Virtual machine name and operating system

Set up unattended guest OS installation

User Name and Password

User Name: vboxuser ✓

Password: ●●●●●●

Confirm Password: ●●●●●●

OS Installation Options

Product Key: #####-####-####-####-#### ✓

Host Name: Ubuntu24.04 ✓

Domain Name: myguest.virtualbox.org ✓

☐ Install in Background

☐ Install Guest Additions

Guest Additions ISO Image: C:\Program Files\Oracle\VirtualBox\VBBoxGuestAdditions.iso

> Specify virtual hardware


> Specify virtual hard disk

Help Finish Cancel


On the “**Base Memory**” line, move the slider to **16384 MB** (megabytes).

Setup 8192 MB (8GB) for Base Memory

On the “**Processors**” line, select **8 CPUs**. If your computer supports it, you can set a higher number.

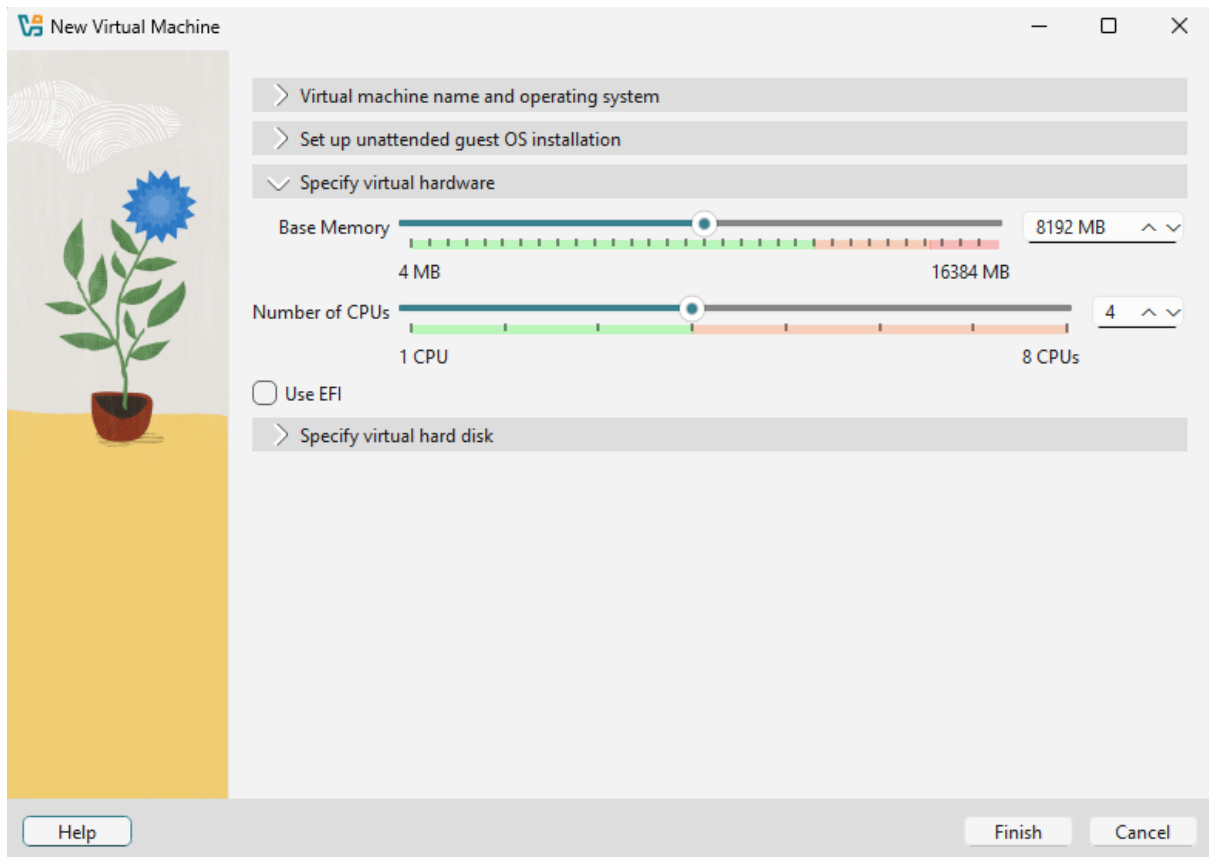

Click on the arrow next to “**Hard Disk**” to expand the menu options.

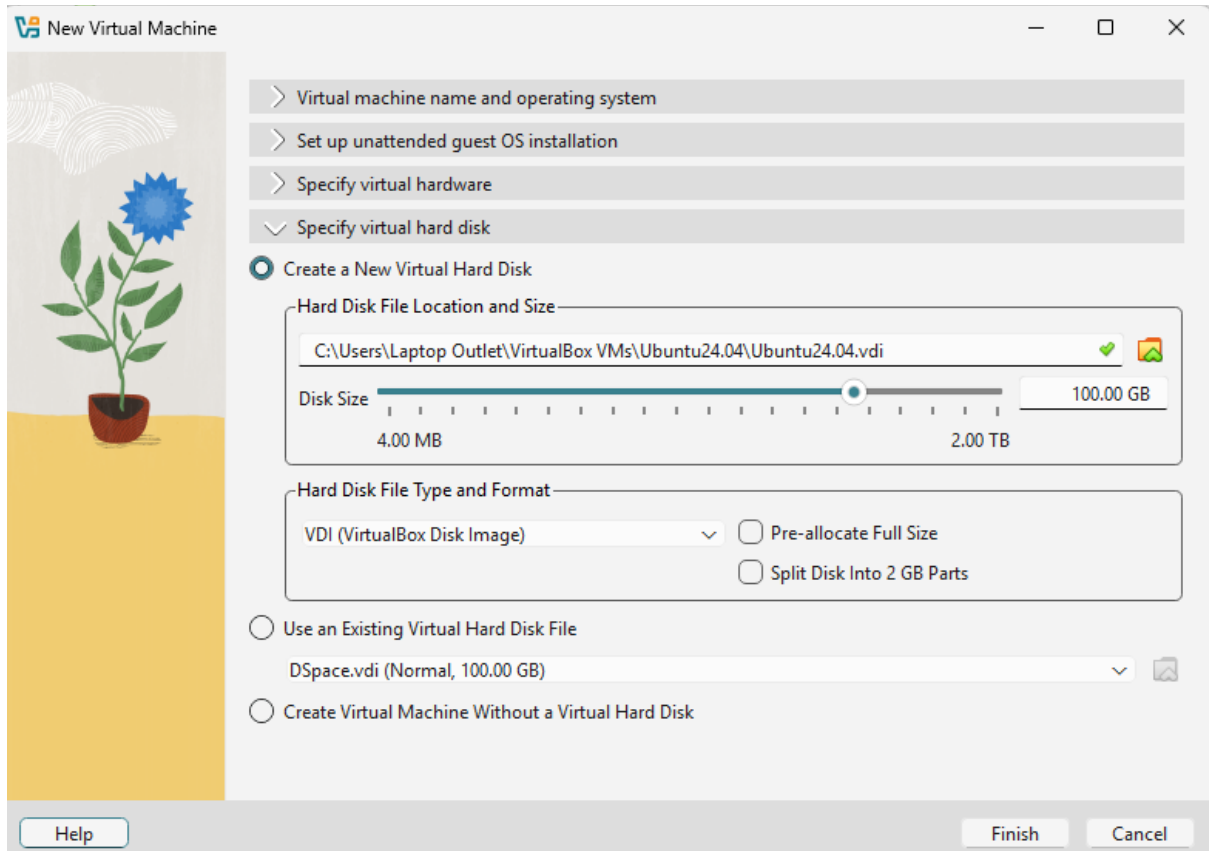

Click on the slider bar to set **100.00 GB** for the storage space.

Click **“Finish”**.


Highlight Ubuntu24.04, and click Settings.




Click **Display**.

A startup window will appear.

Select **“Try or Install Ubuntu”** by **Pressing Enter**.

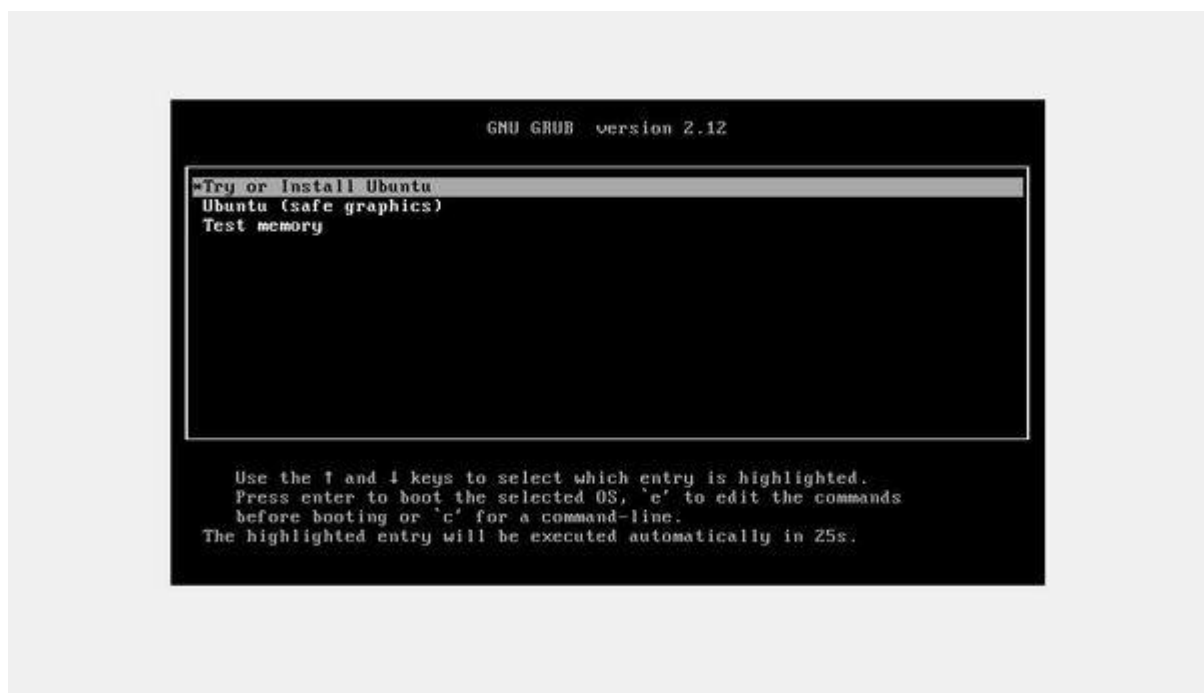


Choose your language. I will select **“English”**.

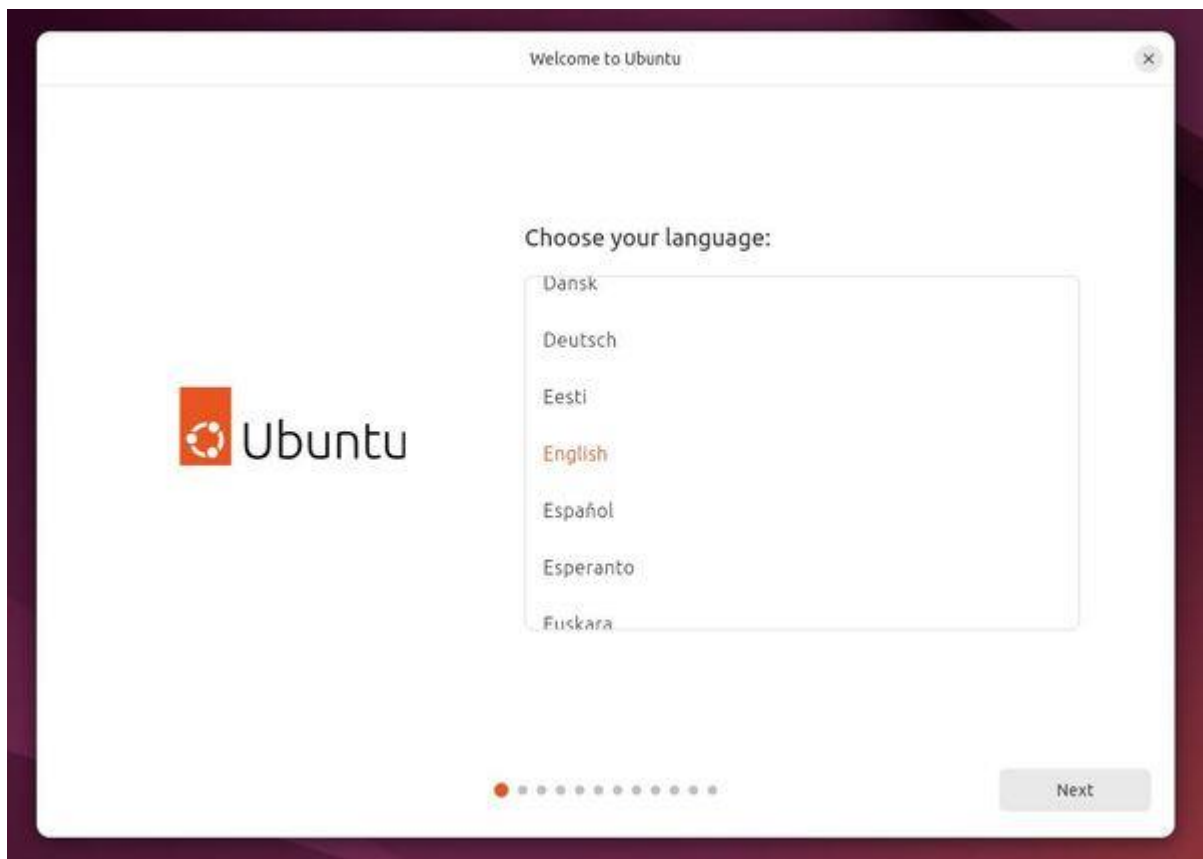


Click Next.


On the “Accessibility in Ubuntu” panel, **click Next.**

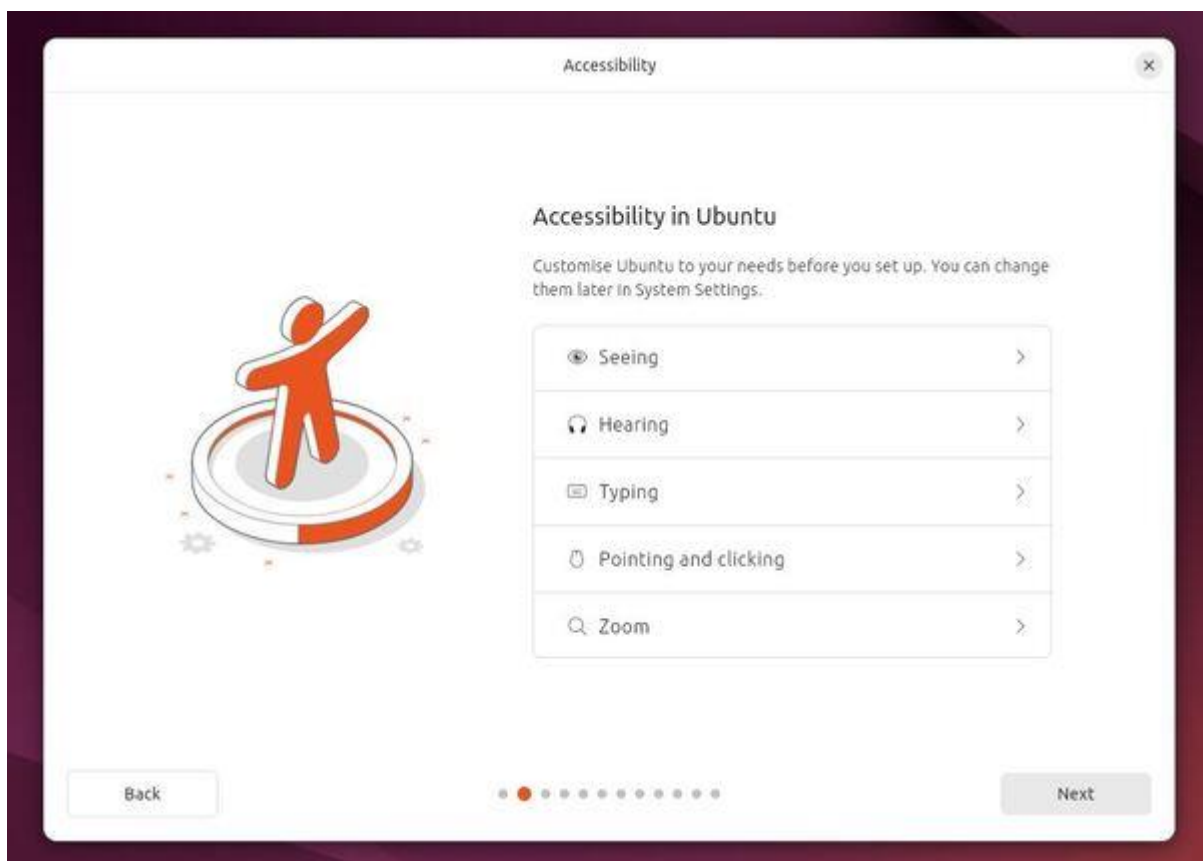

On the “Keyboard layout” panel, select your desired keyboard layout, and **click Next**.

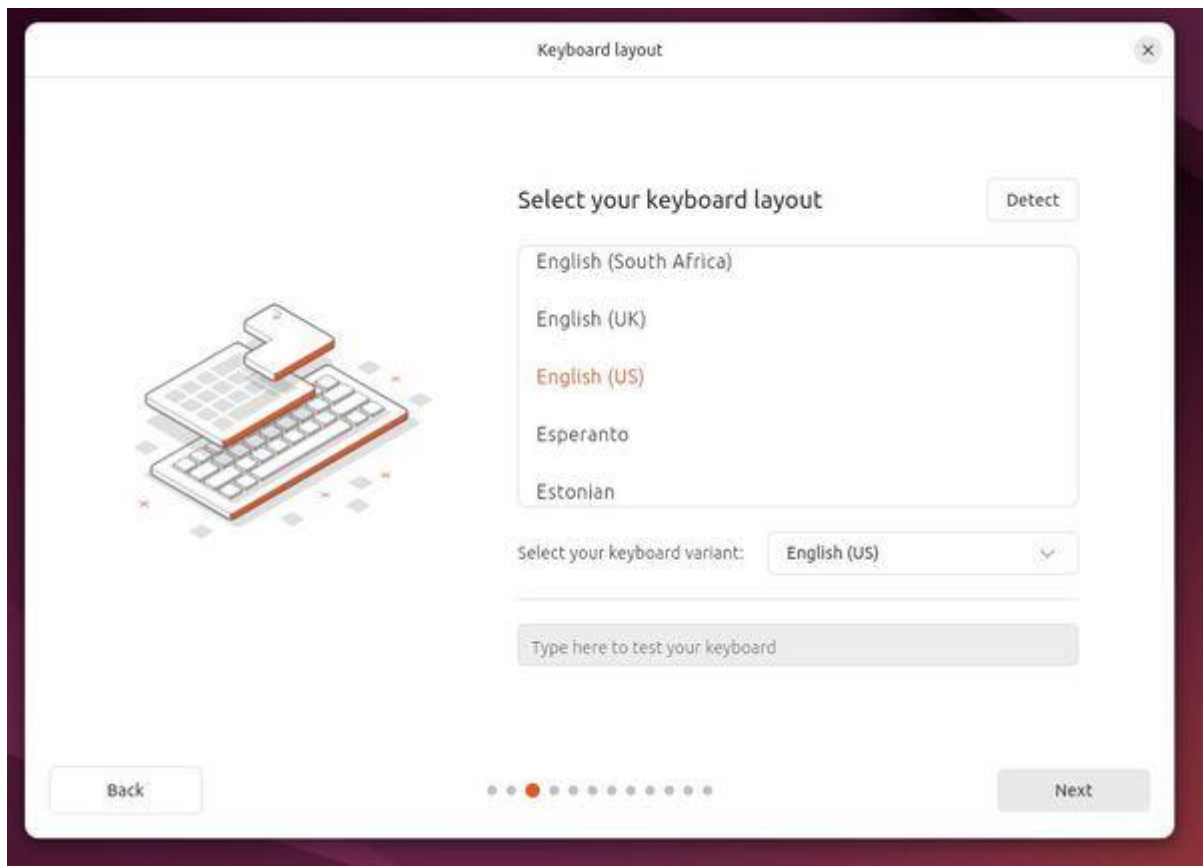


On the “Connect to the internet” panel, select “Use wired connection”, and **click Next**.

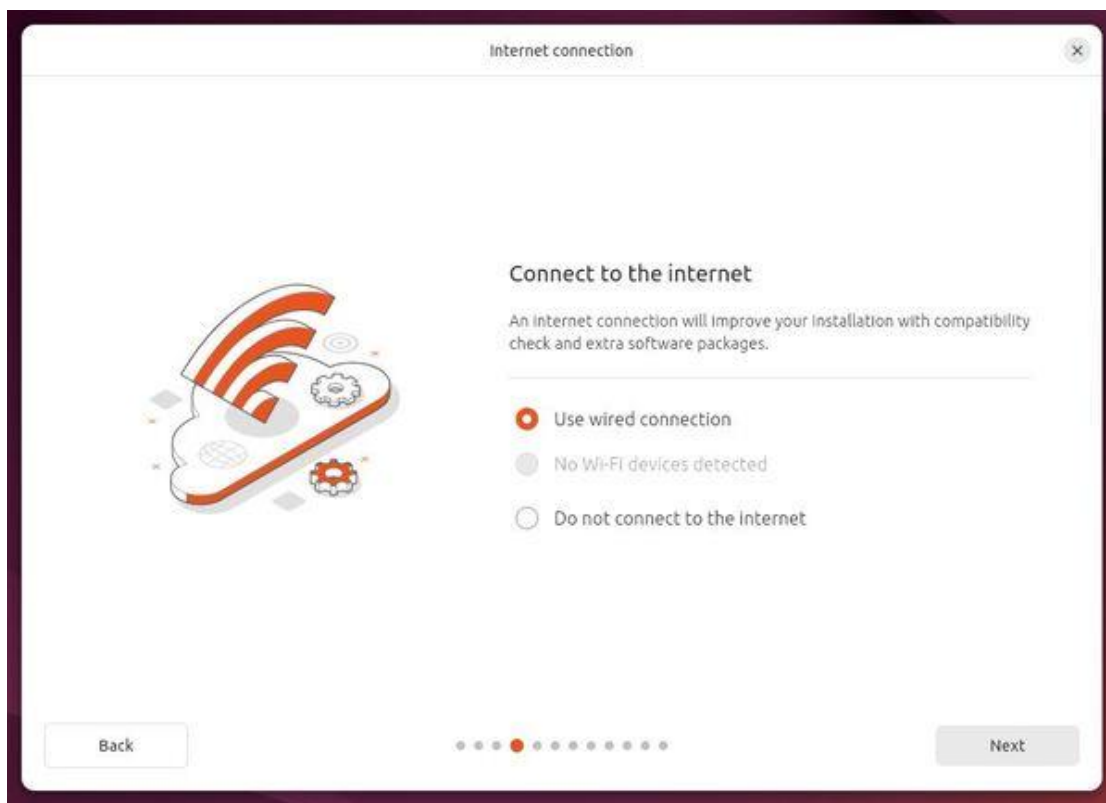


If you get prompted to update the Ubuntu installer, do that now.

Then click the “Install Ubuntu 24.04.1 LTS” icon on the Ubuntu desktop to continue the installation.


On the “What do you want to do with Ubuntu?” panel, select “Install Ubuntu”, and then **click Next**.

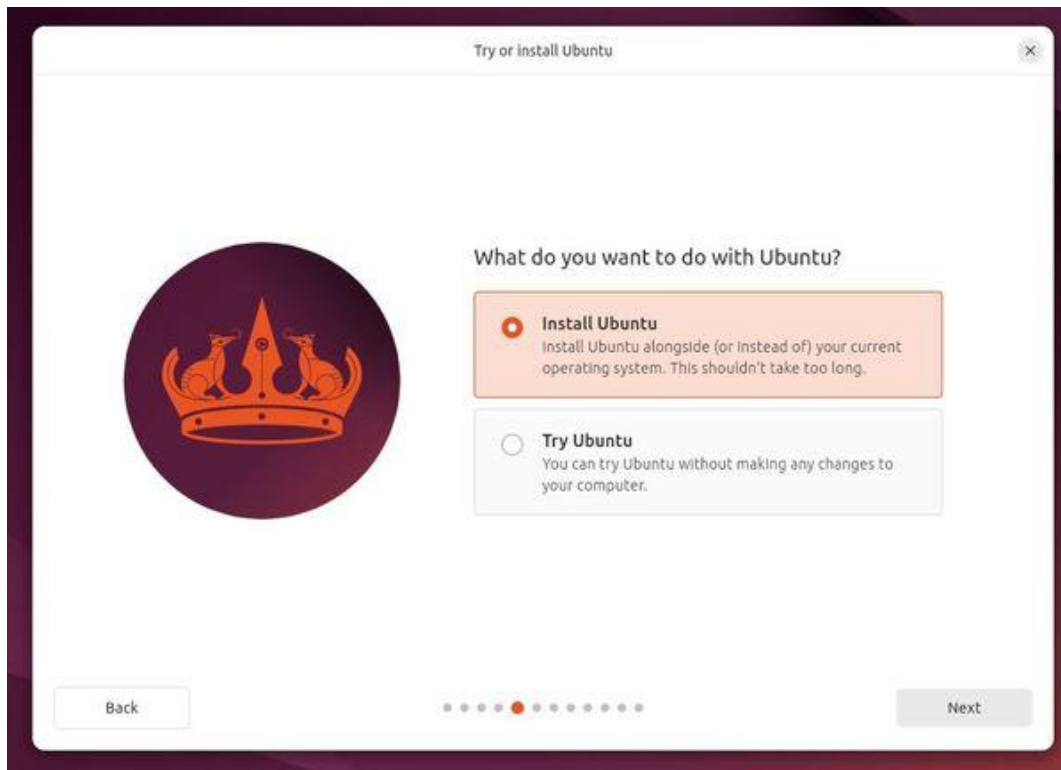


On the “How would you like to install Ubuntu?” panel, select “Interactive installation”, and then **click Next**.

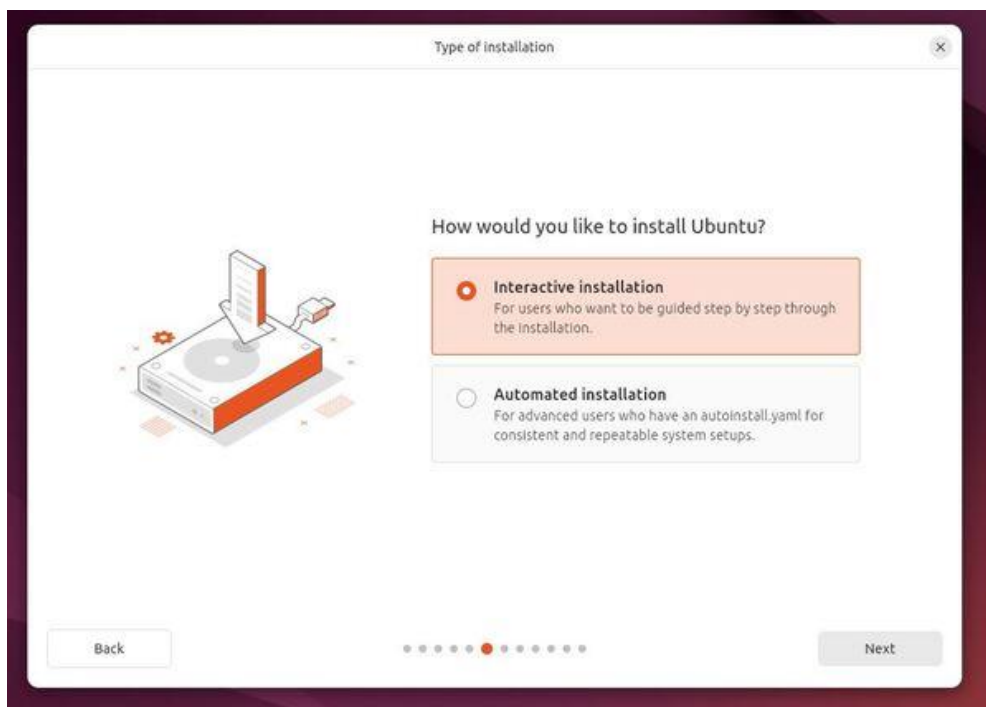


On the “What apps would you like to install to start with?” panel, select the “Default selection”, and then **click Next**.

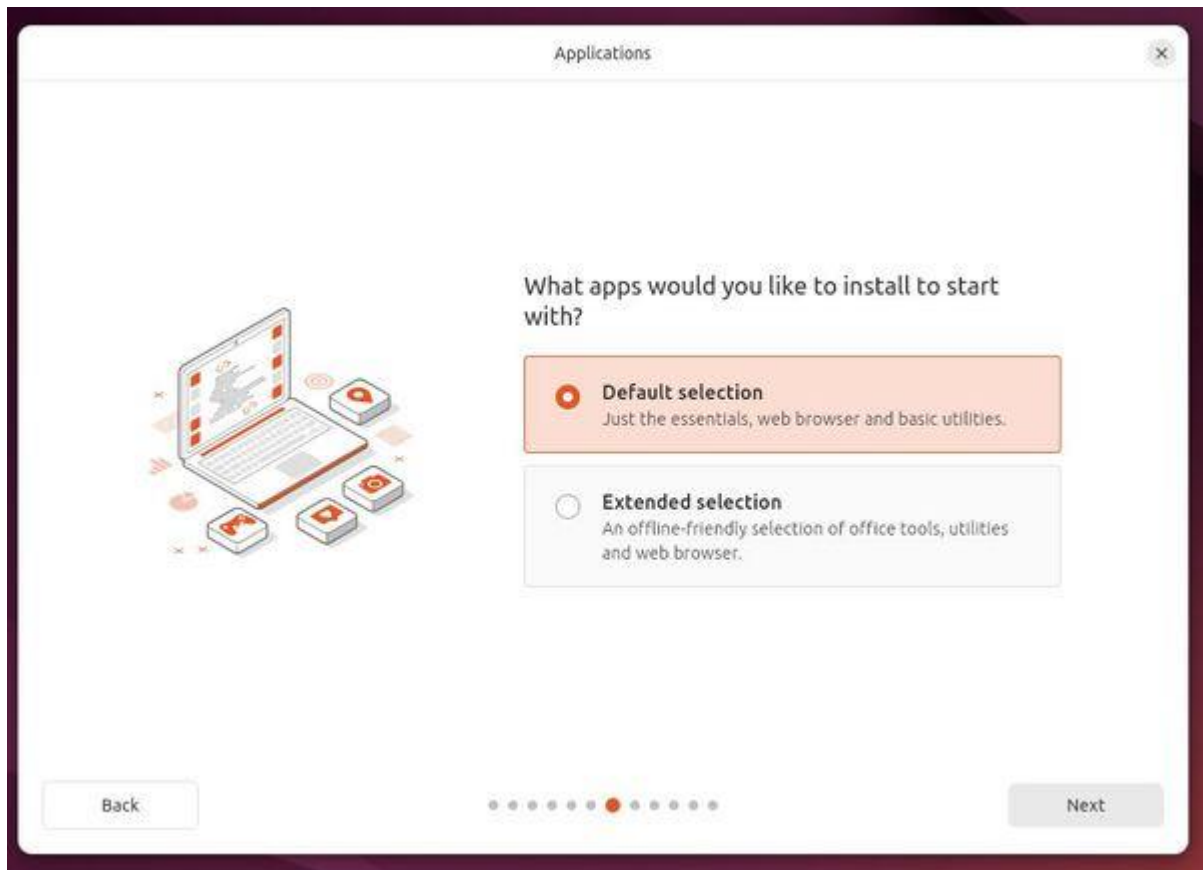

On the “Install recommended proprietary software?” panel, **select both checkboxes, and then click Next.**

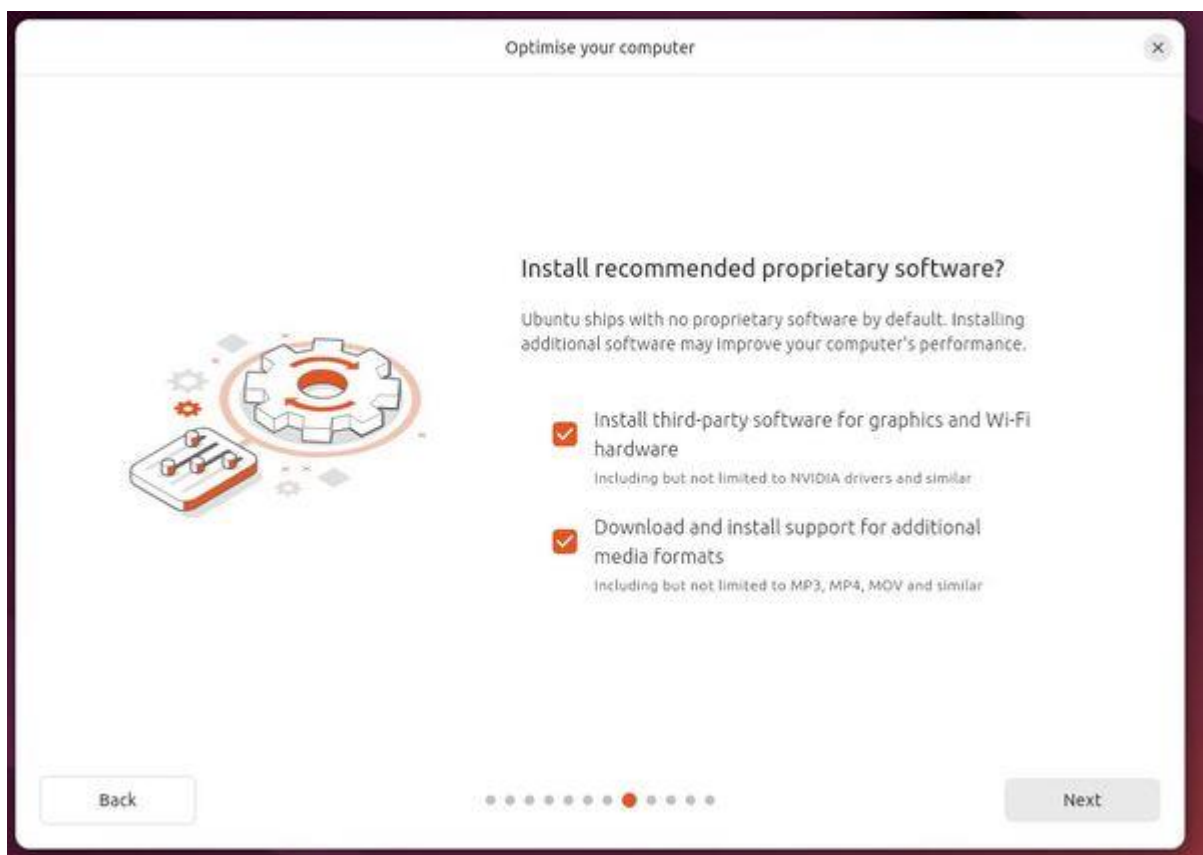


On the “How do you want to install Ubuntu?” panel, select “Erase disk and install Ubuntu”.

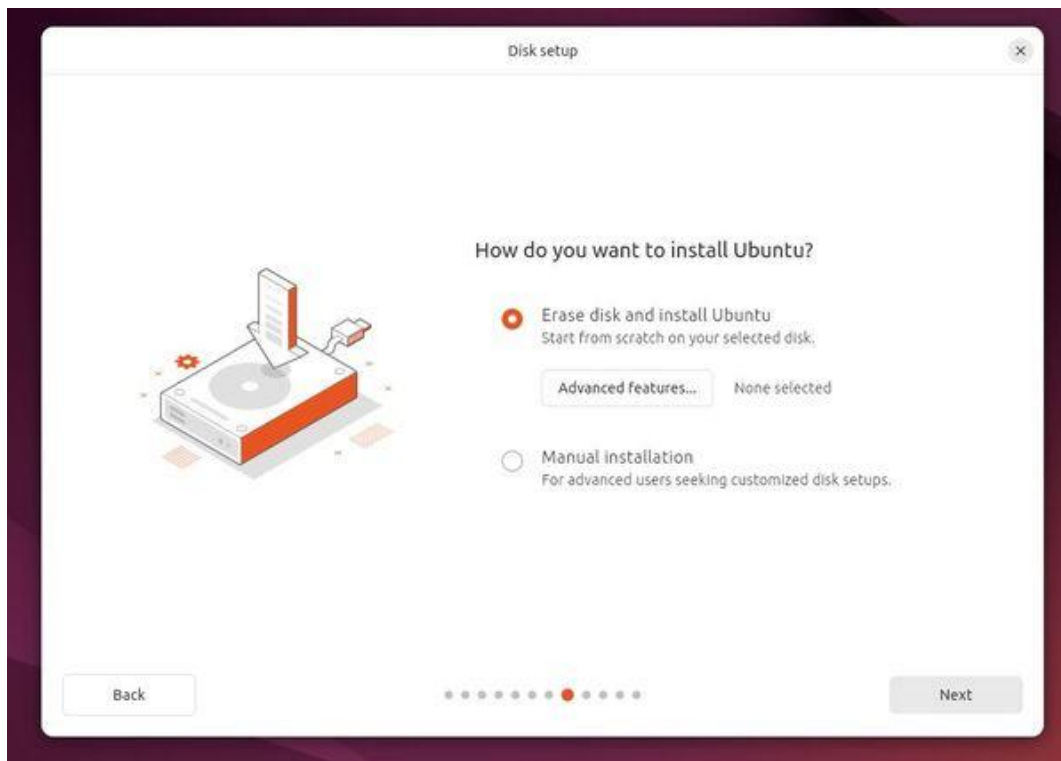

Click Next.

On the “Create your account” panel, fill in your information with your desired name (e.g. “ubuntu”). Also fill in your password.

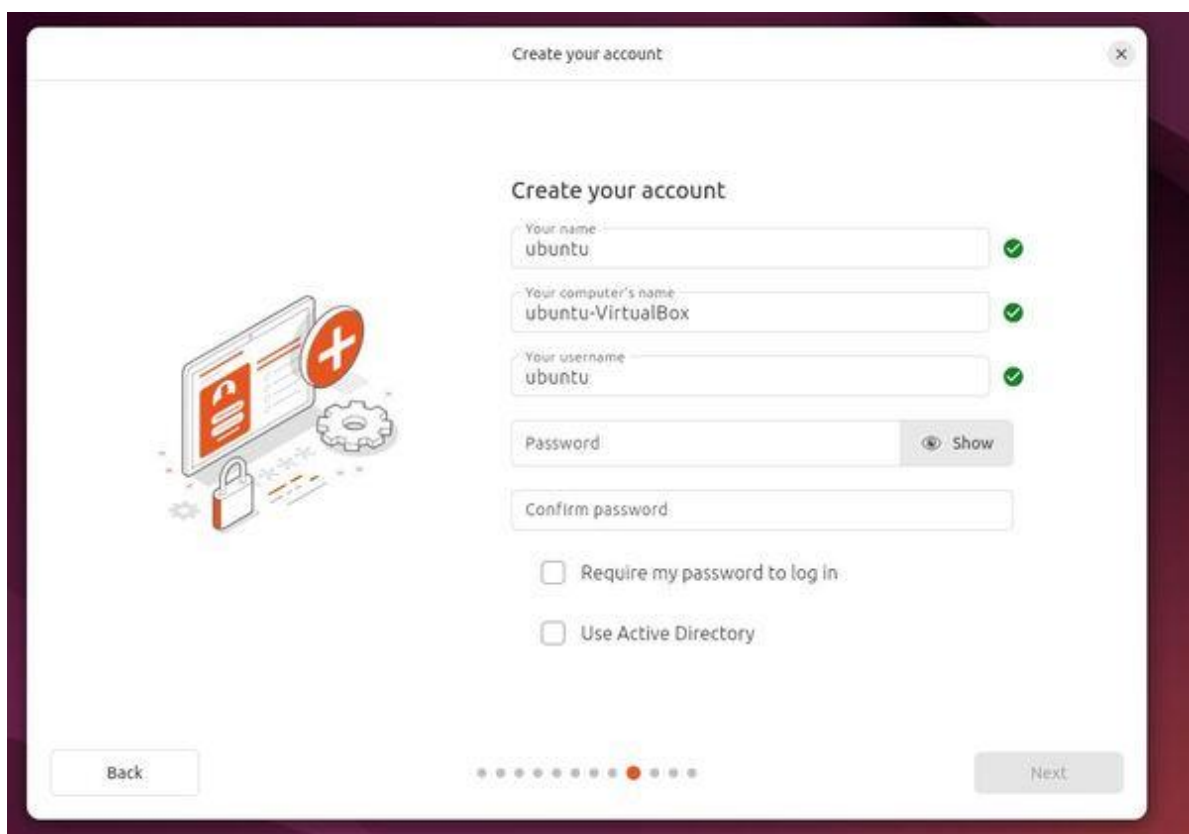


Deselect “Require my password to log in”.

Click Next.


Select your time zone, and then **click Next. Select Sri Lanka**




On the “Review your choices” panel, **click Install.**

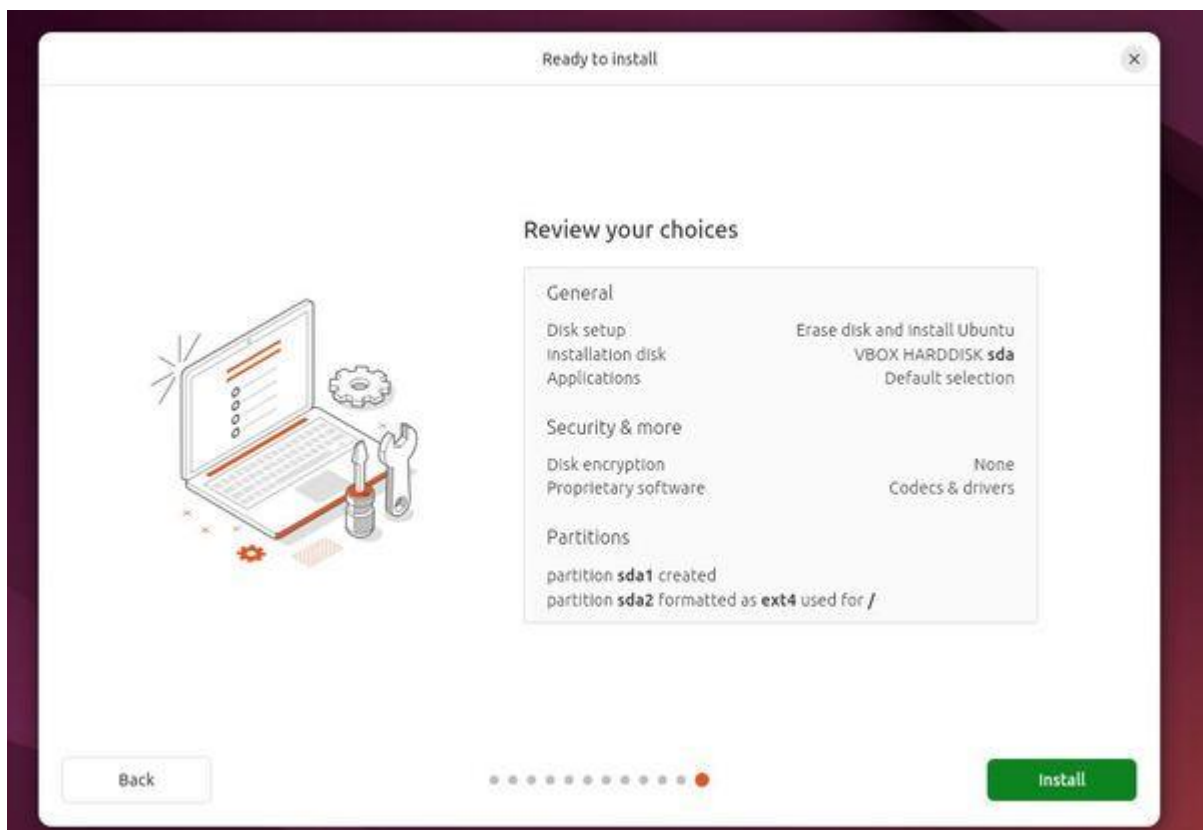


Sit back and relax while Ubuntu installs.

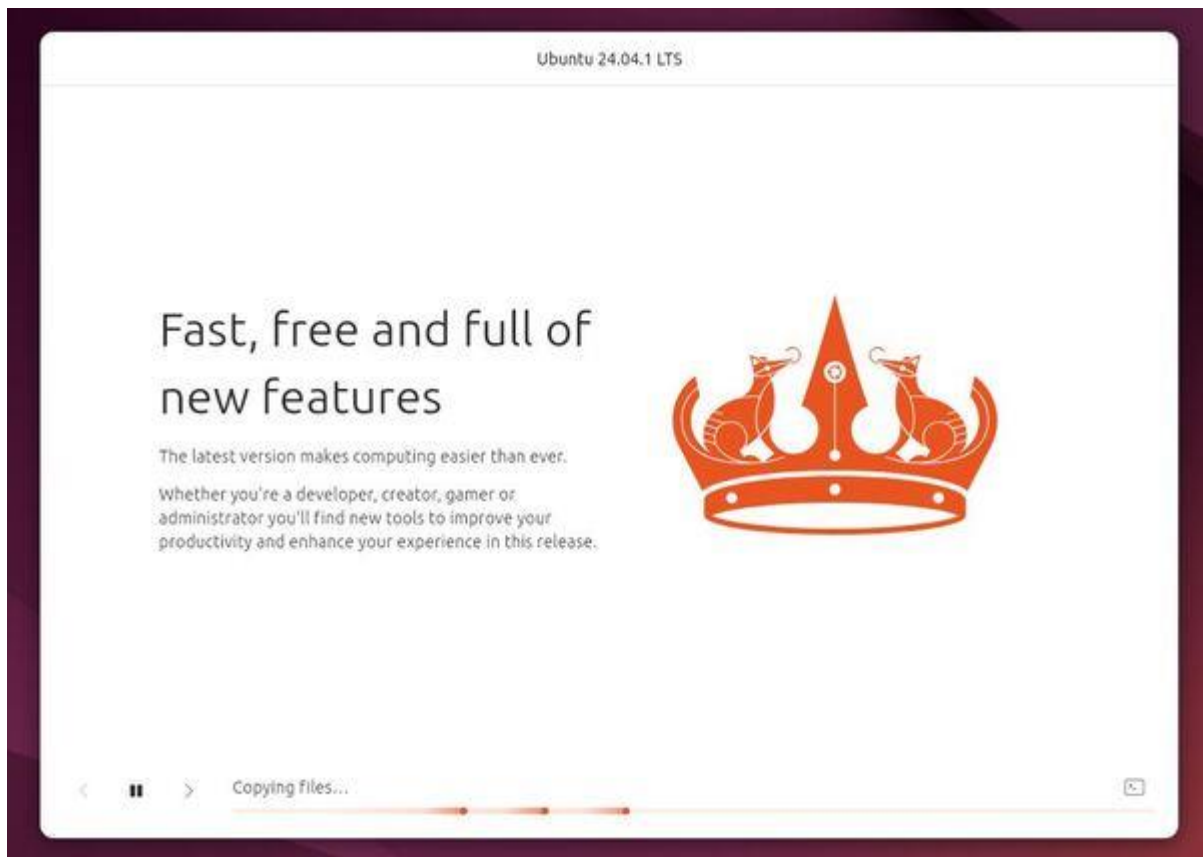

Click “Restart now” when the installation finishes.

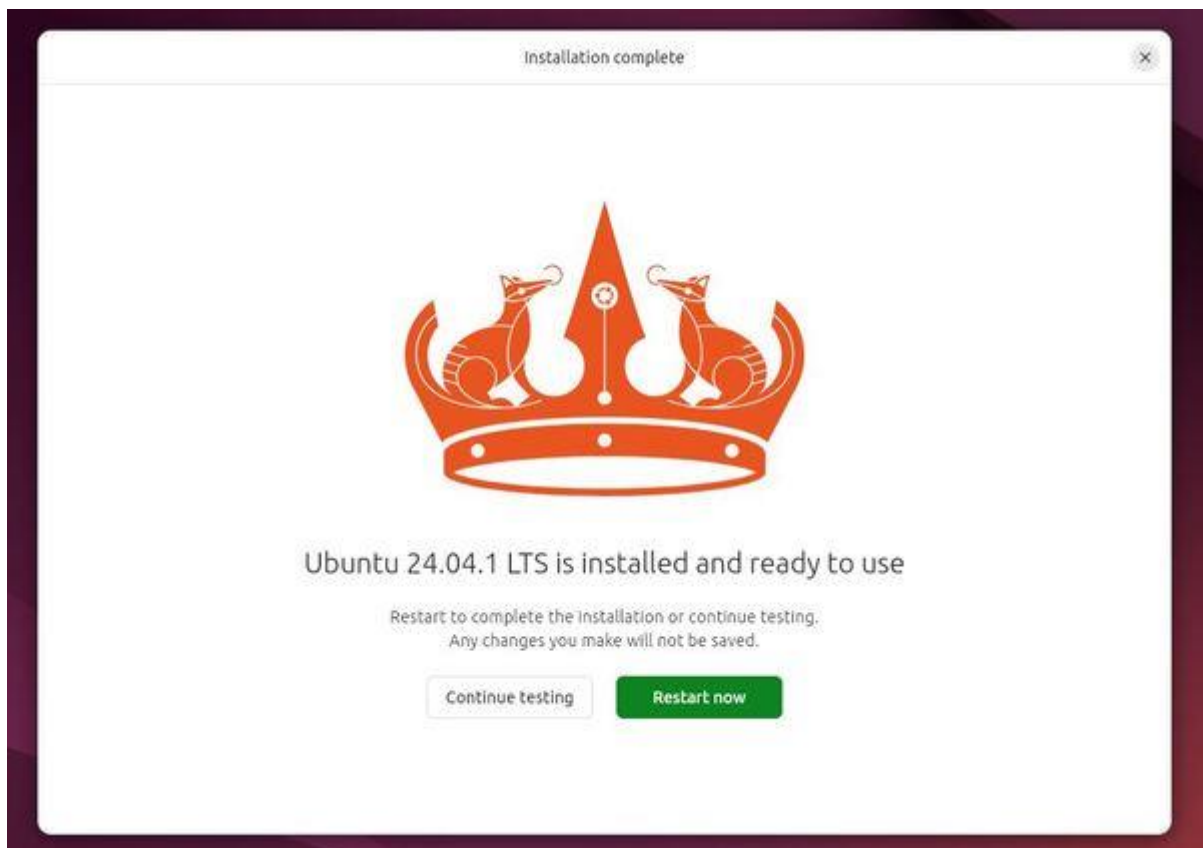


When you see a message that says “Please remove the installation medium, then press Enter”, **press Enter** on your keyboard.

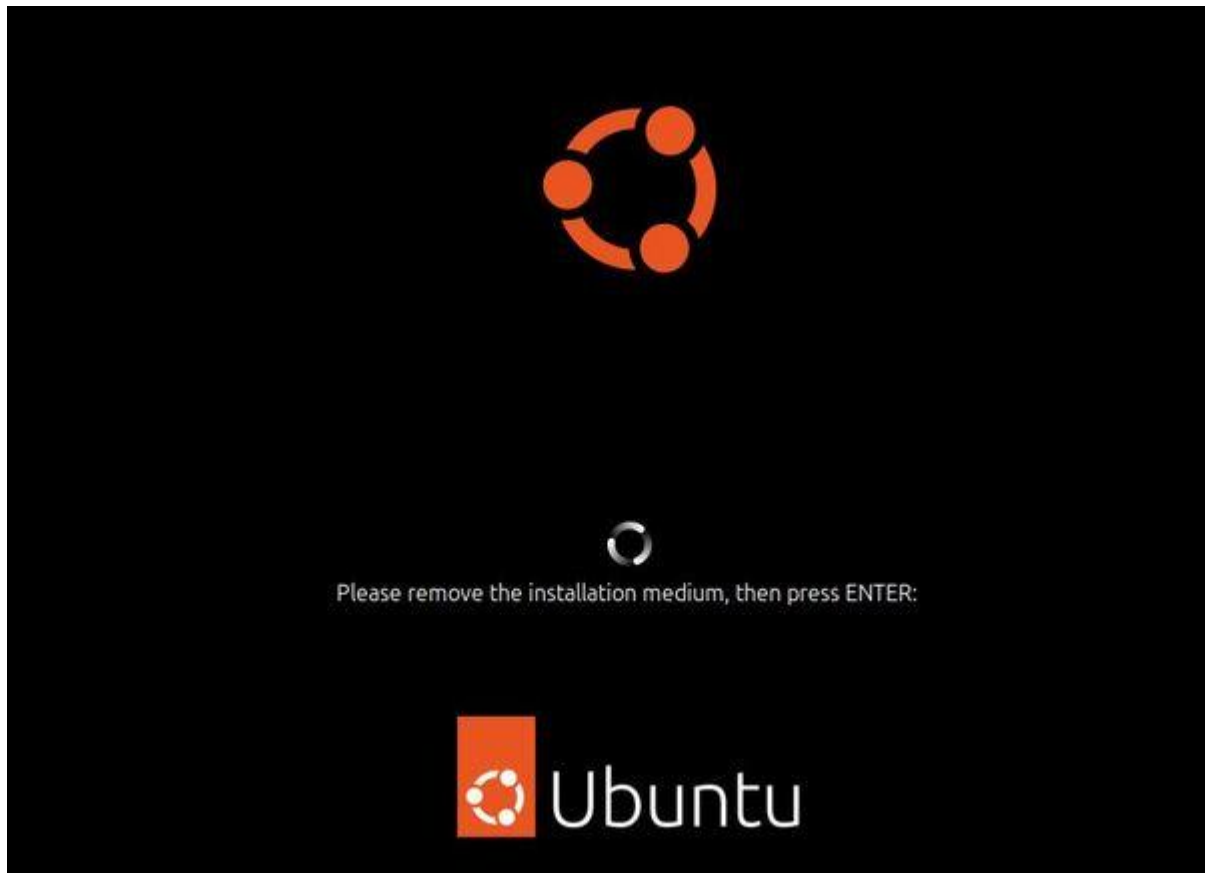

Configure Ubuntu


You will now see a welcome screen.

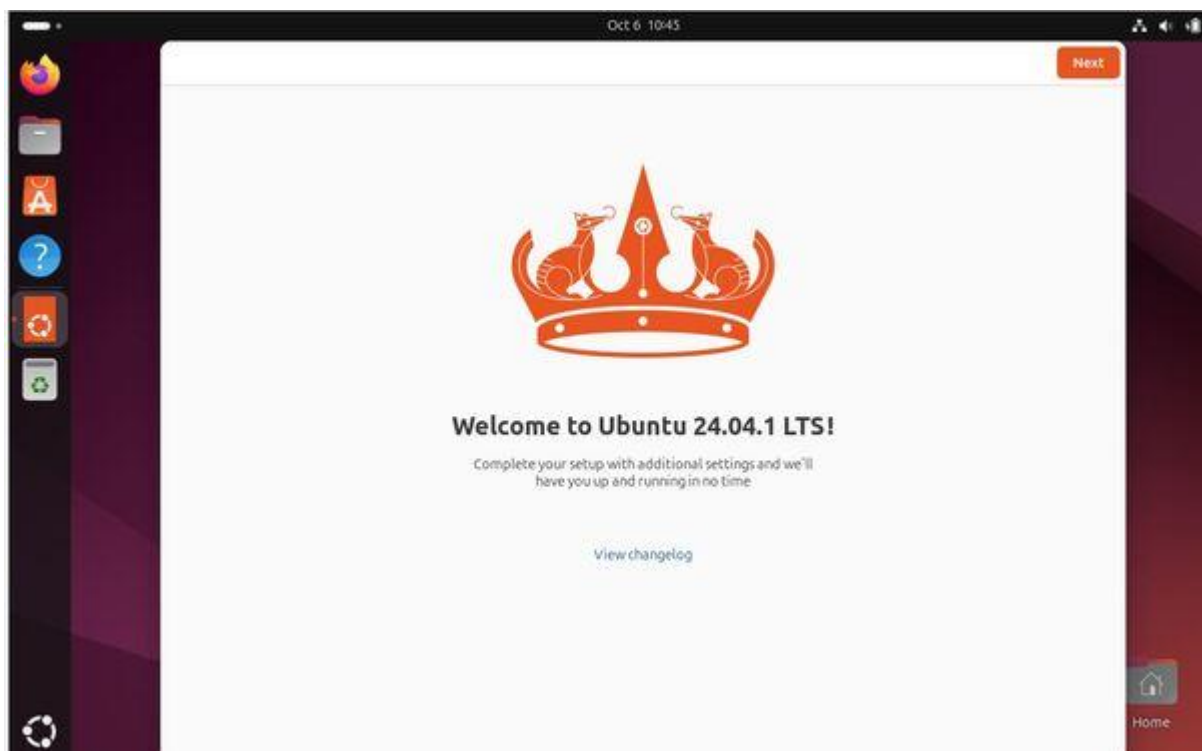

Click Next.

On the “Enable Ubuntu Pro” panel, select “Skip for now”, and **click Next**.

I will select “No, don’t share system data”, and **click Next**.

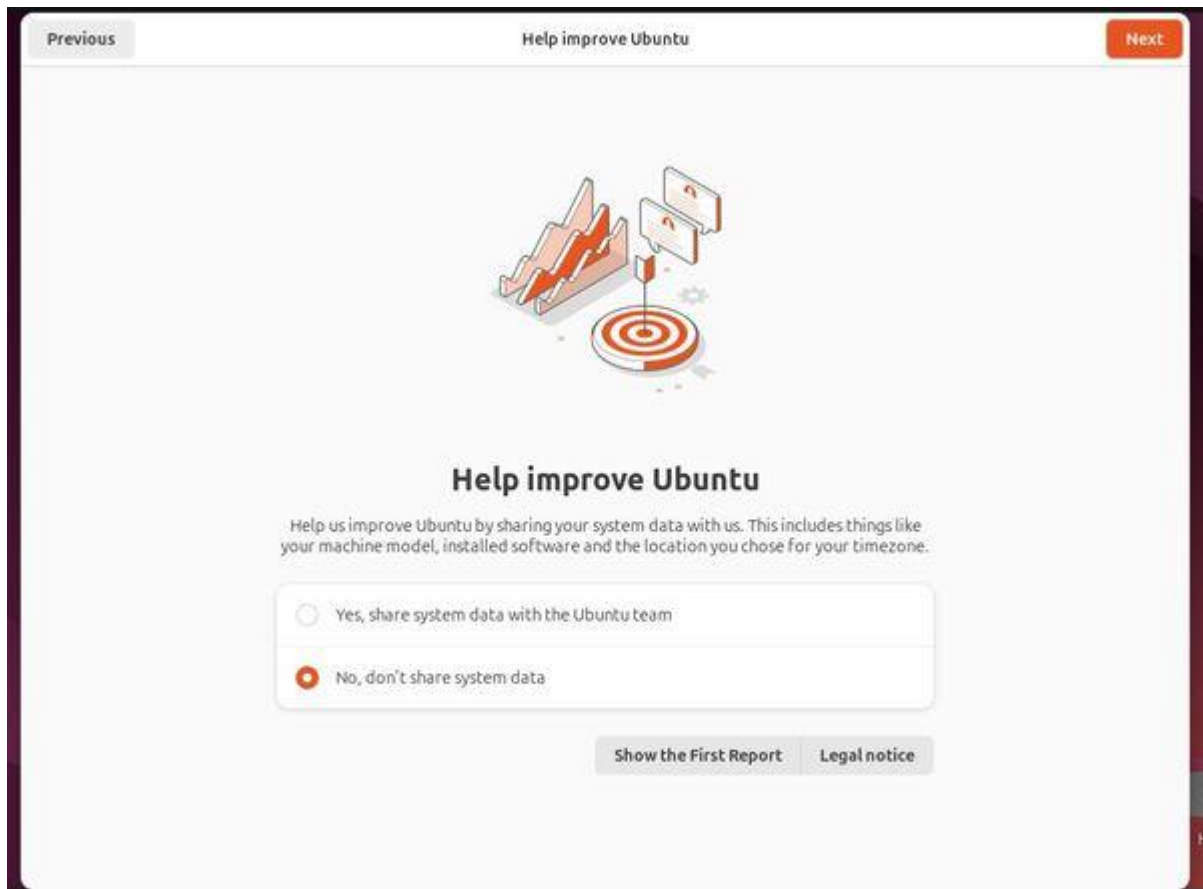

The screenshot shows a dialog box titled "Help improve Ubuntu". At the top, there are three buttons: "Previous" (disabled), "Help improve Ubuntu" (active), and "Next" (highlighted in orange). Below the title bar is an illustration of a 3D bar chart with a red line graph, a target, and a document icon. The main heading is "Help improve Ubuntu". Below it, a paragraph explains: "Help us improve Ubuntu by sharing your system data with us. This includes things like your machine model, installed software and the location you chose for your timezone." There are two radio button options: "Yes, share system data with the Ubuntu team" (unselected) and "No, don't share system data" (selected, with an orange dot). At the bottom, there are two buttons: "Show the First Report" and "Legal notice".

On the “Get started with more applications” panel, **click Finish**.

Install Koha

Open Command prompt and login as root user

```
root@Ubuntu24: /home/vboxuser
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

vboxuser@Ubuntu24:~$ sudo su
[sudo] password for vboxuser:
root@Ubuntu24: /home/vboxuser#
```

01. Update ubuntu

sudo apt-get update

```
root@Ubuntu24: /home/vboxuser# sudo apt-get update
Get:1 http://security.ubuntu.com/ubuntu noble-security InRelease [126 kB]
Hit:2 http://lk.archive.ubuntu.com/ubuntu noble InRelease
Hit:3 http://lk.archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:4 http://lk.archive.ubuntu.com/ubuntu noble-backports InRelease
Get:5 http://security.ubuntu.com/ubuntu noble-security/main amd64 Components [21
.5 kB]
Get:6 http://security.ubuntu.com/ubuntu noble-security/restricted amd64 Componen
ts [212 B]
Get:7 http://security.ubuntu.com/ubuntu noble-security/universe amd64 Components
 [52.2 kB]
Get:8 http://security.ubuntu.com/ubuntu noble-security/multiverse amd64 Componen
ts [212 B]
Fetched 200 kB in 2s (128 kB/s)
Reading package lists... Done
root@Ubuntu24: /home/vboxuser#
```

02. Add koha community repository

echo deb <http://debian.koha-community.org/koha> stable main | sudo tee /etc/apt/sources.list.d/koha.list

Add the key in gpg.asc to your APT trusted keys to avoid warning messages on installation:

wget -O- <http://debian.koha-community.org/koha/gpg.asc> | sudo apt-key add -

```
root@Ubuntu24: /home/vboxuser
N: See apt-secure(8) manpage for repository creation and user configuration details.
root@Ubuntu24:/home/vboxuser# echo deb http://debian.koha-community.org/koha stable main | sudo tee /etc/apt/sources.list.d/koha.list
deb http://debian.koha-community.org/koha stable main
root@Ubuntu24:/home/vboxuser# wget -O- http://debian.koha-community.org/koha/gpg.asc | sudo apt-key add -
--2025-10-24 09:23:16-- http://debian.koha-community.org/koha/gpg.asc
Resolving debian.koha-community.org (debian.koha-community.org)... 67.220.127.145
Connecting to debian.koha-community.org (debian.koha-community.org)|67.220.127.145|:80... Warning: apt-key is deprecated. Manage keyring files in trusted.gpg.d instead (see apt-key(8)).
connected.
HTTP request sent, awaiting response... 200 OK
Length: 59549 (58K) [text/plain]
Saving to: 'STDOUT'

-                  100%[=====] 58.15K 77.4KB/s in 0.8s

2025-10-24 09:23:17 (77.4 KB/s) - written to stdout [59549/59549]

OK
root@Ubuntu24:/home/vboxuser#
```

03. Update the software repository

`sudo apt-get update`

```
root@Ubuntu24:/home/vboxuser# sudo apt-get update
Hit:1 http://security.ubuntu.com/ubuntu noble-security InRelease
Get:2 http://debian.koha-community.org/koha stable InRelease [94.1 kB]
Hit:3 http://lk.archive.ubuntu.com/ubuntu noble InRelease
Hit:4 http://lk.archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:5 http://lk.archive.ubuntu.com/ubuntu noble-backports InRelease
Get:6 http://debian.koha-community.org/koha stable/main amd64 Packages [39.7 kB]
Fetched 134 kB in 3s (47.4 kB/s)
Reading package lists... Done
W: http://debian.koha-community.org/koha/dists/stable/InRelease: Key is stored in legacy trusted.gpg keyring (/etc/apt/trusted.gpg), see the DEPRECATION section in apt-key(8) for details.
root@Ubuntu24:/home/vboxuser#
```

04. Install koha

`sudo apt-get install koha-common`

```
root@Ubuntu24: /home/vboxuser
0 amd64 2.42-4ubuntu2.5 [97.7 kB]
Get:23 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 libctf0 amd64 2.42-4ubuntu2.5 [94.5 kB]
Get:24 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 libgprofng0 amd64 2.42-4ubuntu2.5 [849 kB]
Get:25 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 binutils-x86-64-linux-gnu amd64 2.42-4ubuntu2.5 [2,462 kB]
Get:26 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 binutils amd64 2.42-4ubuntu2.5 [18.1 kB]
Get:27 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 libcc1-0 amd64 14.2.0-4ubuntu2~24.04 [48.0 kB]
Get:28 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 libitm1 amd64 14.2.0-4ubuntu2~24.04 [29.7 kB]
Get:29 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 libasan8 amd64 14.2.0-4ubuntu2~24.04 [3,031 kB]
Get:30 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 liblsan0 amd64 14.2.0-4ubuntu2~24.04 [1,322 kB]
Get:31 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 libtsan2 amd64 14.2.0-4ubuntu2~24.04 [2,772 kB]
Get:32 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 libubsan1 amd64 14.2.0-4ubuntu2~24.04 [1,184 kB]
Get:33 http://lk.archive.ubuntu.com/ubuntu noble-updates/main amd64 libhwasan0 amd64 14.2.0-4ubuntu2~24.04 [1,641 kB]
5% [33 libhwasan0 47.2 kB/1,641 kB 3%] [19 libhttp-oai-3.27-perl 57.1 kB/92.7 k
```

05. Server Configuration

`sudo nano /etc/koha/koha-sites.conf`

```
GNU nano 7.2 /etc/koha/koha-sites.conf
# NOTE: for a complete list of valid options please read koha-create(8)


## Apache virtual hosts creation variables
#
# Please note that the URLs are built like this:
# OPAC: http://<OPACPREFIX><INSTANCE NAME><OPACSUFFIX><DOMAIN>:<OPACPORT>
# STAFF: http://<INTRAPREFIX><INSTANCE NAME><INTRASUFFIX><DOMAIN>:<INTRAPORT>
DOMAIN=".myDNSname.org"
INTRAPORT="80"
INTRAPREFIX=""
INTRASUFFIX="-intra"
OPACPORT="80"
OPACPREFIX=""
OPACSUFFIX=""

## Default data to be loaded
#
# DEFAULTSQL: filename
# Specify an SQL file with default data to load during instance creation
# The SQL file can be optionally compressed with gzip

^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^_ Go To Line
```

Change INTRAPORT is 8080

INTRAPORT="8080"

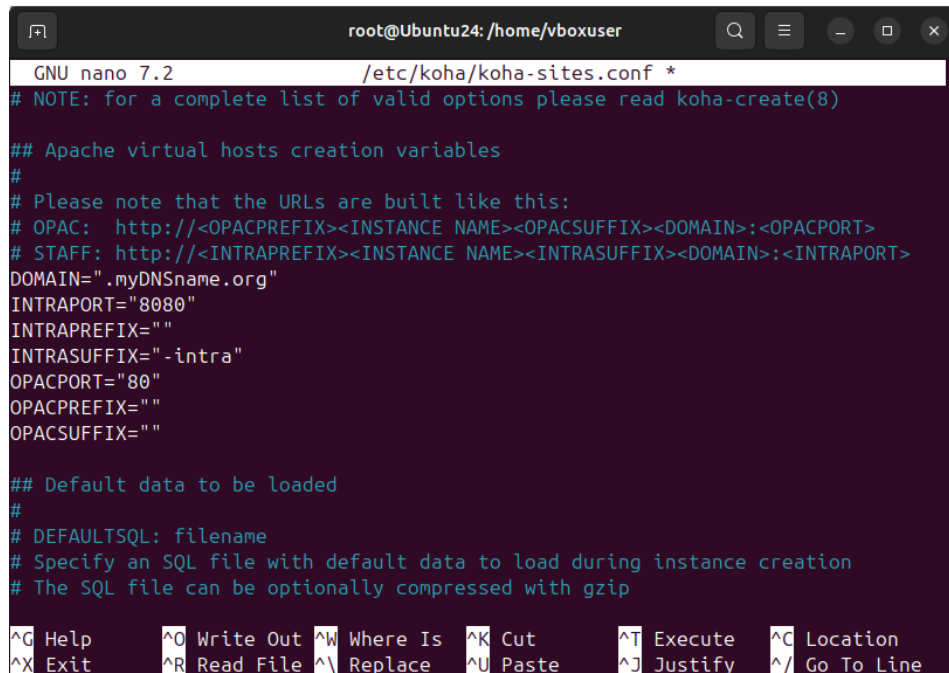

```
root@Ubuntu24: /home/vboxuser
GNU nano 7.2 /etc/koha/koha-sites.conf *
# NOTE: for a complete list of valid options please read koha-create(8)

## Apache virtual hosts creation variables
#
# Please note that the URLs are built like this:
# OPAC: http://<OPACPREFIX><INSTANCE NAME><OPACSUFFIX><DOMAIN>:<OPACPORT>
# STAFF: http://<INTRAPREFIX><INSTANCE NAME><INTRASUFFIX><DOMAIN>:<INTRAPORT>
DOMAIN=".myDNSname.org"
INTRAPORT="8080"
INTRAPREFIX=""
INTRASUFFIX="-intra"
OPACPORT="80"
OPACPREFIX=""
OPACSUFFIX=""

## Default data to be loaded
#
# DEFAULTSQL: filename
# Specifying an SQL file with default data to load during instance creation
# The SQL file can be optionally compressed with gzip


^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location
^X Exit      ^R Read File ^_ Replace   ^U Paste     ^J Justify   ^_ Go To Line
```

To save the window press

CTR+X After that press Shift+Y

06. Install MySQL

sudo apt-get install mysql-server

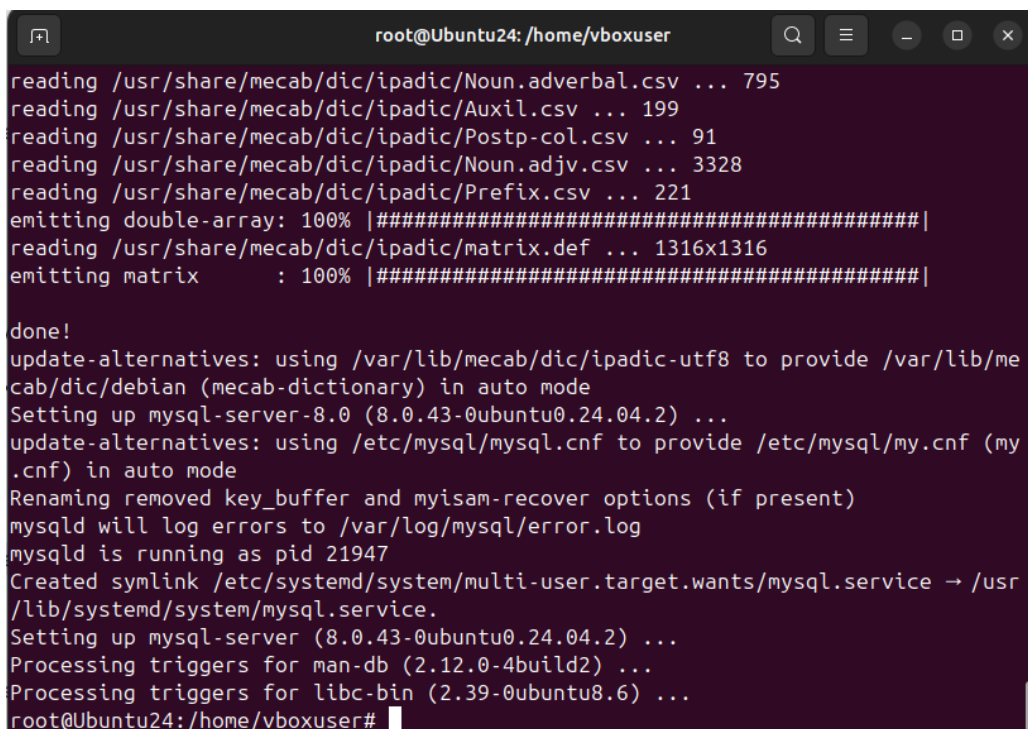

```
root@Ubuntu24: /home/vboxuser
reading /usr/share/mecab/dic/ipadic/Noun.adverbial.csv ... 795
reading /usr/share/mecab/dic/ipadic/Auxil.csv ... 199
reading /usr/share/mecab/dic/ipadic/Postp-col.csv ... 91
reading /usr/share/mecab/dic/ipadic/Noun.adjv.csv ... 3328
reading /usr/share/mecab/dic/ipadic/Prefix.csv ... 221
emitting double-array: 100% |#####|
reading /usr/share/mecab/dic/ipadic/matrix.def ... 1316x1316
emitting matrix      : 100% |#####|

done!
update-alternatives: using /var/lib/mecab/dic/ipadic-utf8 to provide /var/lib/me
cab/dic/debian (mecab-dictionary) in auto mode
Setting up mysql-server-8.0 (8.0.43-0ubuntu0.24.04.2) ...
update-alternatives: using /etc/mysql/mysql.cnf to provide /etc/mysql/my.cnf (my
.cnf) in auto mode
Renaming removed key_buffer and myisam-recover options (if present)
mysqld will log errors to /var/log/mysql/error.log
mysqld is running as pid 21947
Created symlink /etc/systemd/system/multi-user.target.wants/mysql.service → /usr
/lib/systemd/system/mysql.service.
Setting up mysql-server (8.0.43-0ubuntu0.24.04.2) ...
Processing triggers for man-db (2.12.0-4build2) ...
Processing triggers for libc-bin (2.39-0ubuntu8.6) ...
root@Ubuntu24: /home/vboxuser#
```

07. Koha instance creation

Apply following commands to create apache configuration files

`sudo a2enmod rewrite`

```
root@Ubuntu24:/home/vboxuser# sudo a2enmod rewrite
Enabling module rewrite.
To activate the new configuration, you need to run:
    systemctl restart apache2
root@Ubuntu24:/home/vboxuser#
```

`sudo a2enmod cgi`

```
root@Ubuntu24:/home/vboxuser# sudo a2enmod cgi
Enabling module cgi.
To activate the new configuration, you need to run:
    systemctl restart apache2
root@Ubuntu24:/home/vboxuser#
```

08. Restart apache server

`sudo service apache2 restart`

```
root@Ubuntu24:/home/vboxuser# sudo service apache2 restart
root@Ubuntu24:/home/vboxuser#
```


09. Create a koha instance with the name workshop

`sudo koha-create --create-db workshop`

```
root@Ubuntu24:/home/vboxuser# sudo koha-create --create-db workshop
AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using fd17:625c:f037:2:a00:27ff:fe2a:ef2. Set the 'ServerName' directive globally to suppress this message
AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using fd17:625c:f037:2:a00:27ff:fe2a:ef2. Set the 'ServerName' directive globally to suppress this message
AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using fd17:625c:f037:2:a00:27ff:fe2a:ef2. Set the 'ServerName' directive globally to suppress this message
Koha instance is empty, no staff user created.
* Starting Koha worker daemon for workshop (default) [ OK ]
* Starting Koha worker daemon for workshop (long_tasks) [ OK ]
* Starting Koha indexing daemon for workshop [ OK ]
root@Ubuntu24:/home/vboxuser#
```

10. Add new port

`sudo nano /etc/apache2/ports.conf`

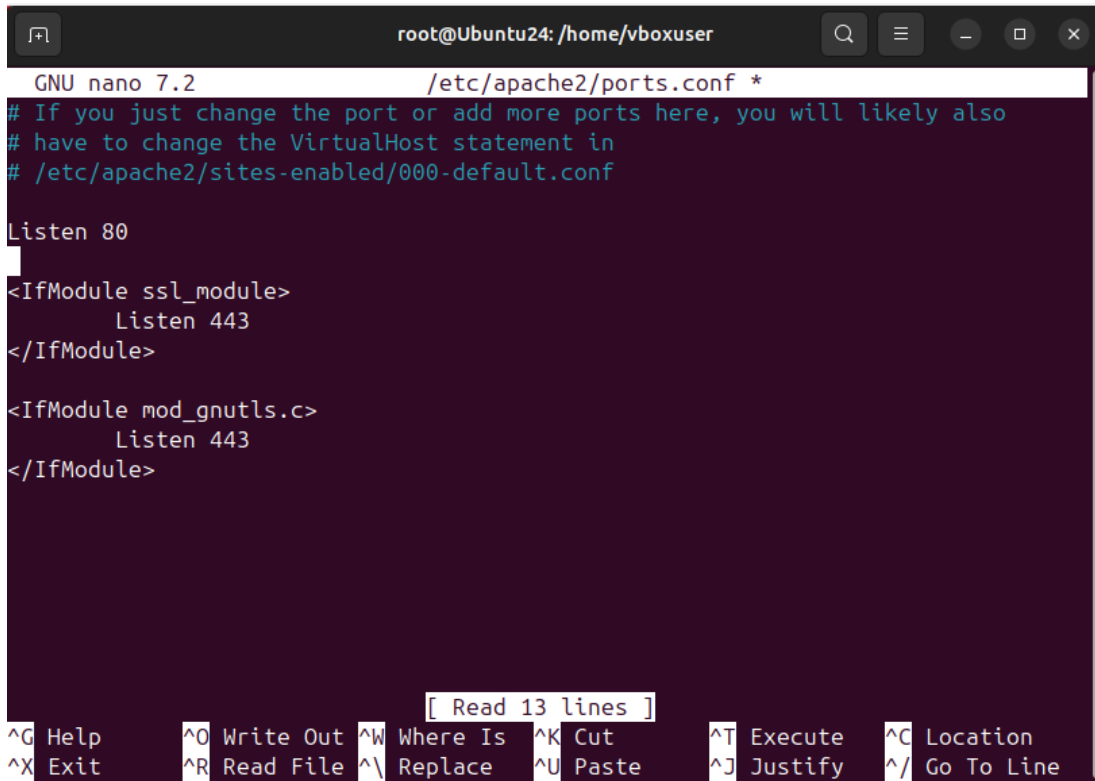A screenshot of a terminal window showing the nano text editor editing the file /etc/apache2/ports.conf. The terminal title is 'root@Ubuntu24: /home/vboxuser'. The editor shows the following content: 'GNU nano 7.2 /etc/apache2/ports.conf *', a comment block about changing ports and VirtualHost statements, 'Listen 80', and two conditional blocks for ssl_module and mod_gnutls.c, each containing 'Listen 443'. The status bar at the bottom indicates '[Read 13 lines]' and lists various keyboard shortcuts like ^G Help, ^O Write Out, etc.

```
GNU nano 7.2 /etc/apache2/ports.conf *
# If you just change the port or add more ports here, you will likely also
# have to change the VirtualHost statement in
# /etc/apache2/sites-enabled/000-default.conf


Listen 80

<IfModule ssl_module>
    Listen 443
</IfModule>

<IfModule mod_gnutls.c>
    Listen 443
</IfModule>
```

Copy paste following line below Listen 80

`Listen 8080`

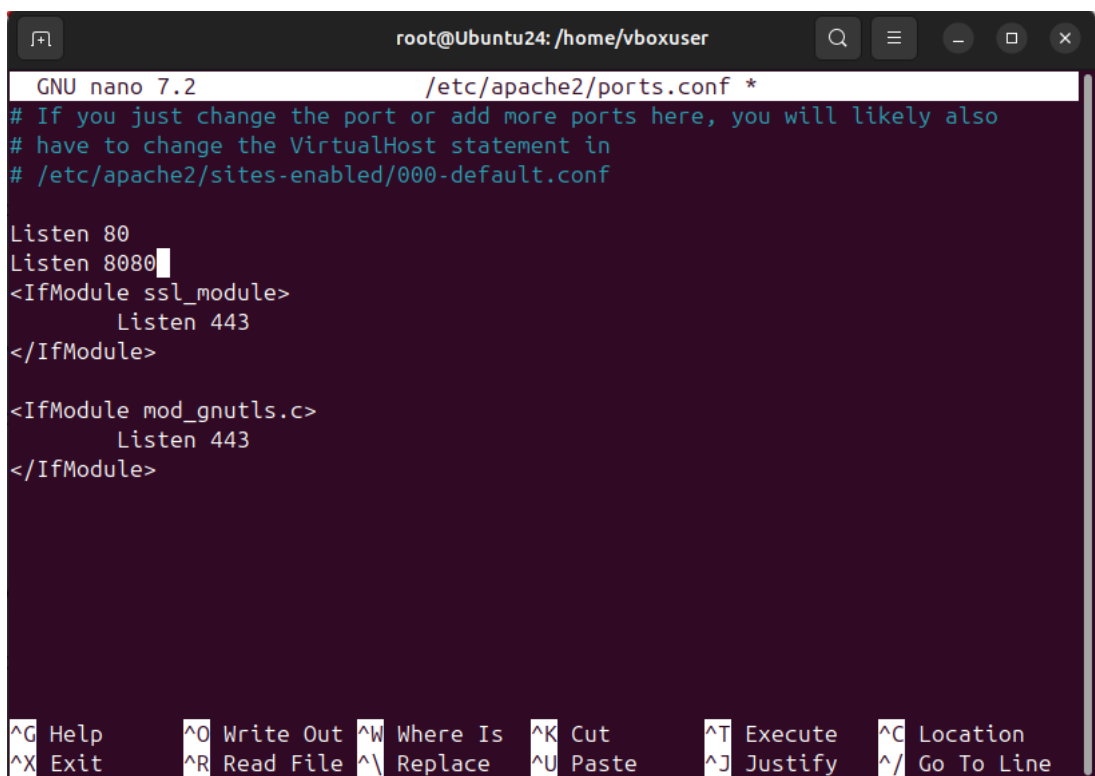A screenshot of the same terminal window and nano editor, now showing the file /etc/apache2/ports.conf with an additional 'Listen 8080' line added below the original 'Listen 80' line. The rest of the file content remains the same. The status bar at the bottom is identical to the previous screenshot.

```
GNU nano 7.2 /etc/apache2/ports.conf *
# If you just change the port or add more ports here, you will likely also
# have to change the VirtualHost statement in
# /etc/apache2/sites-enabled/000-default.conf

Listen 80
Listen 8080
<IfModule ssl_module>
    Listen 443
</IfModule>

<IfModule mod_gnutls.c>
    Listen 443
</IfModule>
```

11. Restart apache server

`sudo service apache2 restart`

```
root@Ubuntu24:/home/vboxuser# sudo service apache2 restart
root@Ubuntu24:/home/vboxuser#
```

12. Enable modules and sites

`sudo a2dissite 000-default`

```
root@Ubuntu24:/home/vboxuser# sudo a2dissite 000-default
Site 000-default disabled.
To activate the new configuration, you need to run:
  systemctl reload apache2
root@Ubuntu24:/home/vboxuser#
```

`sudo a2enmod deflate`

```
root@Ubuntu24:/home/vboxuser# sudo a2enmod deflate
Considering dependency filter for deflate:
Module filter already enabled
Module deflate already enabled
root@Ubuntu24:/home/vboxuser#
```

13. Restart apache server

`sudo service apache2 restart`

```
root@Ubuntu24:/home/vboxuser# sudo service apache2 restart
root@Ubuntu24:/home/vboxuser#
```

14. To generate the koha login password, run this command

`sudo xmlstarlet sel -t -v 'yazgfs/config/pass' /etc/koha/sites/workshop/koha-conf.xml`

```
root@Ubuntu24:/home/vboxuser# sudo xmlstarlet sel -t -v 'yazgfs/config/pass' /et
c/koha/sites/workshop/koha-conf.xml
IETcR~3}gw}X_Qb.root@Ubuntu24:/home/vboxuser#
```


Password is `IETcR~3}gw}X_Qb`.

15. you may check the command at

```
sudo nano /etc/koha/sites/workshop/koha-conf.xml
```

```
<user>koha_workshop</user>
```

```
<pass>IETcR~3}gw}X_Qb.</pass>
```

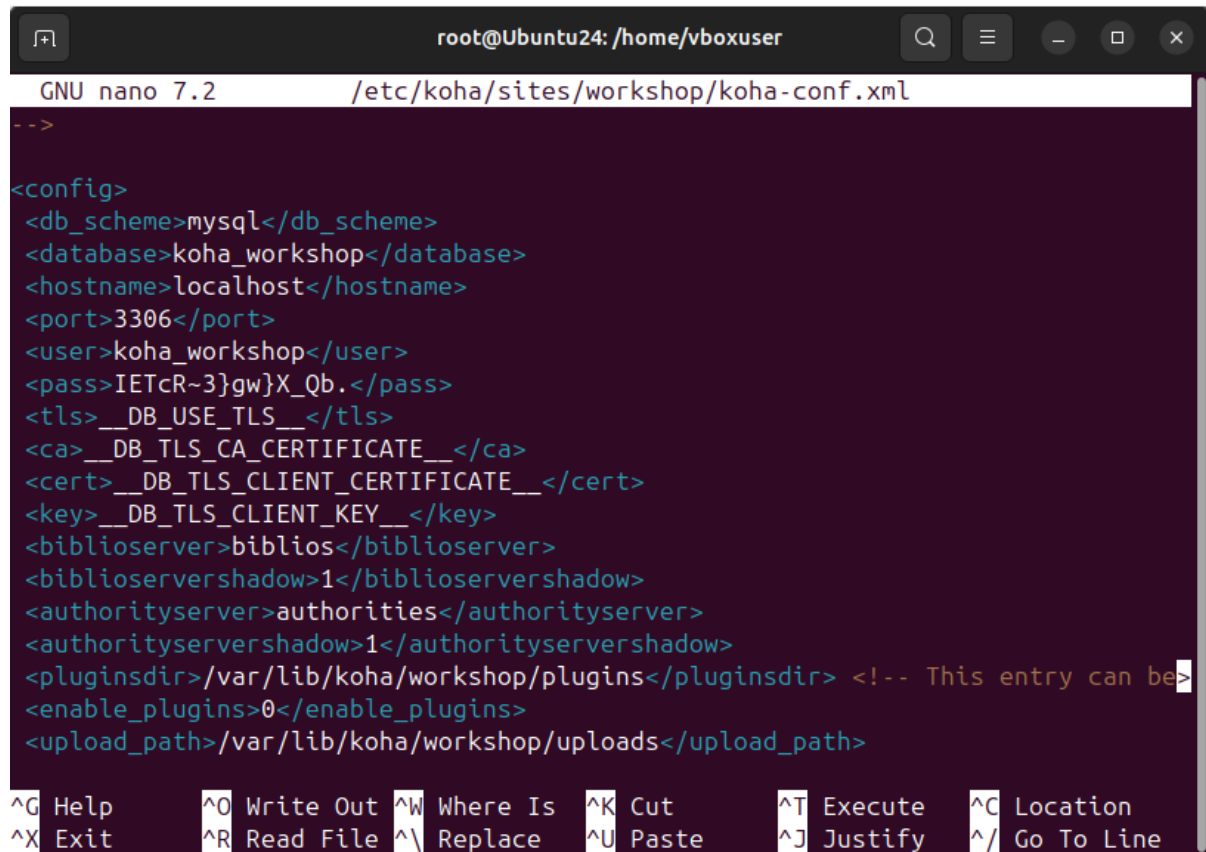


```
root@Ubuntu24: /home/vboxuser
GNU nano 7.2 /etc/koha/sites/workshop/koha-conf.xml
-->
<config>
  <db_scheme>mysql</db_scheme>
  <database>koha_workshop</database>
  <hostname>localhost</hostname>
  <port>3306</port>
  <user>koha_workshop</user>
  <pass>IETcR~3}gw}X_Qb.</pass>
  <tls>__DB_USE_TLS__</tls>
  <ca>__DB_TLS_CA_CERTIFICATE__</ca>
  <cert>__DB_TLS_CLIENT_CERTIFICATE__</cert>
  <key>__DB_TLS_CLIENT_KEY__</key>
  <biblioserver>biblios</biblioserver>
  <biblioservershadow>1</biblioservershadow>
  <authorityserver>authorities</authorityserver>
  <authorityservershadow>1</authorityservershadow>
  <pluginsdir>/var/lib/koha/workshop/plugins</pluginsdir> <!-- This entry can be
  <enable_plugins>0</enable_plugins>
  <upload_path>/var/lib/koha/workshop/uploads</upload_path>

^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^_ Go To Line
```

16. Now go to browser and type <http://localhost:8080>


01. Login to Koha System

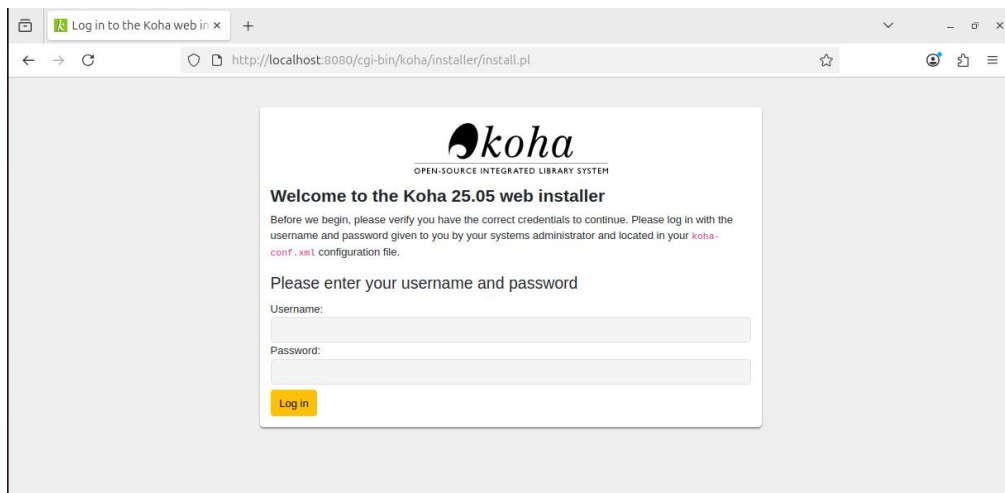

The screenshot shows a web browser window with the address bar displaying `http://localhost:8080/cgi-bin/koha/installer/install.pl`. The page features the Koha logo and the text "Welcome to the Koha 25.05 web installer". Below this, there is a message: "Before we begin, please verify you have the correct credentials to continue. Please log in with the username and password given to you by your systems administrator and located in your `koha-conf.xml` configuration file." A form titled "Please enter your username and password" contains two input fields: "Username:" and "Password:". A yellow "Log in" button is positioned below the password field.


02. Username - koha_workshop
Password - IETcR~3}gw}X_Qb.

Note: Please use your username and password

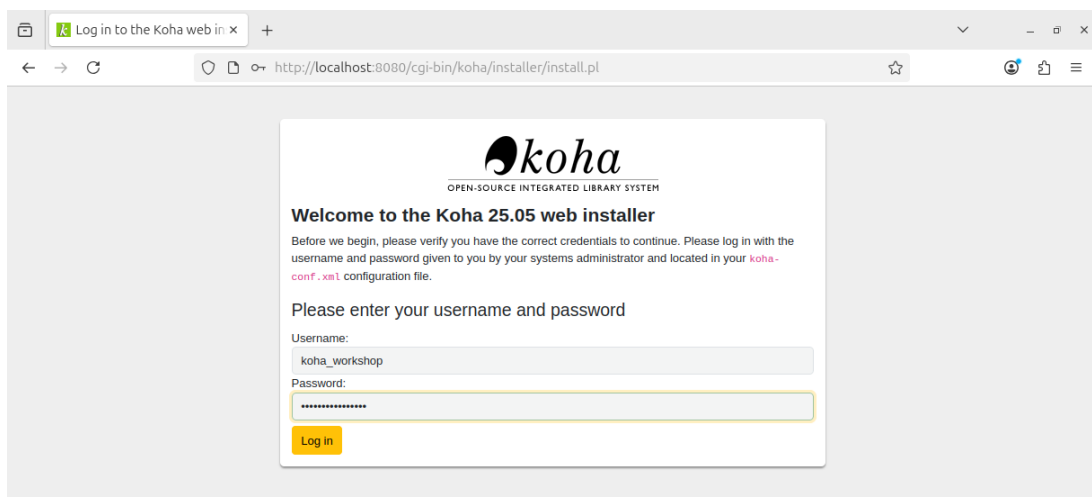


This screenshot shows the same login page as before, but with the credentials entered. The "Username:" field contains "koha_workshop" and the "Password:" field contains a masked password represented by asterisks. The yellow "Log in" button remains visible below the password field.

03. Choosing Language

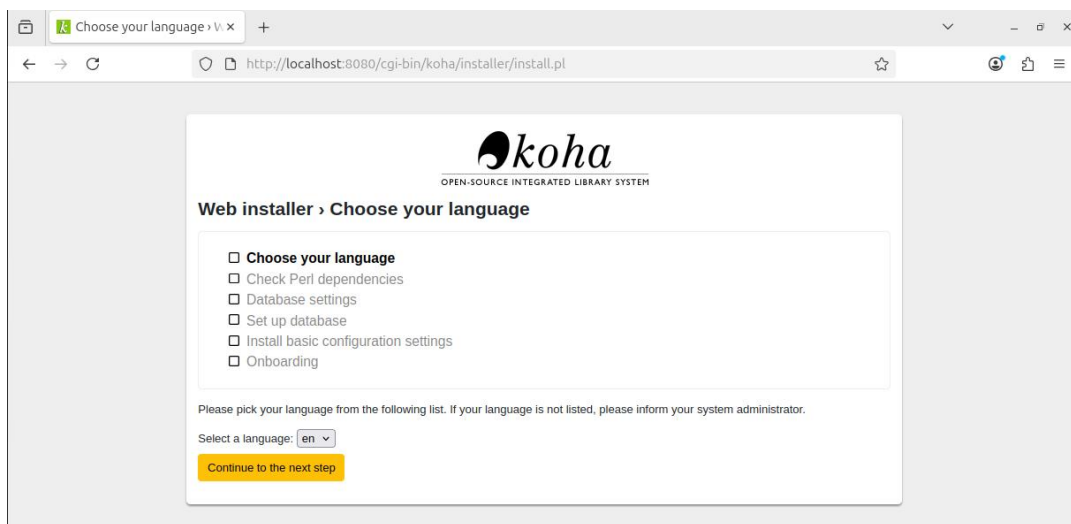


The screenshot shows the "Web installer > Choose your language" page. It features a list of checkboxes for various installation steps: "Choose your language", "Check Perl dependencies", "Database settings", "Set up database", "Install basic configuration settings", and "Onboarding". Below this list, a message states: "Please pick your language from the following list. If your language is not listed, please inform your system administrator." A "Select a language:" dropdown menu is set to "en". A yellow "Continue to the next step" button is located at the bottom of the form.

04. Checking Perl dependencies

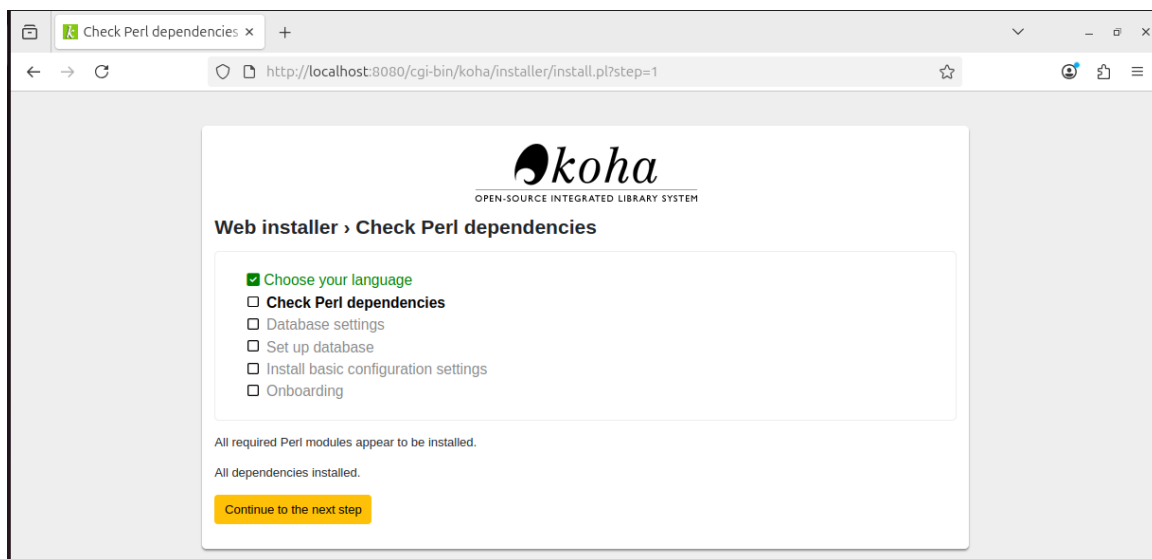

05. Database Setting

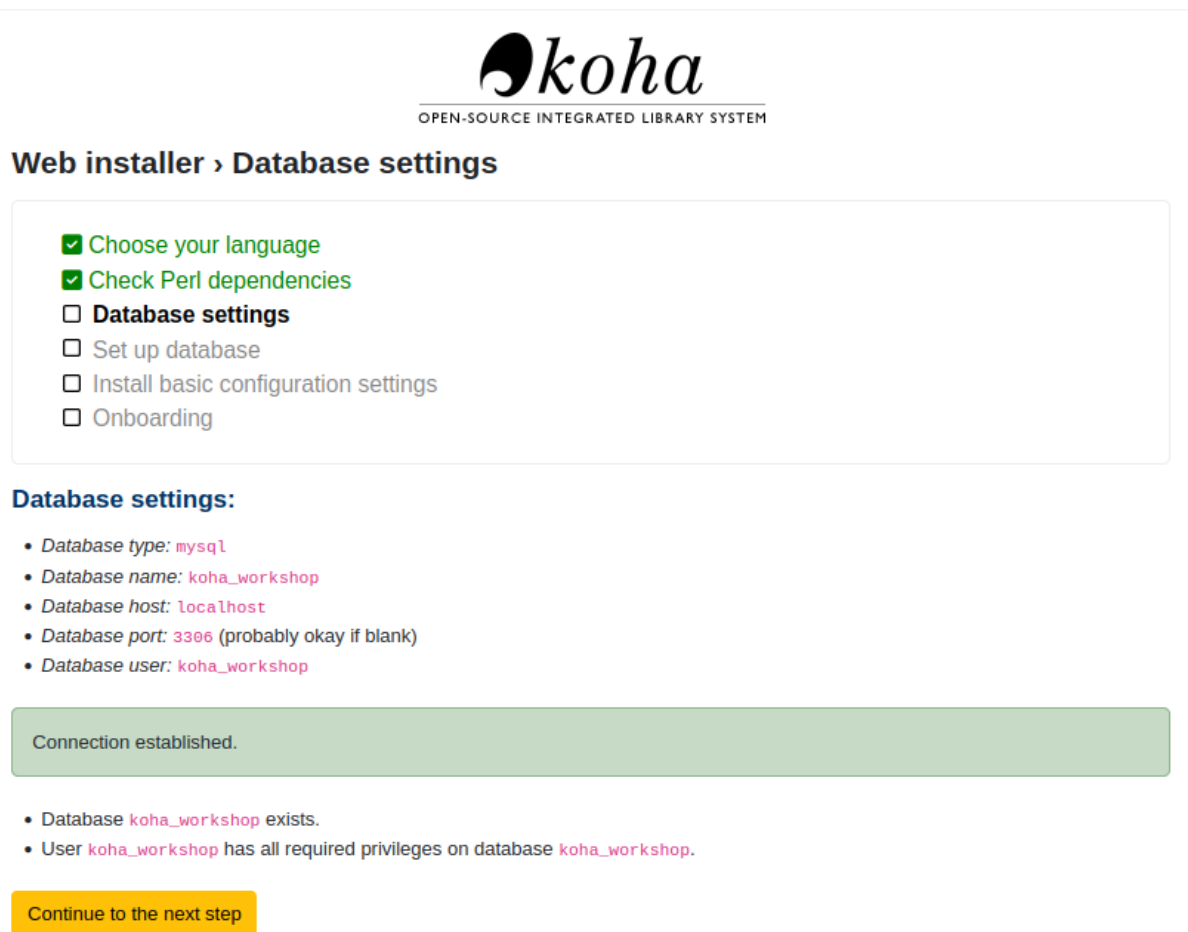

06. Set up Database



OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Web installer › Set up database

- ☒ Choose your language
- ☒ Check Perl dependencies
- ☒ Database settings
- ☐ **Set up database**
- ☐ Install basic configuration settings
- ☐ Onboarding

Now we're ready to create the database tables and fill them with some default data.

Continue to the next step

07. Install Basic Configuration



OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Web installer › Install basic configuration settings

- ☒ Choose your language
- ☒ Check Perl dependencies
- ☒ Database settings
- ☒ Set up database
- ☐ **Install basic configuration settings**
- ☐ Onboarding

We are ready to do some basic configuration.

Continue to the next step

08. Success Message


OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Web installer › Success

Database tables created

- ☒ Choose your language
- ☒ Check Perl dependencies
- ☒ Database settings
- ☒ Set up database
- ☐ Install basic configuration settings
- ☐ Onboarding

Continue to the next step

09. Install Basic Configuration Setting


OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Select your MARC flavor

- ☒ Choose your language
- ☒ Check Perl dependencies
- ☒ Database settings
- ☒ Set up database
- ☐ **Install basic configuration settings**
 - ☐ **Select your MARC flavor**
 - ☐ Selecting default settings
- ☐ Onboarding

MARC stands for Machine Readable Cataloging. A MARC record contains bibliographic record information about an item. MARC21 is used globally, UNIMARC tends to be used in a few European countries.

☐ Unimarc

☒ Marc21

Continue to the next step

- ☒ Choose your language
- ☒ Check Perl dependencies
- ☒ Database settings
- ☒ Set up database
- ☐ Install basic configuration settings
 - ☒ Select your MARC flavor
 - ☐ Selecting default settings
- ☐ Onboarding

MARC frameworks: MARC21

Mandatory

Select none

- ☒ Default MARC21 Standard Authority types:

Personal Name
Corporate Name
Meeting Name
Uniform Title
Chronological Term
Topical Term
Geographic Name
Genre/Form Term
(authorities_normal_marc21)

- ☒ MARC21 Default and Acquisitions bibliographic frameworks.
(marc21_framework_DEFAULT)

Optional

Optional

Select all

- ☒ Selected matching rules for MARC 21 bibliographic records, including:

ISBN
ISSN
(marc21_default_matching_rules)

- ☐ 'FA', a 'Fast Add' minimal MARC21 framework suitable for ILL or on-the-fly cataloguing.
(marc21_sample_fastadd_framework)

- ☐ Simple MARC 21 bibliographic frameworks for some common types of bibliographic material. Frameworks are used to define the structure of your MARC records and the behavior of the integrated MARC editor. You can change these at any time after installation. The frameworks in this optional default setting include:

BKS Books, Booklets, Workbooks
CF CD-ROMs, DVD-ROMs, General Online Resources
SR Audio Cassettes, CDs
VR DVDs, VHS
AR Models
KT Kits
IR Binders
SER Serials
(marc21_simple_bib_frameworks)

Other data

Mandatory

Select none

- ☒ Credit types used in Koha
- ☒ Debit types used in Koha
- ☒ Default Koha system authorised values
- ☒ Default classification sources and filing rules for Koha.
- ☒ ILL batch statuses used in Koha
- ☒ Default Koha system patron restriction types
- ☒ Sample frequencies for subscriptions
- ☒ Sample notices
- ☒ Sample numbering patterns for subscriptions

Optional

Select none

- ☒ Some basic default authorised values for library locations, item lost status, etc.
You can change these at any time after installation.

- ☒ CSV profiles

Default CSV export profiles; including one for exporting serial claims.

- ☒ Coded values conforming to the Z39.71-2006 holdings statements for bibliographic items.
Refer to <https://www.niso.org/publications/standards> for details.

- ☒ MARC code list for relators, as of <http://www.loc.gov/marc/relators/relaterm.html>

- ☒ Some basic currencies with USA dollar as default for ACQ module

- ☒ Useful patron attribute types:

* SHOW_BCODE - Show barcode on the patron summary screen items listings

- ☒ Sample patron types and categories. Types are currently hardcoded but you can manage categories after installation from the administration module.

Adult patron - default patron type

PT - Patron

ST - Student

BH - Homebound

Child - patron with a guarantor

K - Kid

J - Juvenile

YA - Young Adult

Professional - a member of an organization (organization is guarantor)

T - Teacher

S - Staff

B - Board

- ☐ Sample label and patron card data
- ☐ A set of default item types.
- ☐ Sample libraries.
- ☐ Sample holidays: Sunday, Christmas, New Year's (requires sample libraries)
- ☐ Sample news items
- ☐ Sample patrons (requires sample libraries)
- ☒ Sample quotes

☒ Allow access to the following servers to search and download record information:

LIBRARY OF CONGRESS

LIBRARY OF CONGRESS NAMES (authority records)

LIBRARY OF CONGRESS SUBJECTS (authority records)

COLUMBIA UNIVERSITY

NATIONAL LIBRARY OF FRANCE

When you've made your selections, please click 'Import' below to begin the process. It may take a while to complete. Please be patient.

Import

- sample_frequencies.yml
- sample_notices.yml
- sample_numberpatterns.yml
- userflags.sql
- userpermissions.sql
- audio_alerts.sql

Optional data added

- auth_val.yml
- csv_profiles.yml
- marc21_default_matching_rules.yml
- marc21_holdings_coded_values.yml
- marc21_relatorterms.yml
- parameters.yml
- patron_attributes.yml
- patron_categories.yml
- sample_quotes.yml
- sample_z3950_servers.yml

Basic installation complete.

In the next steps you will be guided through some basic requirements like defining Koha user with all administrative privileges (superlibrarian).

You can help the Koha community by sharing your statistics with us.

If you wish to share some of your data, please enable the functionality in the "Share your usage statistics" section of the Administration module.

Set up some of Koha's basic requirements

10. Installation Complete


OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Web installer › Installation complete

- ☒ Choose your language
- ☒ Check Perl dependencies
- ☒ Database settings
- ☒ Set up database
- ☒ Install basic configuration settings
- ☐ Onboarding

Congratulations, installation complete

Begin the onboarding process

11. Creating a Library


OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Web installer › Create a library

- ☒ Installation
- ☐ Onboarding
 - ☐ Create a library
 - ☐ Create a patron category
 - ☐ Create Koha administrator patron
 - ☐ Create a new item type
 - ☐ Create a new circulation rule

Library code: Required

Name: Required

To add another library and for more settings, go to:

Administration › Libraries and groups

Submit

12. Creating Koha administrator Patron



OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Web installer › Create Koha administrator patron

Library created!

- ☒ Installation
- ☐ Onboarding
 - ☒ Create a library
 - ☒ Create a patron category
 - ☐ Create Koha administrator patron
 - ☐ Create a new item type
 - ☐ Create a new circulation rule

Now we will create a patron with superlibrarian permissions. Log in with this to access Koha as a staff member with all permissions.

Administrator identity

Surname: *Required*

First name: *Required*

Card number: *Required*

Library: *Required*

Patron category: *Required*

Administrator account permissions

superlibrarian

Administrator login

Username: *Required*

Password: *Required*

Confirm password: *Required*

To create another patron, go to:

Patrons › New patron

To edit patron permissions, go to:

More › Set permissions

Submit

13. Creating an Item

Web installer > Create a new item type

Administrator account created!

☒ Installation

☐ Onboarding

☒ Create a library

☒ Create a patron category

☒ Create Koha administrator patron

☐ Create a new item type

☐ Create a new circulation rule

Item types are used to group related items. Examples of item types might be books, CDs, or DVDs.

When adding to your institution's catalog you will create an item of a particular item type.

Important: Item types are what you apply circulation rules to. Circulation rules govern how your institution will lend its items: Checkout length, renewal policy, hold policy, etc. For example a circulation rule applied to the DVD item type may enforce a payment of \$1.00 for checking out any DVD.

Item type code:

Required

Description:

Required

To create another item type later and for more settings go to:

Administration > Item types

Submit

14. Creating a Circulation Rule

Web installer › Create a new circulation rule

New item type created!

- ☒ Installation
- ☐ Onboarding
 - ☒ Create a library
 - ☒ Create a patron category
 - ☒ Create Koha administrator patron
 - ☒ Create a new item type
 - ☐ Create a new circulation rule

Library branch: Required

Patron category: Required

Item type: Required

Current checkouts allowed: Required

Loan period: Required

Units: Required

Renewals allowed: Required

Renewals period: Required

Holds allowed: Required

15. Complete Configuration of Koha



OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Web installer › Complete

Circulation rule created!

- ☒ Installation
- ☒ Onboarding

Congratulations you have finished and are ready to use Koha

[Start using Koha](#)

16. Login Koha System with your administrator account.


OPEN-SOURCE INTEGRATED LIBRARY SYSTEM

Error: Session timed out.
Please log in again


Username:

Password:

Library:

Note: Your selection may be overridden if your current IP matches a specified IP for a branch in Koha

Log in

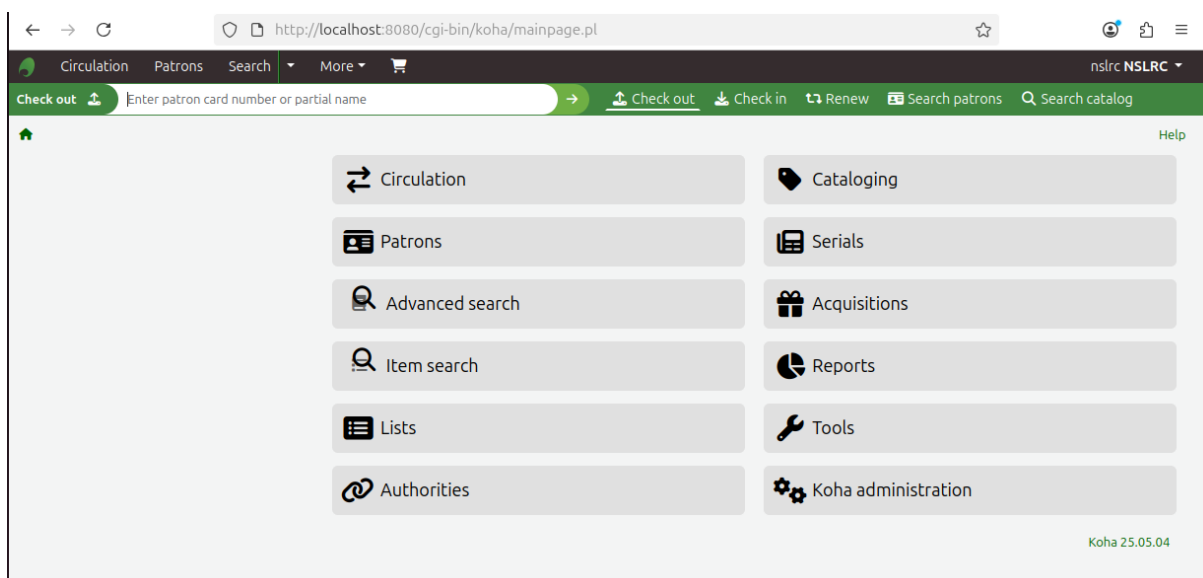

17. View OPAC

Type <http://localhost> in the browser.

