


Deliverable 2


1. What are the server hardware specifications (virtual machine settings)?

This is just an example of a random vm settings

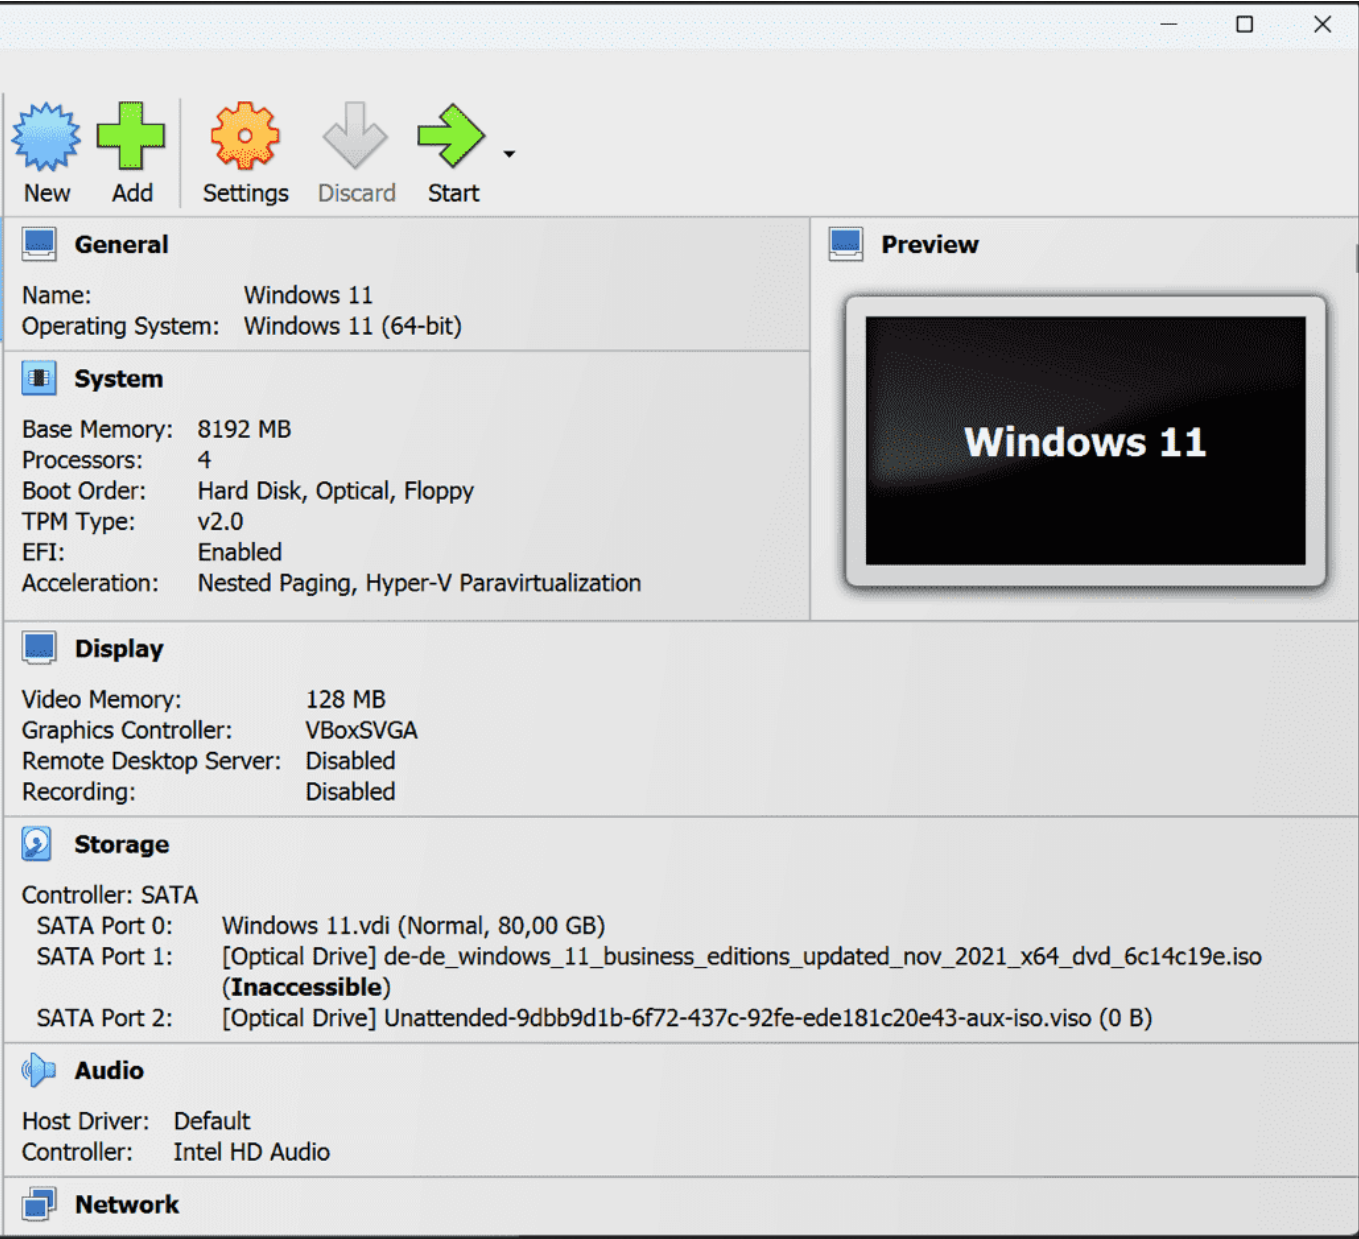

2. What is the Debian Login Screen?

This is just an old example. It should give you an idea of what I am looking for

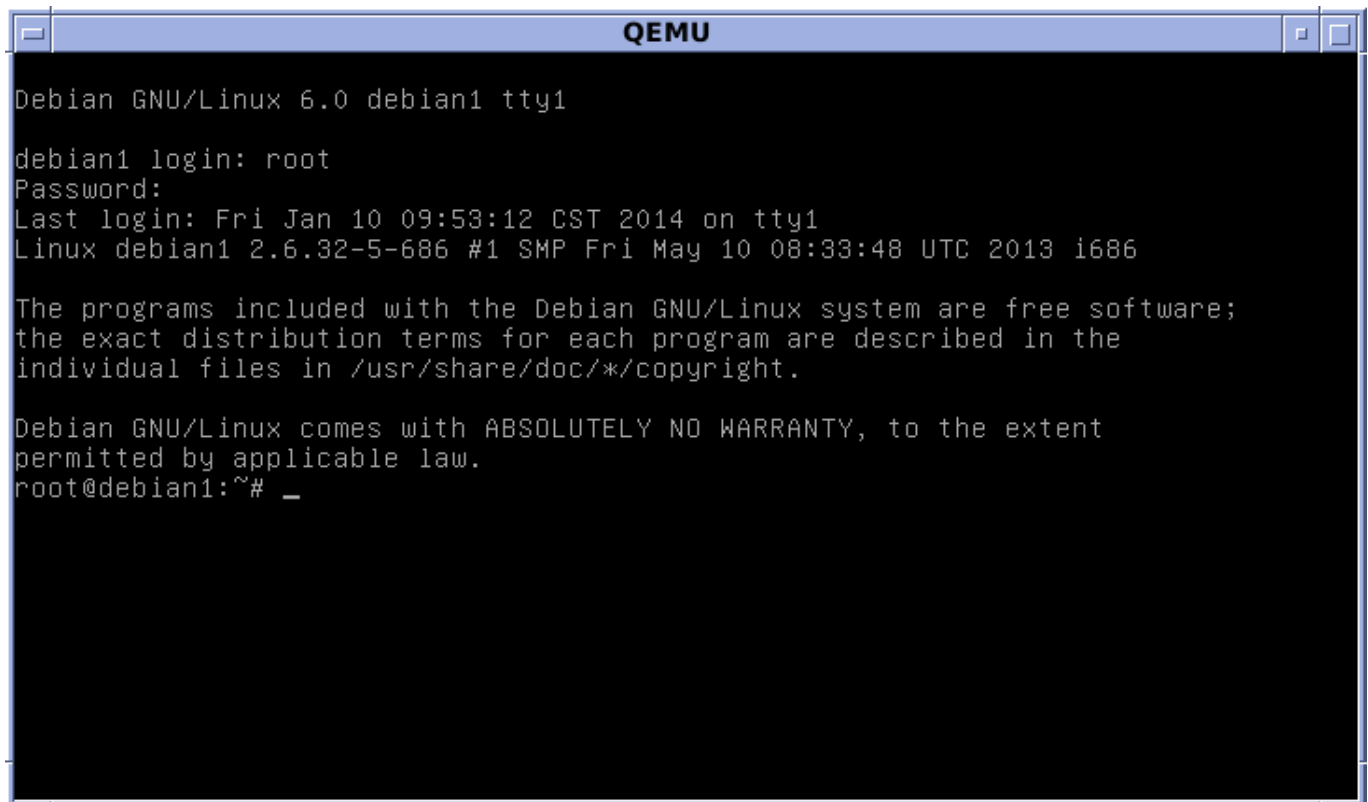

```
QEMU


Debian GNU/Linux 6.0 debian1 tty1

debian1 login: root
Password:
Last login: Fri Jan 10 09:53:12 CST 2014 on tty1
Linux debian1 2.6.32-5-686 #1 SMP Fri May 10 08:33:48 UTC 2013 i686

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
root@debian1:~# _
```

3. What is the IP address of your Debian Server Virtual Machine?

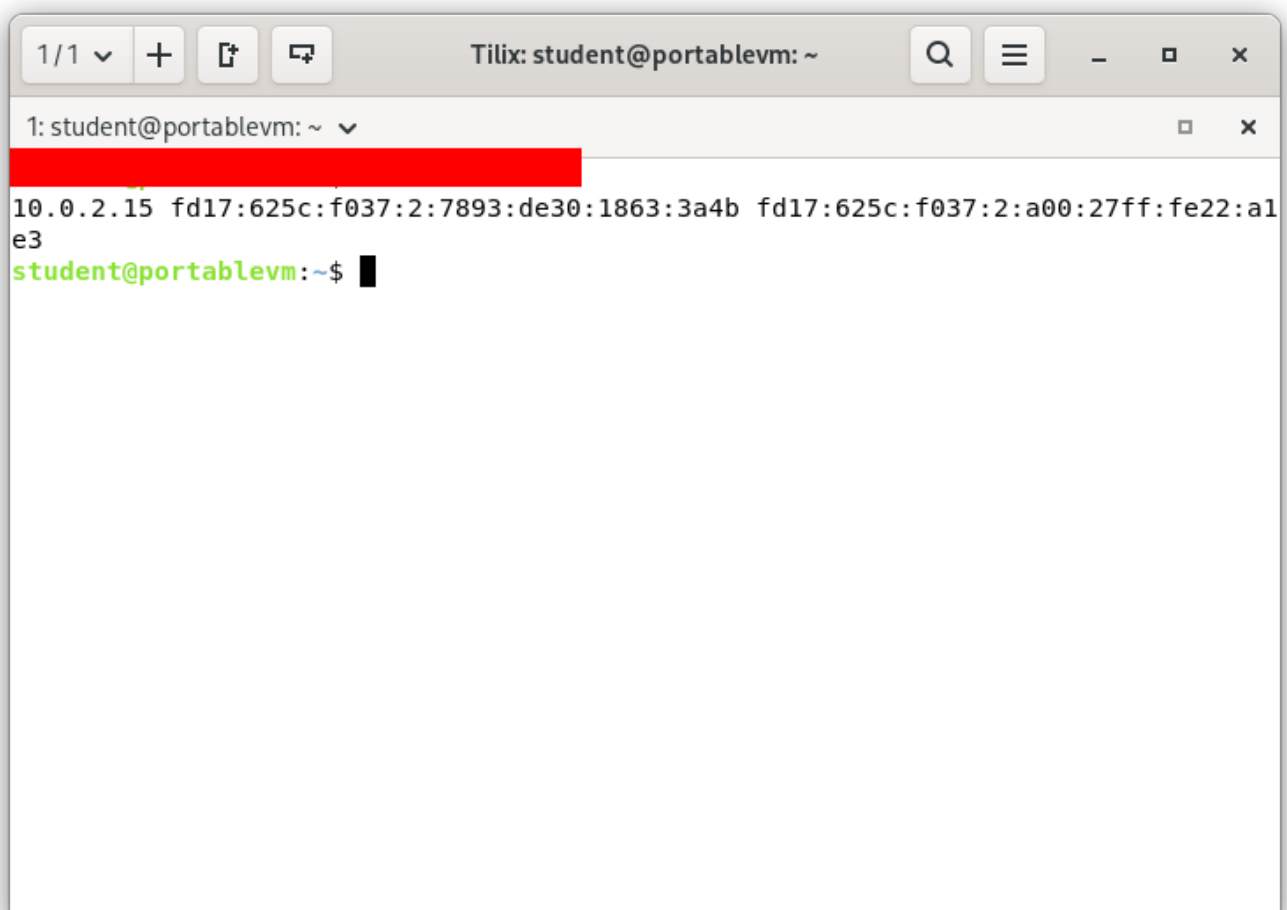

```
Tilix: student@portablevm: ~

1: student@portablevm: ~
10.0.2.15 fd17:625c:f037:2:7893:de30:1863:3a4b fd17:625c:f037:2:a00:27ff:fe22:a1e3
student@portablevm:~$
```

4. How do you work with the Firewall in Debian? (Type and explain what each command does)


Command name

- **Description:** Est pariatur sint fugiat mollit ea est veniam proident nulla laboris excepteur.
- **Formula/Syntax:** `command` + `option` + `argument`
- **Examples:**
 - How do you check if the Firewall is running?
 - By using the command `command here`
 - How do you disable the Firewall?
 - By using the command `command here`
 - How do you add Apache to the Firewall?
 - By using the command `command here`

5. What different commands do we use to work with Apache? (Type the command and include a screenshot!)

1. What is the command you use to check if Apache is running?


- The command is: `command here`

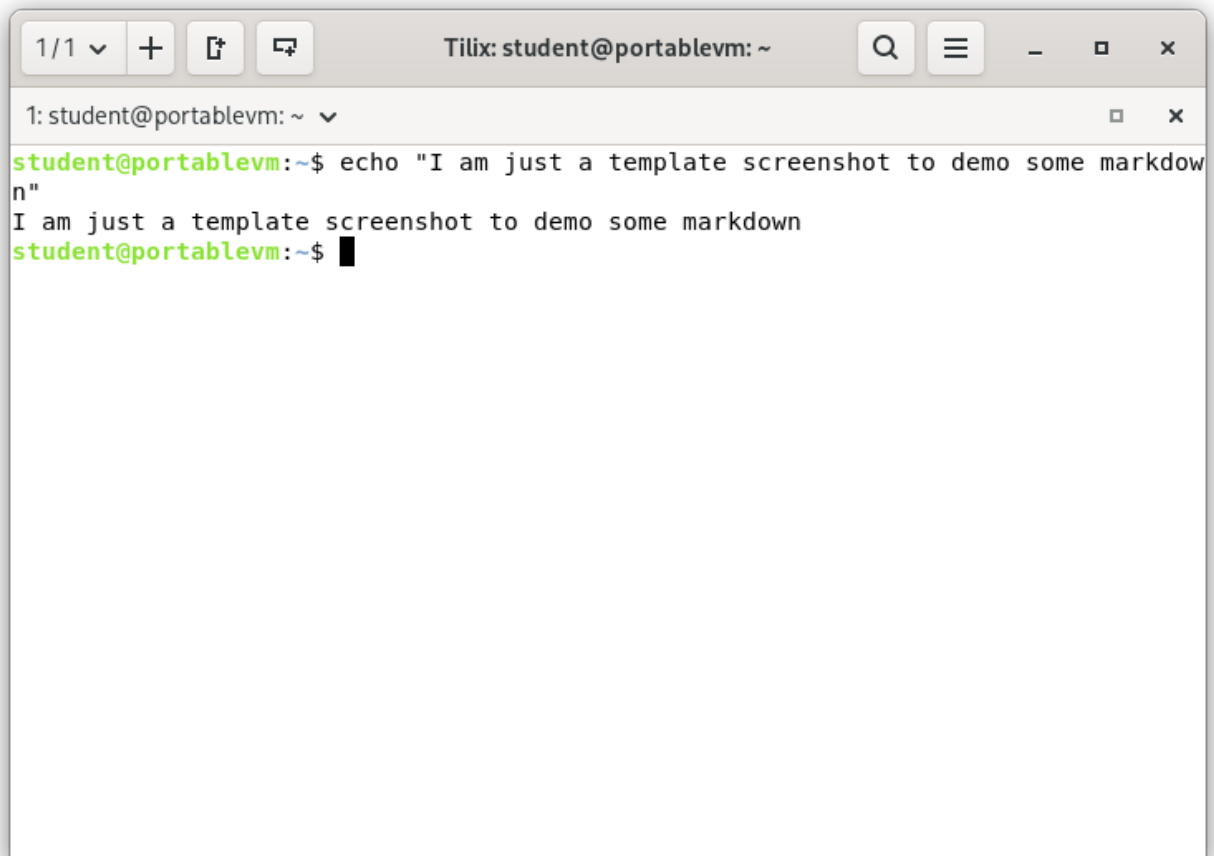A screenshot of a terminal window titled 'Tilix: student@portablevm: ~'. The terminal shows a command prompt 'student@portablevm:~\$' followed by the command 'echo "I am just a template screenshot to demo some markdown"'. The output of the command is displayed on the next line: 'I am just a template screenshot to demo some markdown'. The prompt is followed by a cursor.

```
1/1 + [ ] [ ] Tilix: student@portablevm: ~ [Q] [≡] [-] [□] [x]
1: student@portablevm: ~ [□] [x]
student@portablevm:~$ echo "I am just a template screenshot to demo some markdown"
I am just a template screenshot to demo some markdown
student@portablevm:~$ █
```

2. What is the command you use to stop Apache?


- The command is: `command here`

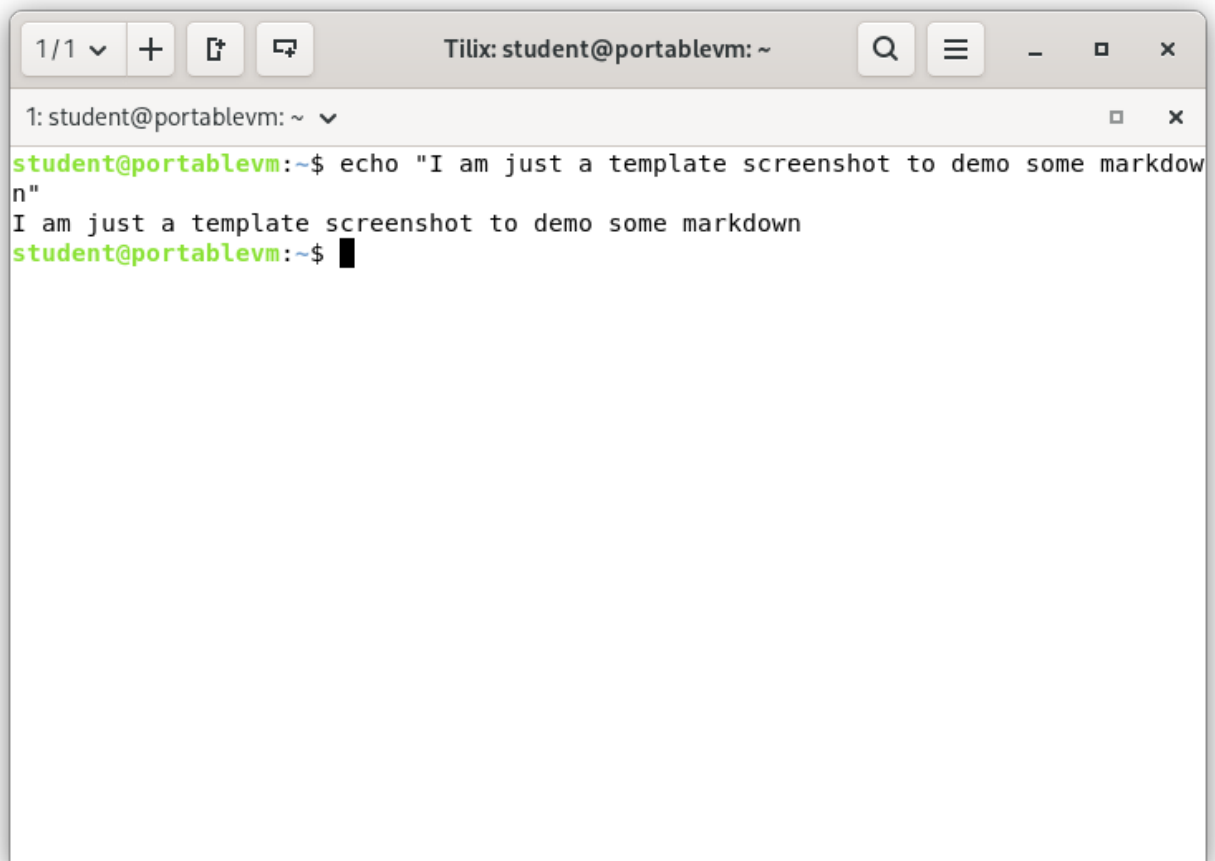A screenshot of a terminal window titled "Tilix: student@portablevm: ~". The terminal shows a command prompt "student@portablevm:~\$" followed by the command "echo \"I am just a template screenshot to demo some markdown\"". The output of the command is "I am just a template screenshot to demo some markdown". The prompt "student@portablevm:~\$" is followed by a cursor.

```
1/1 v + [?] [?] Tilix: student@portablevm: ~ Q ≡ - □ x
1: student@portablevm: ~ v
student@portablevm:~$ echo "I am just a template screenshot to demo some markdown"
I am just a template screenshot to demo some markdown
student@portablevm:~$ █
```

3. What is the command you use to restart Apache?


- The command is: `command here`

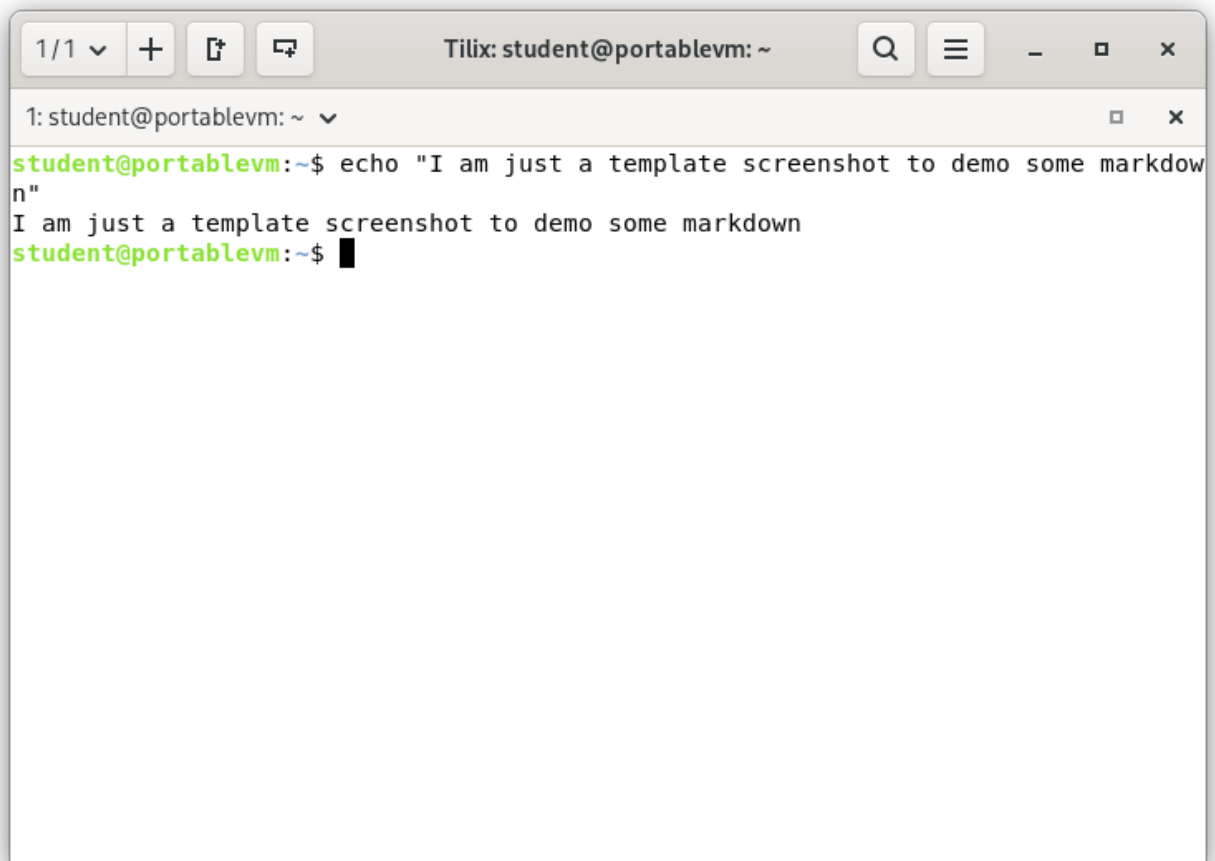A screenshot of a terminal window titled "Tilix: student@portablevm: ~". The terminal shows a command prompt "student@portablevm:~\$" followed by the command "echo \"I am just a template screenshot to demo some markdown\"". The output of the command is "I am just a template screenshot to demo some markdown". The prompt "student@portablevm:~\$" is followed by a cursor.

```
1/1 v + [?] [?] Tilix: student@portablevm: ~ Q ≡ - □ x
1: student@portablevm: ~ v
student@portablevm:~$ echo "I am just a template screenshot to demo some markdown"
I am just a template screenshot to demo some markdown
student@portablevm:~$ █
```

4. What is the command used to test Apache configuration?


- The command is: `command here`

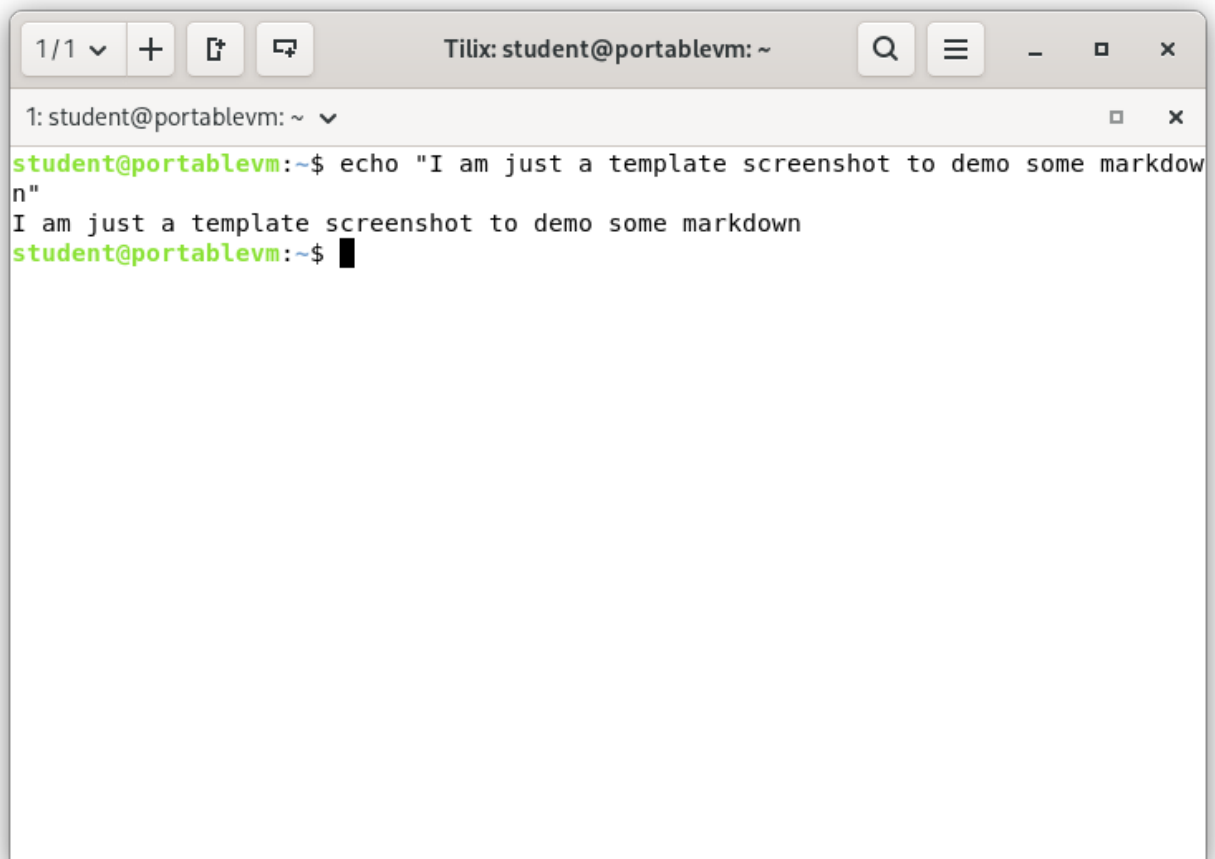A screenshot of a terminal window titled "Tilix: student@portablevm: ~". The terminal shows a command prompt "student@portablevm:~\$" followed by the command "echo \"I am just a template screenshot to demo some markdown\"". The output of the command is "I am just a template screenshot to demo some markdown". The prompt "student@portablevm:~\$" is followed by a cursor.

```
1/1 v + [?] [?] Tilix: student@portablevm: ~ Q ≡ - □ x
1: student@portablevm: ~ v
student@portablevm:~$ echo "I am just a template screenshot to demo some markdown"
I am just a template screenshot to demo some markdown
student@portablevm:~$ █
```

5. What is the command used to check the installed version of Apache?


- The command is: `command here`

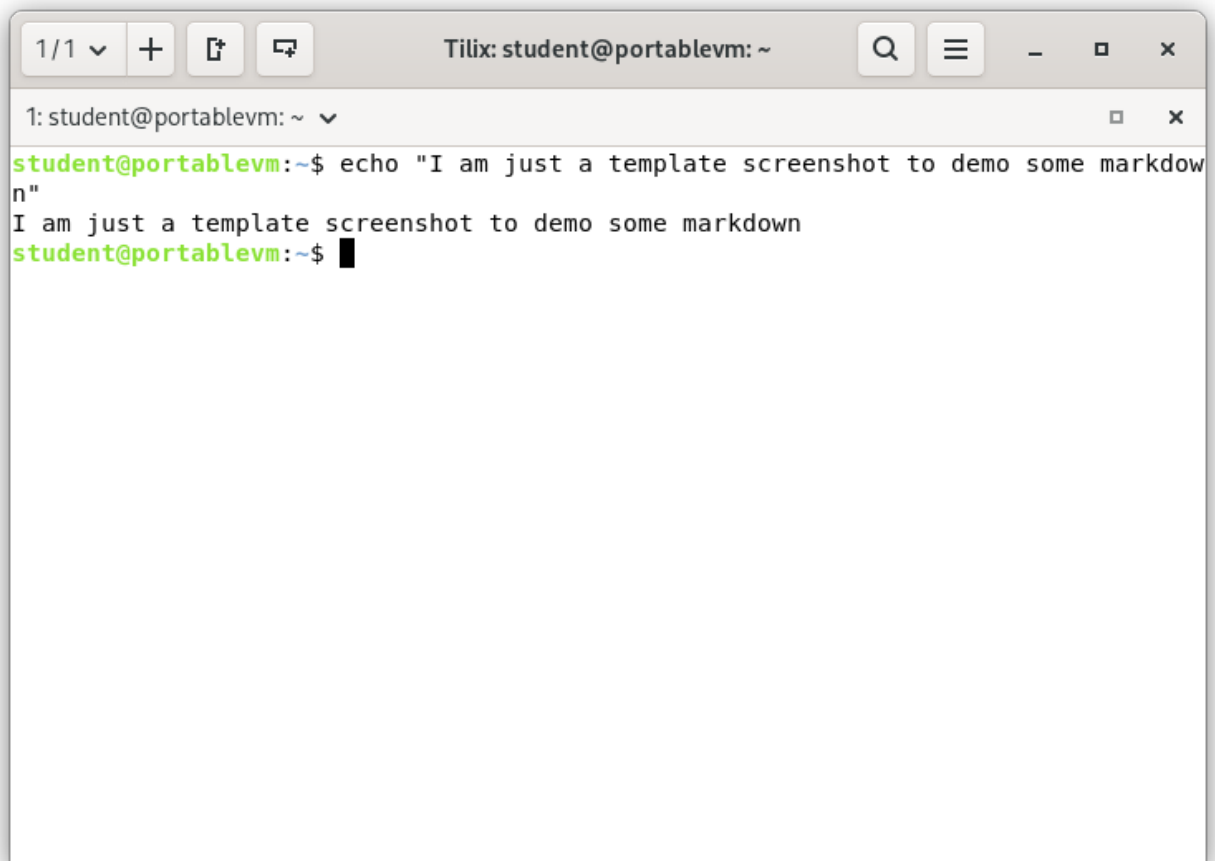A screenshot of a terminal window titled "Tilix: student@portablevm: ~". The terminal shows a command prompt "student@portablevm:~\$" followed by the command "echo \"I am just a template screenshot to demo some markdown\"". The output of the command is "I am just a template screenshot to demo some markdown". The prompt "student@portablevm:~\$" is followed by a cursor. The terminal window has a standard Linux-style title bar with search, menu, and window control icons.

```
1/1 v + [?] [?] Tilix: student@portablevm: ~ Q ≡ - □ x
1: student@portablevm: ~ v
student@portablevm:~$ echo "I am just a template screenshot to demo some markdown"
I am just a template screenshot to demo some markdown
student@portablevm:~$ █
```

6. What are some common configuration files for Apache?

- The command is: `command here`

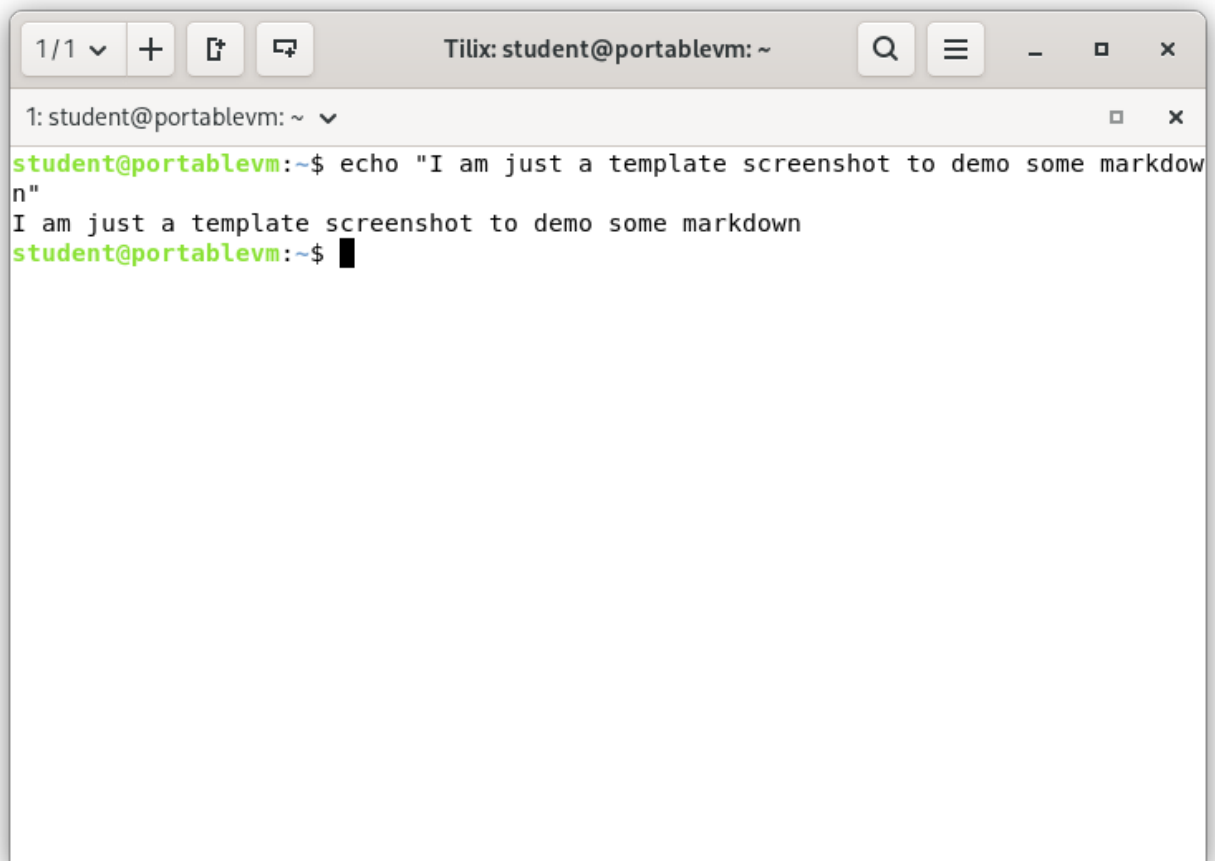


A screenshot of a terminal window titled "Tilix: student@portablevm: ~". The terminal shows a command prompt where the user has entered the command `echo "I am just a template screenshot to demo some markdown"`. The output of the command is displayed on the next line: `I am just a template screenshot to demo some markdown`. The prompt is now ready for the next command.

```
1/1 v + [?] [?] Tilix: student@portablevm: ~ Q ≡ - □ x
1: student@portablevm: ~ v
student@portablevm:~$ echo "I am just a template screenshot to demo some markdown"
I am just a template screenshot to demo some markdown
student@portablevm:~$ █
```

7. Where does Apache store logs?

- The command is: `command here`

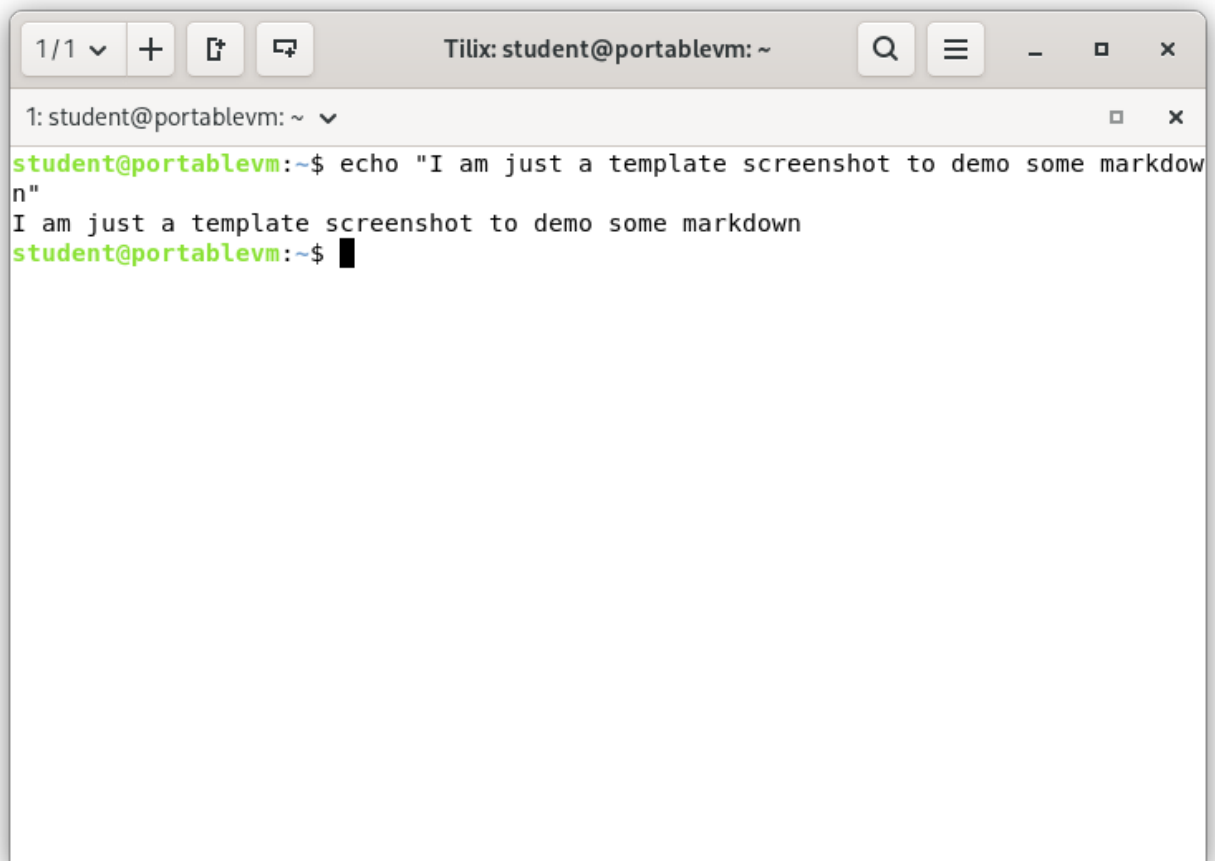


A screenshot of a terminal window titled "Tilix: student@portablevm: ~". The window shows a command prompt where the user has entered the command `echo "I am just a template screenshot to demo some markdown"`. The output of the command is displayed on the next line: `I am just a template screenshot to demo some markdown`. The prompt is now ready for the next command.

```
1/1 v + [?] [?] Tilix: student@portablevm: ~ Q ≡ - □ x
1: student@portablevm: ~ v
student@portablevm:~$ echo "I am just a template screenshot to demo some markdown"
I am just a template screenshot to demo some markdown
student@portablevm:~$ █
```

8. What are some basic commands we can use to review logs?

- The command is: `command here`

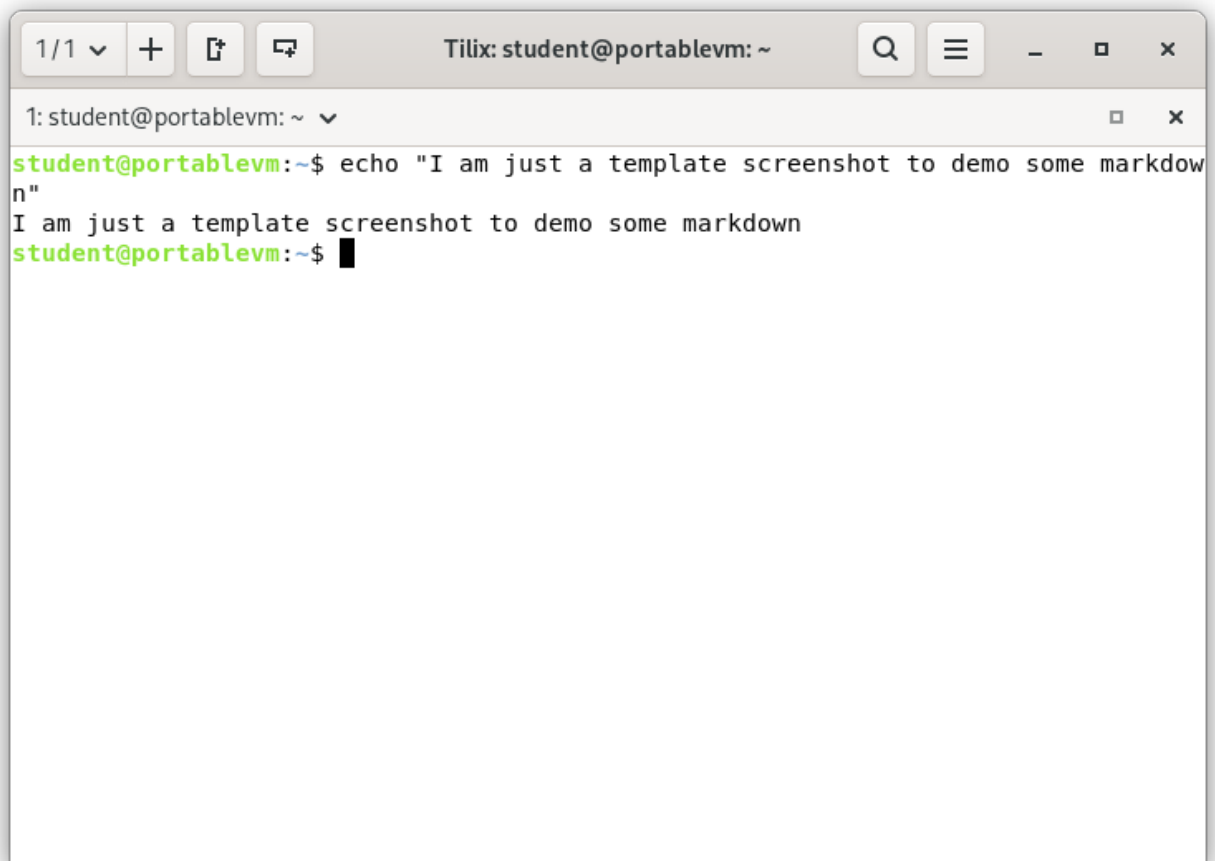

A screenshot of a terminal window titled "Tilix: student@portablevm: ~". The window shows a command prompt where the user has entered the command `echo "I am just a template screenshot to demo some markdown"`. The output of the command is displayed on the next line: `I am just a template screenshot to demo some markdown`. The prompt is now ready for the next command.

```
1/1 v + [ ] [ ] Tilix: student@portablevm: ~ Q ≡ - □ x
1: student@portablevm: ~ v
student@portablevm:~$ echo "I am just a template screenshot to demo some markdown"
I am just a template screenshot to demo some markdown
student@portablevm:~$ █
```