Workbook, Sheets, Variables, and Analysis Mapping

Complete guide to every sheet, variable, formula surface, and analysis handoff.

Generated package: final free-model Spider2-Lite SQLite error-propagation study repo

Repository root: ProgLang_ErrorPropagation

1. Workbook purpose

The workbook is the **human-readable experiment notebook** for the repository. Machine truth still lives in JSONL logs, but the workbook is where planning, turn review, run roll-ups, and dashboard-level interpretation happen. This package completes all previously placeholder-heavy sheets so that every tab now has a clear function.

> The earlier overcount issue came from formula-filled rows being treated like real runs. The repaired workbook now seeds only active planned runs, clears stale working rows when reseeded, and uses simpler dashboard formulas so planned runs and logged runs are counted correctly.

2. Sheet-by-sheet role map

Sheet	Role	How it is maintained
START HERE	Operating order and study setup	Static guidance
Data Entry Guide	Manual vs script-filled expectations	Static guidance
Setup Checklist	Pre-run readiness checks	Static guidance
Lookups	State severities, protocol meanings, model roster	Seeded
Prompt Library	Tracked prompt texts and required variables	Seeded
Tasks	Approved study task manifest	Seeded
Run Plan	One row per planned trajectory	Seeded + synced

Sheet	Role	How it is maintained
Turn Log	One row per executed turn	Synced
Run Summary	One row per run, formula roll-up	Formula-driven
Stability Checks	Re-execution / reprompt evidence	Synced
Metrics Dictionary	Definitions of workbook metrics	Completed static sheet
Example Run	Worked example of one trajectory	Completed static sheet
Dashboard	Compact status indicators	Formula-driven

3. Key screenshots

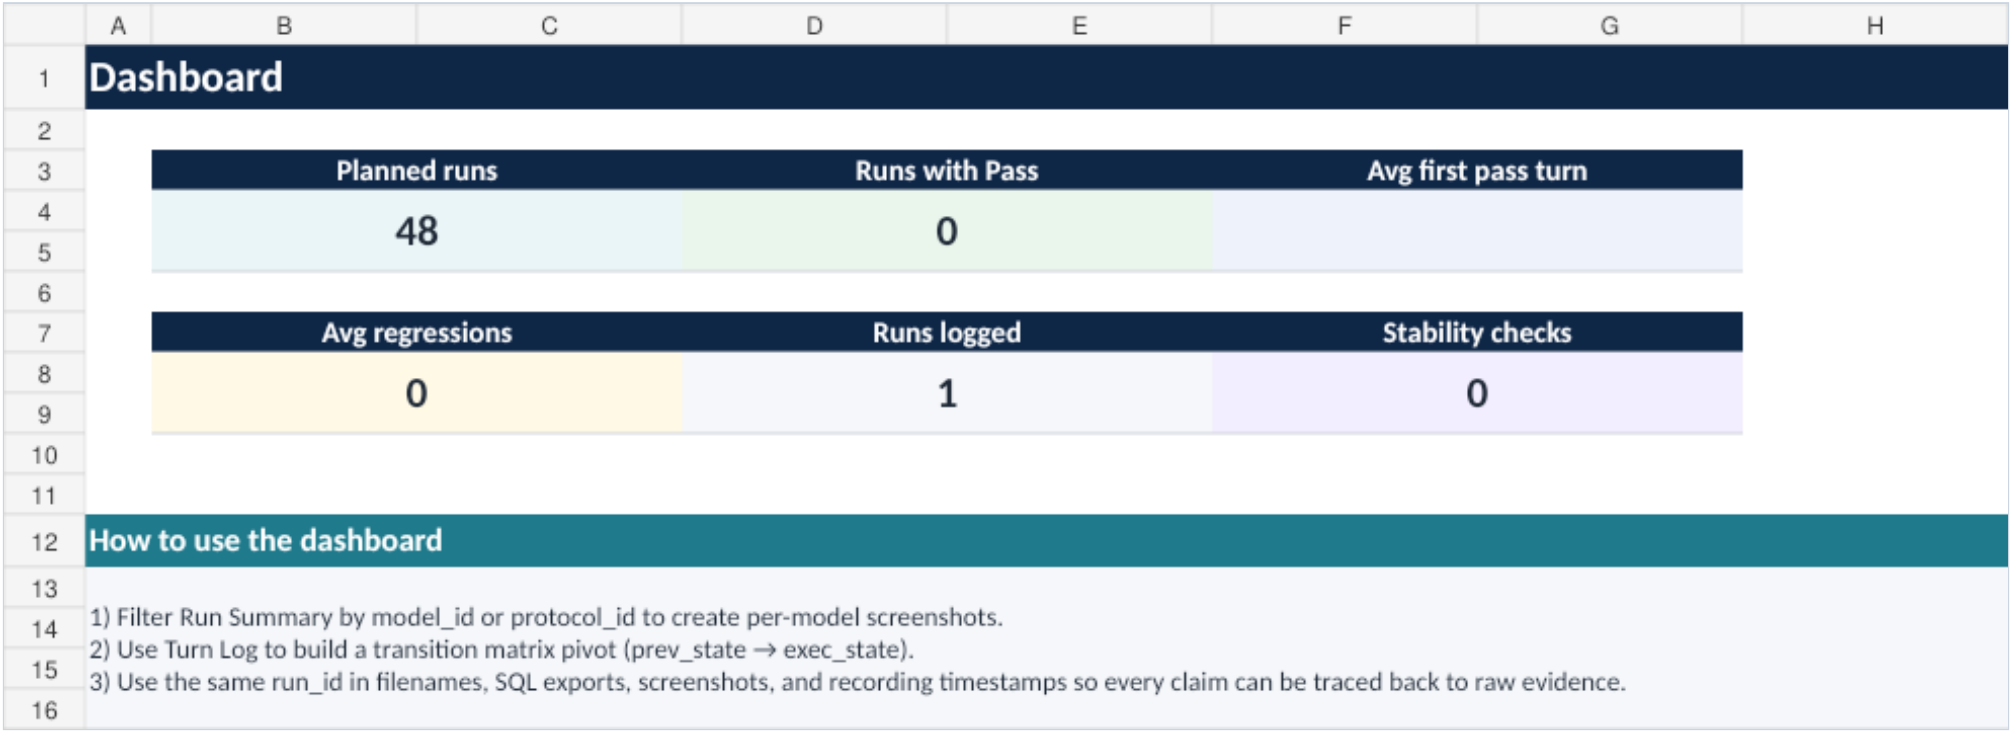

Dashboard

Planned runs	Runs with Pass	Avg first pass turn
48	0	

Avg regressions	Runs logged	Stability checks
0	1	0

How to use the dashboard

1) Filter Run Summary by model_id or protocol_id to create per-model screenshots.
2) Use Turn Log to build a transition matrix pivot (prev_state → exec_state).
3) Use the same run_id in filenames, SQL exports, screenshots, and recording timestamps so every claim can be traced back to raw evidence.

Dashboard after repair and reseeding.

Run Plan

One row = one trajectory you plan to execute. Create the run_id before you record anything so your files, screenshots, and log rows all point back to the same ID.

run_id	batch_id	task_id	db_name	model_id	model_snapshot	protocol_id	temperature	reasoning_mode	T_max	replicate	operator	planned_date	record_file	artifact_folder	commit_hash	status	notes
LOCAL002-CHATGPT-FREE-GPT-5-R1	PILOT-F1	local002	E_commerce	chatgpt-free-gpt-5.3	GPT-5.3	F1	0	manual-browser	4	1				runs/LOCAL002-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from pilot-f1 pack
LOCAL002-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	PILOT-F1	local002	E_commerce	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F1	0	manual-browser	4	1				runs/LOCAL002-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from pilot-f1 pack
LOCAL002-DEEPSEEK-V3-2-W	PILOT-F1	local002	E_commerce	deepseek-v3.2-web	DeepSeek-V3.2	F1		0 manual-browser	4	1				runs/LOCAL002-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from pilot-f1 pack
LOCAL002-CLAUDE-SONNET-4-6-FREE-F2-R1	PILOT-F1	local002	E_commerce	claude-sonnet-4.6-free	Claude Sonnet 4.6	F1	0	manual-browser	4	1				runs/LOCAL002-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from pilot-f1 pack
LOCAL003-CHATGPT-FREE-GPT-5-R1	PILOT-F1	local003	E_commerce	chatgpt-free-gpt-5.3	GPT-5.3	F1	0	manual-browser	4	1				runs/LOCAL003-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from pilot-f1 pack
LOCAL003-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	PILOT-F1	local003	E_commerce	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F1	0	manual-browser	4	1				runs/LOCAL003-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from pilot-f1 pack
LOCAL003-DEEPSEEK-V3-2-WEB-F1-R1	PILOT-F1	local003	E_commerce	deepseek-v3.2-web	DeepSeek-V3.2	F1	0	manual-browser	4	1				runs/LOCAL003-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from pilot-f1 pack
LOCAL003-CLAUDE-SONNET-4-6-FREE-F2-R1	PILOT-F1	local003	E_commerce	claude-sonnet-4.6-free	Claude Sonnet 4.6	F1	0	manual-browser	4	1				runs/LOCAL003-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from pilot-f1 pack
LOCAL004-CHATGPT-FREE-GPT-5-R1	PILOT-F1	local004	E_commerce	chatgpt-free-gpt-5.3	GPT-5.3	F1	0	manual-browser	4	1				runs/LOCAL004-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from pilot-f1 pack
LOCAL004-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	PILOT-F1	local004	E_commerce	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F1	0	manual-browser	4	1				runs/LOCAL004-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from pilot-f1 pack
LOCAL004-DEEPSEEK-V3-2-WEB-F1-R1	PILOT-F1	local004	E_commerce	deepseek-v3.2-web	DeepSeek-V3.2	F1	0	manual-browser	4	1				runs/LOCAL004-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from pilot-f1 pack
LOCAL004-CLAUDE-SONNET-4-6-FREE-F2-R1	PILOT-F1	local004	E_commerce	claude-sonnet-4.6-free	Claude Sonnet 4.6	F1	0	manual-browser	4	1				runs/LOCAL004-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from pilot-f1 pack
LOCAL007-CHATGPT-FREE-GPT-5-R1	PILOT-F1	local007	Baseball	chatgpt-free-gpt-5.3	GPT-5.3	F1	0	manual-browser	4	1				runs/LOCAL007-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from pilot-f1 pack
LOCAL007-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	PILOT-F1	local007	Baseball	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F1	0	manual-browser	4	1				runs/LOCAL007-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from pilot-f1 pack
LOCAL007-DEEPSEEK-V3-2-WEB-F1-R1	PILOT-F1	local007	Baseball	deepseek-v3.2-web	DeepSeek-V3.2	F1	0	manual-browser	4	1				runs/LOCAL007-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from pilot-f1 pack
LOCAL007-CLAUDE-SONNET-4-6-FREE-F2-R1	PILOT-F1	local007	Baseball	claude-sonnet-4.6-free	Claude Sonnet 4.6	F1	0	manual-browser	4	1				runs/LOCAL007-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from pilot-f1 pack
LOCAL008-CHATGPT-FREE-GPT-5-R1	MAIN-F2	local008	Baseball	chatgpt-free-gpt-5.3	GPT-5.3	F2	0	manual-browser	4	1				runs/LOCAL008-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from main-f2 pack
LOCAL008-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	MAIN-F2	local008	Baseball	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F2	0	manual-browser	4	1				runs/LOCAL008-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from main-f2 pack
LOCAL008-DEEPSEEK-V3-2-WEB-F1-R1	MAIN-F2	local008	Baseball	deepseek-v3.2-web	DeepSeek-V3.2	F2	0	manual-browser	4	1				runs/LOCAL008-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from main-f2 pack
LOCAL008-CLAUDE-SONNET-4-6-FREE-F2-R1	MAIN-F2	local008	Baseball	claude-sonnet-4.6-free	Claude Sonnet 4.6	F2	0	manual-browser	4	1				runs/LOCAL008-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from main-f2 pack
LOCAL009-CHATGPT-FREE-GPT-5-R1	MAIN-F2	local009	Airlines	chatgpt-free-gpt-5.3	GPT-5.3	F2	0	manual-browser	4	1				runs/LOCAL009-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from main-f2 pack
LOCAL009-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	MAIN-F2	local009	Airlines	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F2	0	manual-browser	4	1				runs/LOCAL009-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from main-f2 pack
LOCAL009-DEEPSEEK-V3-2-WEB-F1-R1	MAIN-F2	local009	Airlines	deepseek-v3.2-web	DeepSeek-V3.2	F2	0	manual-browser	4	1				runs/LOCAL009-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from main-f2 pack
LOCAL009-CLAUDE-SONNET-4-6-FREE-F2-R1	MAIN-F2	local009	Airlines	claude-sonnet-4.6-free	Claude Sonnet 4.6	F2	0	manual-browser	4	1				runs/LOCAL009-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from main-f2 pack
LOCAL010-CHATGPT-FREE-GPT-5-R1	MAIN-F2	local010	Airlines	chatgpt-free-gpt-5.3	GPT-5.3	F2	0	manual-browser	4	1				runs/LOCAL010-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from main-f2 pack
LOCAL010-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	MAIN-F2	local010	Airlines	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F2	0	manual-browser	4	1				runs/LOCAL010-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from main-f2 pack
LOCAL010-DEEPSEEK-V3-2-WEB-F1-R1	MAIN-F2	local010	Airlines	deepseek-v3.2-web	DeepSeek-V3.2	F2	0	manual-browser	4	1				runs/LOCAL010-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from main-f2 pack
LOCAL010-CLAUDE-SONNET-4-6-FREE-F2-R1	MAIN-F2	local010	Airlines	claude-sonnet-4.6-free	Claude Sonnet 4.6	F2	0	manual-browser	4	1				runs/LOCAL010-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from main-f2 pack
LOCAL015-CHATGPT-FREE-GPT-5-R1	MAIN-F2	local015	California_tramc_Co llision	chatgpt-free-gpt-5.3	GPT-5.3	F2	0	manual-browser	4	1				runs/LOCAL015-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from main-f2 pack
LOCAL015-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	MAIN-F2	local015	California_tramc_Co llision	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F2	0	manual-browser	4	1				runs/LOCAL015-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from main-f2 pack
LOCAL015-DEEPSEEK-V3-2-WEB-F1-R1	MAIN-F2	local015	California_tramc_Co llision	deepseek-v3.2-web	DeepSeek-V3.2	F2	0	manual-browser	4	1				runs/LOCAL015-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from main-f2 pack
LOCAL015-CLAUDE-SONNET-4-6-FREE-F2-R1	MAIN-F2	local015	California_tramc_Co llision	claude-sonnet-4.6-free	Claude Sonnet 4.6	F2	0	manual-browser	4	1				runs/LOCAL015-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from main-f2 pack
LOCAL017-CHATGPT-FREE-GPT-5-R1	MAIN-F2	local017	California_tramc_Co llision	chatgpt-free-gpt-5.3	GPT-5.3	F2	0	manual-browser	4	1				runs/LOCAL017-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from main-f2 pack
LOCAL017-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	MAIN-F2	local017	California_tramc_Co llision	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F2	0	manual-browser	4	1				runs/LOCAL017-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from main-f2 pack
LOCAL017-DEEPSEEK-V3-2-WEB-F1-R1	MAIN-F2	local017	California_tramc_Co llision	deepseek-v3.2-web	DeepSeek-V3.2	F2	0	manual-browser	4	1				runs/LOCAL017-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from main-f2 pack
LOCAL017-CLAUDE-SONNET-4-6-FREE-F2-R1	MAIN-F2	local017	California_tramc_Co llision	claude-sonnet-4.6-free	Claude Sonnet 4.6	F2	0	manual-browser	4	1				runs/LOCAL017-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from main-f2 pack
LOCAL018-CHATGPT-FREE-GPT-5-R1	MAIN-F2	local018	California_tramc_Co llision	chatgpt-free-gpt-5.3	GPT-5.3	F2	0	manual-browser	4	1				runs/LOCAL018-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from main-f2 pack
LOCAL018-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	MAIN-F2	local018	California_tramc_Co llision	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F2	0	manual-browser	4	1				runs/LOCAL018-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from main-f2 pack
LOCAL018-DEEPSEEK-V3-2-WEB-F1-R1	MAIN-F2	local018	California_tramc_Co llision	deepseek-v3.2-web	DeepSeek-V3.2	F2	0	manual-browser	4	1				runs/LOCAL018-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from main-f2 pack
LOCAL018-CLAUDE-SONNET-4-6-FREE-F2-R1	MAIN-F2	local018	California_tramc_Co llision	claude-sonnet-4.6-free	Claude Sonnet 4.6	F2	0	manual-browser	4	1				runs/LOCAL018-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from main-f2 pack
LOCAL019-CHATGPT-FREE-GPT-5-R1	MAIN-F2	local019	WWE	chatgpt-free-gpt-5.3	GPT-5.3	F2	0	manual-browser	4	1				runs/LOCAL019-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from main-f2 pack
LOCAL019-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	MAIN-F2	local019	WWE	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F2	0	manual-browser	4	1				runs/LOCAL019-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from main-f2 pack
LOCAL019-DEEPSEEK-V3-2-WEB-F1-R1	MAIN-F2	local019	WWE	deepseek-v3.2-web	DeepSeek-V3.2	F2	0	manual-browser	4	1				runs/LOCAL019-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from main-f2 pack
LOCAL019-CLAUDE-SONNET-4-6-FREE-F2-R1	MAIN-F2	local019	WWE	claude-sonnet-4.6-free	Claude Sonnet 4.6	F2	0	manual-browser	4	1				runs/LOCAL019-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from main-f2 pack
LOCAL020-CHATGPT-FREE-GPT-5-R1	MAIN-F2	local020	IPL	chatgpt-free-gpt-5.3	GPT-5.3	F2	0	manual-browser	4	1				runs/LOCAL020-CHATGPT-FREE-GPT-5-R1		Planned	Seeded from main-f2 pack
LOCAL020-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1	MAIN-F2	local020	IPL	gemini-2.5-pro-aistudio-free	Gemini 2.5 Pro	F2	0	manual-browser	4	1				runs/LOCAL020-GEMINI-2-5-PRO-AI-STUDIO-FREE-F1-R1		Planned	Seeded from main-f2 pack
LOCAL020-DEEPSEEK-V3-2-WEB-F1-R1	MAIN-F2	local020	IPL	deepseek-v3.2-web	DeepSeek-V3.2	F2	0	manual-browser	4	1				runs/LOCAL020-DEEPSEEK-V3-2-WEB-F1-R1		Planned	Seeded from main-f2 pack
LOCAL020-CLAUDE-SONNET-4-6-FREE-F2-R1	MAIN-F2	local020	IPL	claude-sonnet-4.6-free	Claude Sonnet 4.6	F2	0	manual-browser	4	1				runs/LOCAL020-CLAUDE-SONNET-4-6-FREE-F2-R1		Planned	Seeded from main-f2 pack

Run Plan seeded with the four free models and the pilot/main packs.

	A	B	C	D	E	F	G	H	I	J	K	L
1	**Task Manifest (Spider2-Lite SQLite subset)**											
2	Enter only the fixed tasks you have approved for the pilot or main run. One row = one dataset task.											
3												
4	**task_id**	**dataset_split**	**db_name**	**db_path**	**question**	**schema_hash / version**	**oracle_result_file**	**difficulty_band**	**pilot?**	**main?**	**recording_segment**	**notes**
5	local002	spider2-lite-sqlite	E_commerce	Spider2/spider2-lite/resource/databases/spider2-local/e_commerce/e_commerce.sqlite	For December 5 to 8, 2018, using daily sales data from January 1, 2017, to August 29, 2018, with a simple linear regression model? Finally provide the				Yes	No	PILOT	rerunning this script with
6	local003	spider2-lite-sqlite	E_commerce	Spider2/spider2-lite/resource/databases/spider2-local/e_commerce/e_commerce.sqlite	calculate Recency based on the latest purchase timestamp and specify the				Yes	No	PILOT	RFM.md
7	local004	spider2-lite-sqlite	E_commerce	Spider2/spider2-lite/resource/databases/spider2-local/e_commerce/e_commerce.sqlite	payment per order, where the lifespan is calculated by subtracting the earliest				Yes	No	PILOT	rerunning this script with
8	local007	spider2-lite-sqlite	Baseball	Spider2/spider2-lite/resource/databases/spider2-local/baseball/baseball.sqlite	final game dates. For each player, the career span is computed as the sum of the absolute number of years, plus the absolute number of months divided				Yes	No	PILOT	rerunning this script with
9	local008	spider2-lite-sqlite	Baseball	Spider2/spider2-lite/resource/databases/spider2-local/baseball/baseball.sqlite	the highest value of games played, runs, hits, and home runs, with their				No	Yes	MAIN	rerunning this script with
10	local009	spider2-lite-sqlite	Airlines	Spider2/spider2-lite/resource/databases/spider2-local/airlines/airlines.sqlite	What is the distance of the longest route where Abakan is either the departure or destination city (in kilometers)?				No	Yes	MAIN	haversine_formula.md
11	local010	spider2-lite-sqlite	Airlines	Spider2/spider2-lite/resource/databases/spider2-local/airlines/airlines.sqlite	3000, 4000, 5000, and 6000, based on their average distance of all routes between them. Then, how many pairs are there in the distance range with the				No	Yes	MAIN	haversine_formula.md
12	local015	spider2-lite-sqlite	California_Traffic_Collision	Spider2/spider2-lite/resource/databases/spider2-local/california_traffic_collision/california_traffic_collision.sqlite	wearing helmets, and 2) the percentage of motorcyclist fatalities in collisions				No	Yes	MAIN	rerunning this script with
13	local017	spider2-lite-sqlite	California_Traffic_Collision	Spider2/spider2-lite/resource/databases/spider2-local/california_traffic_collision/california_traffic_collision.sqlite	In which year were the two most common causes of traffic accidents different from those in other years?				No	Yes	MAIN	rerunning this script with
14	local018	spider2-lite-sqlite	California_Traffic_Collision	Spider2/spider2-lite/resource/databases/spider2-local/california_traffic_collision/california_traffic_collision.sqlite	cause of traffic accidents in 2021, how many percentage points did its share				No	Yes	MAIN	rerunning this script with
15	local019	spider2-lite-sqlite	WWE	Spider2/spider2-lite/resource/databases/spider2-local/wwe/wwe.sqlite	For the NXT title that had the shortest match (excluding titles with "title change"), what were the names of the two wrestlers involved?				No	Yes	MAIN	rerunning this script with
16	local020	spider2-lite-sqlite	IPL	Spider2/spider2-lite/resource/databases/spider2-local/ipl/ipl.sqlite	Which bowler has the lowest bowling average per wicket taken?				No	Yes	MAIN	rerunning this script with
17	local025	spider2-lite-sqlite	IPL	Spider2/spider2-lite/resource/databases/spider2-local/ipl/ipl.sqlite	with the highest total runs, retrieve the bowler for that over from the ball by				No	No	RESERVE	rerunning this script with
18	local026	spider2-lite-sqlite	IPL	Spider2/spider2-lite/resource/databases/spider2-local/ipl/ipl.sqlite	the match in which they conceded these maximum runs. Only consider overs				No	No	RESERVE	rerunning this script with
19	local028	spider2-lite-sqlite	Brazilian_E_Commerce	Spider2/spider2-lite/resource/databases/spider2-local/brazilian_e_commerce/brazilian_e_commerce.sqlite	each month in the years 2016, 2017, and 2018? Each column represents a				No	No	RESERVE	rerunning this script with
20	local031	spider2-lite-sqlite	Brazilian_E_Commerce	Spider2/spider2-lite/resource/databases/spider2-local/brazilian_e_commerce/brazilian_e_commerce.sqlite	What is the highest monthly delivered orders volume in the year with the lowest annual delivered orders volume among 2016, 2017, and 2018?				No	No	RESERVE	rerunning this script with

Tasks sheet seeded from the curated Spider2-Lite SQLite pack.

Run Summary

This sheet rolls up one row per run using the Turn Log and Stability Checks sheets. Rows map directly to the Run Plan.

run_id	task_id	model_id	protocol_id	replicate	T_max	logged_turns	first_pass_turn	final_turn	final_state	final_severity	improvements	regressions	oscillations	pass_within_T	reexec_passes	reprompt_passes	status	analyst_note
LOCAL002-CHATGPT-FREE-GPT-5.3-F1-R1	local002	chatgpt-free-gpt-5.3	F1	1	4	0	0	0			0	0	0	No	0	0	Planned	

Run Summary formula roll-up sheet.

4. Variable dictionary: Tasks

Variable	Why it matters	Populated by
task_id	Stable Spider2-Lite instance identifier. The runner uses this to load the task and resolve the correct database/oracle.	Seeded by script 10 or repaired from Spider2 by script 09.
dataset_split	Marks the benchmark subset used in the study.	Seeded by script 10.
db_name	Logical database name, used to resolve the .sqlite file.	Seeded by script 10.
db_path	Expected local path to the SQLite database.	Seeded by script 10; validated by script 02.
question	Natural-language instruction sent to the model.	Seeded by script 10 from the curated task pack or Spider2.
schema_hash / version	Reserved field for future schema versioning or local checksum.	Manual/optional.
oracle_result_file	Gold exec-result or gold SQL file used for correctness checking.	Filled when Spider2 root is available.
difficulty_band	Optional annotation for reporting slices.	Manual/optional.
pilot?	Flags tasks used only for workflow shakedown.	Seeded by script 10.
main?	Flags tasks used in headline comparisons.	Seeded by script 10.
recording_segment	Lets you align tasks with video/audio recording segments.	Seeded by script 10; can be edited manually.
notes	Stores support-doc names or curator notes.	Seeded by script 10; editable.

5. Variable dictionary: Run Plan

Variable	Why it matters	Populated by
run_id	Unique trajectory ID; every artifact file, log row, and workbook row keys off this field.	Seeded by script 10; updated by script 04 if run rows are synced.

Variable	Why it matters	Populated by
batch_id	Groups runs into pilot/main/holdout batches.	Seeded by script 10.
task_id	Links the trajectory to one row in Tasks.	Seeded by script 10.
db_name	Database associated with the task.	Seeded by script 10.
model_id	Stable study identifier for the model family and access mode.	Seeded by script 10.
model_snapshot	Exact visible UI label that the operator saw at test time.	Seeded by script 10; should be corrected manually if the provider UI changes.
protocol_id	Feedback condition used in the run: F0/F1/F2/F3.	Seeded by script 10.
temperature	Decoding temperature, kept at 0 for manual browser parity unless explicitly changed.	Seeded by script 10.
reasoning_mode	Manual-browser or other mode label for reproducibility.	Seeded by script 10.
T_max	Maximum number of turns allowed in the trajectory.	Seeded from the study protocol.
replicate	Replicate number for repeated trajectories.	Seeded by script 10.
operator	Human operator running the browser test.	Manual.
planned_date	Planned execution date.	Manual.
record_file	Optional recording filename if the session was screen-recorded.	Manual.
artifact_folder	Relative folder name for run artifacts.	Seeded by script 10.
commit_hash	Git commit used at run time.	Manual/recommended before release analysis.
status	Planned / In progress / Complete.	Seeded by script 10 and updated by script 03 + script 04.
notes	Planning notes, fallback events, UI changes, or exceptions.	Manual.

6. Variable dictionary: Turn Log

Variable	Why it matters	Populated by
batch_id	Inherited batch label so turns can be grouped without joining Run Plan.	Script 03 → script 04.
run_id	Primary key part 1 for turn-level logs.	Script 03 → script 04.
turn_no	Primary key part 2; chronological turn index.	Script 03 → script 04.
task_id	Task identifier repeated for easy filtering.	Script 03 → script 04.
db_name	Database name repeated for fast slicing.	Script 03 → script 04.
model_id	Model used for the trajectory.	Script 03 → script 04.
protocol_id	Feedback condition used on that run.	Script 03 → script 04.
prompt_file	Saved prompt text for this turn.	Script 03 → script 04.
response_file	Raw pasted browser response.	Script 03 → script 04.
extracted_sql_file	Extracted SQL query saved as .sql.	Script 03 → script 04.
prompt_hash	Content hash of the prompt, used for auditability.	Script 03 → script 04.
exec_ms	Execution runtime in milliseconds.	Script 03 → script 04.
rows_pred	Predicted result-table row count.	Script 03 → script 04.
rows_gold	Oracle result-table row count.	Script 03 → script 04.
symdiff_rows	Symmetric difference size between predicted and oracle rows.	Script 03 → script 04.
sqlite_error	Exact SQLite engine error when execution fails.	Script 03 → script 04.
exec_state	Turn label in {FormatError, SyntaxError, SchemaError, RuntimeError, Timeout, WrongResult, Pass}.	Script 03 → script 04.
severity	Numeric severity mapped from exec_state for transition analysis.	Workbook formula / script 04.
helper_key	run_id|turn_no helper key for formula lookups.	Workbook formula / script 04.

Variable	Why it matters	Populated by
helper_prev_key	run_id|turn_no-1 helper key for formula lookups.	Workbook formula / script 04.
prev_state	Previous turn state for the same run.	Workbook formula / script 04.
prev_severity	Previous turn severity for the same run.	Workbook formula / script 04.
state_change	1 if current state differs from previous state.	Workbook formula / script 04.
improved	1 if severity decreased versus previous turn.	Workbook formula / script 04.
regressed	1 if severity increased versus previous turn.	Workbook formula / script 04.
pass_flag	1 if the turn reached Pass.	Workbook formula / script 04.
feedback_file	Saved feedback payload that seeded the next revision.	Script 03 → script 04.
screenshot_file	Optional screenshot evidence path.	Manual / script 04 if you populate it.
recording_timestamp	Timestamp within the operator recording.	Script 03 → script 04, editable.
notes	Free-form turn notes such as extraction mode.	Script 03 → script 04, editable.
review_flag	Manual QA marker for analyst review.	Manual.

7. Variable dictionary: Run Summary

Variable	Why it matters	Populated by
run_id	One-row-per-trajectory key copied from Run Plan.	Formula sheet.
task_id	Task identifier for summarization.	Formula sheet.
model_id	Model identifier for summarization.	Formula sheet.
protocol_id	Feedback condition for summarization.	Formula sheet.
replicate	Replicate ID.	Formula sheet.
T_max	Turn cap for the run.	Formula sheet.
logged_turns	How many turns were actually logged.	Formula sheet from Turn Log.
first_pass_turn	Earliest turn that reached Pass.	Formula sheet from Turn Log.

Variable	Why it matters	Populated by
final_turn	Last turn executed.	Formula sheet from Turn Log.
final_state	Terminal state of the run.	Formula sheet from Turn Log.
final_severity	Severity of the terminal state.	Formula sheet from Turn Log.
improvements	Count of severity-improving transitions.	Formula sheet from Turn Log.
regressions	Count of severity-worsening transitions.	Formula sheet from Turn Log.
oscillations	Count of state changes across turns.	Formula sheet from Turn Log.
pass_within_T	Yes/No flag for whether the run ever passed within the cap.	Formula sheet.
reexec_passes	How many stability re-executions stayed Pass.	Formula sheet from Stability Checks.
reprompt_passes	Reserved for later reprompt stability checks.	Formula sheet from Stability Checks.
status	Planned/In progress/Complete mirror from Run Plan.	Formula sheet.
analyst_note	Manual interpretation note for paper writing.	Manual.

8. Variable dictionary: Stability Checks

Variable	Why it matters	Populated by
run_id	Passing trajectory being checked.	Script 06 → script 04.
pass_turn	Turn number where the original run first passed.	Script 06 → script 04.
check_type	Re-execution or Re-prompt.	Script 06 → script 04.
repeat_no	Repeat index for the stability check.	Script 06 → script 04.
outcome_state	State after rerunning the supposedly passing SQL.	Script 06 → script 04.
stable_pass?	Yes if the rerun still passes.	Script 06 → script 04.
evidence_file	SQL file used in the stability check.	Script 06 → script 04.
notes	Optional analyst note about the stability event.	Manual.

9. Reference sheets: Lookups and Prompt Library

Area	Why it matters	Populated by
exec_state / severity	Maps each symbolic state to an ordinal severity used by workbook formulas and analysis exports.	Seeded by script 10.
protocol_id / description	Defines what F0, F1, F2, and F3 mean.	Seeded by script 10.
model_id / provider / recommended_use / status	Reference roster of approved model labels.	Seeded by script 10.
yes_no / owners	Small helper lists for validation and ownership.	Template / script 10.
template_id	Stable identifier such as T1_SQL or REV_F2.	Seeded by script 10.
used_when	Operational use of the prompt.	Seeded by script 10.
version	Prompt revision tag. In this package, v2 means the prompt includes supporting_context.	Seeded by script 10.
template_text	The exact tracked prompt text.	Seeded by script 10 from files in prompts/.
required_variables	Fields the runner must inject before sending the prompt to a model.	Seeded by script 10.
notes	Traceability note pointing back to the source file.	Seeded by script 10.

10. Which scripts touch which sheets

Script	Sheets affected
09_repair_workbook.py	Repairs workbook layout and formulas; can repopulate Tasks from Spider2
10_seed_workbook_reference_data.py	Seeds Lookups, Prompt Library, Tasks, Run Plan, and Dashboard
04_sync_logs_to_workbook.py	Writes Run Plan, Turn Log, Stability Checks, Run Summary, and Dashboard
03_run_trajectory_manual.py	Indirect only; creates JSONL logs used by script 04
06_run_stability_checks.py	Indirect only; creates stability JSONL used by script 04
05_generate_analysis_tables.py	No sheet write; generates external analysis files

11. Why the analytical variables matter

- Severity creates an ordered notion of error seriousness so turns can be compared numerically.
- Improved, regressed, and oscillations are the workbook-side bridge to the paper’s trajectory metrics.
- first_pass_turn separates quick recoveries from slow or brittle repairs.
- rows_pred, rows_gold, and symdiff_rows make wrong-result failures interpretable instead of opaque.
- model_snapshot is critical because browser providers can silently change the active model label.
- prompt_hash protects the study against undocumented prompt drift.
- stability rows distinguish robust passes from one-off passes.

12. How graphs and testing map back to the workbook

The workbook dashboard is a compact tracker. The actual analysis graphs are produced outside the workbook by script 05. The sample smoke charts below show the two headline export types this package generates.

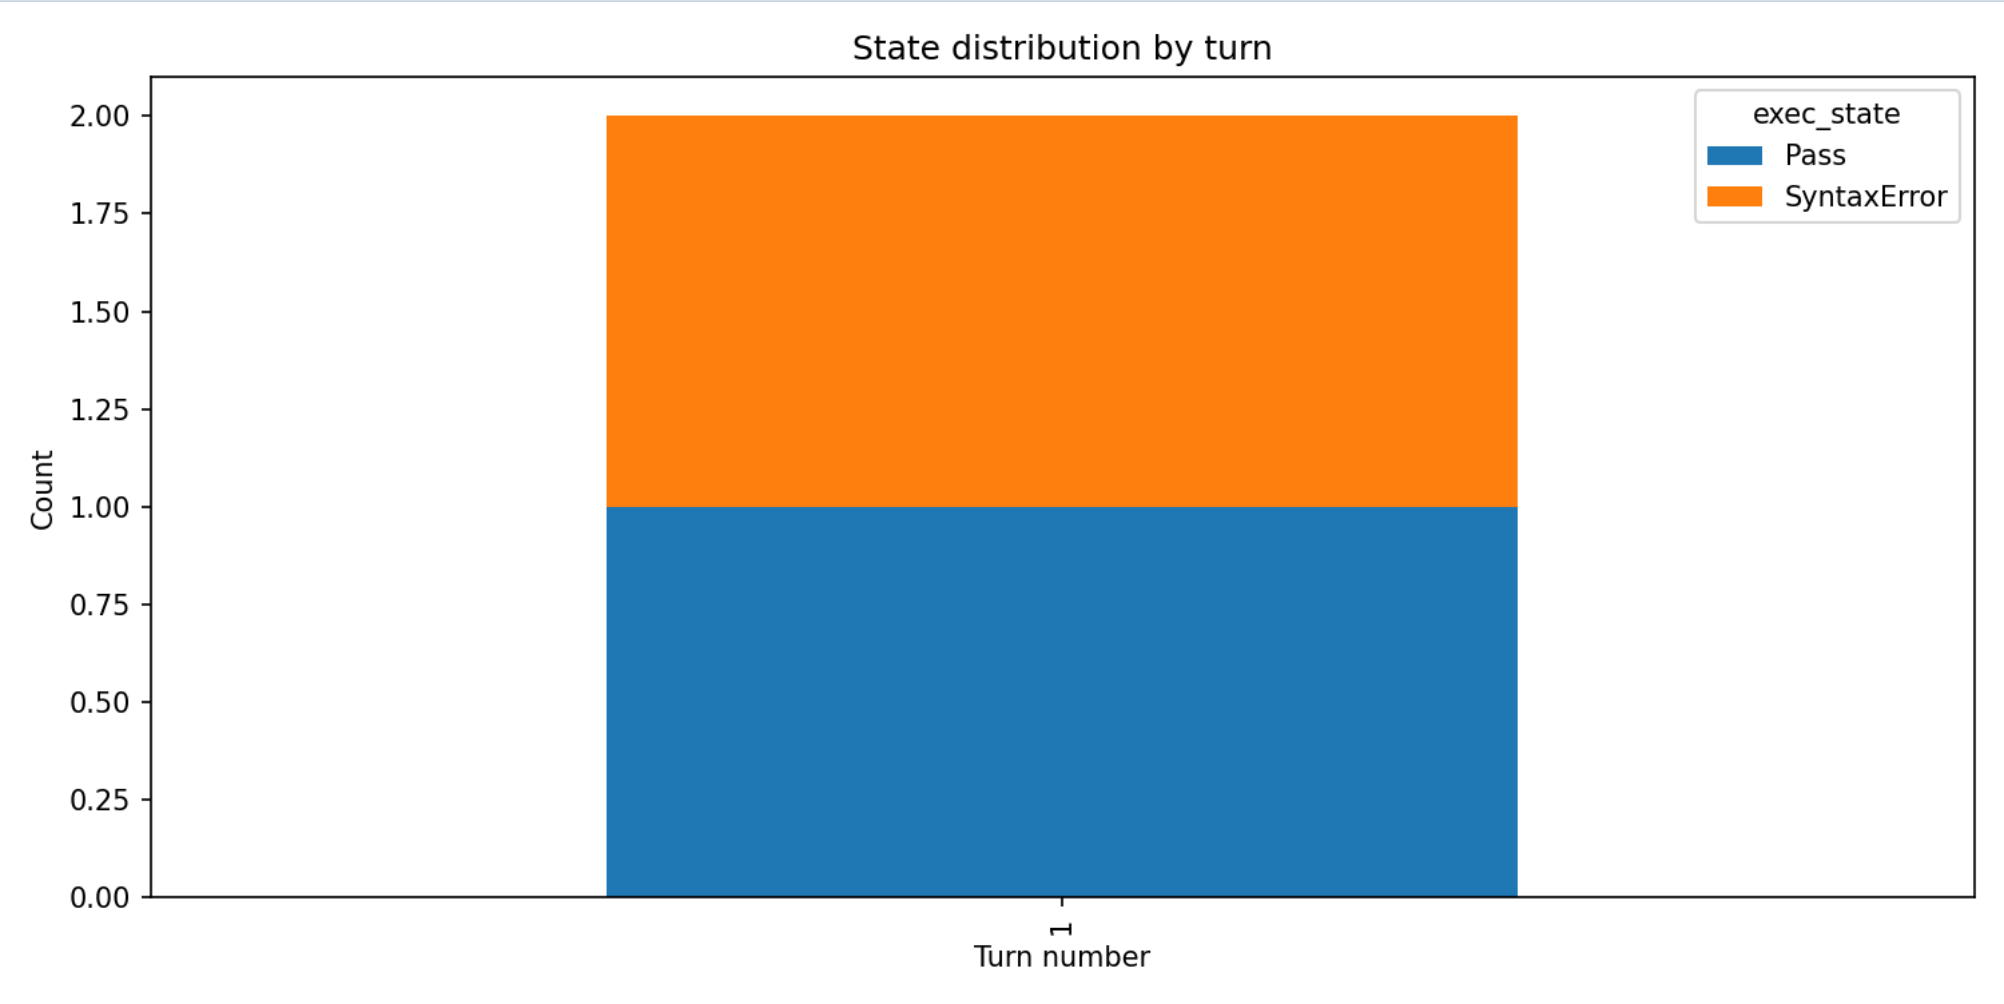

Sample stacked chart of state distribution by turn from script 05.

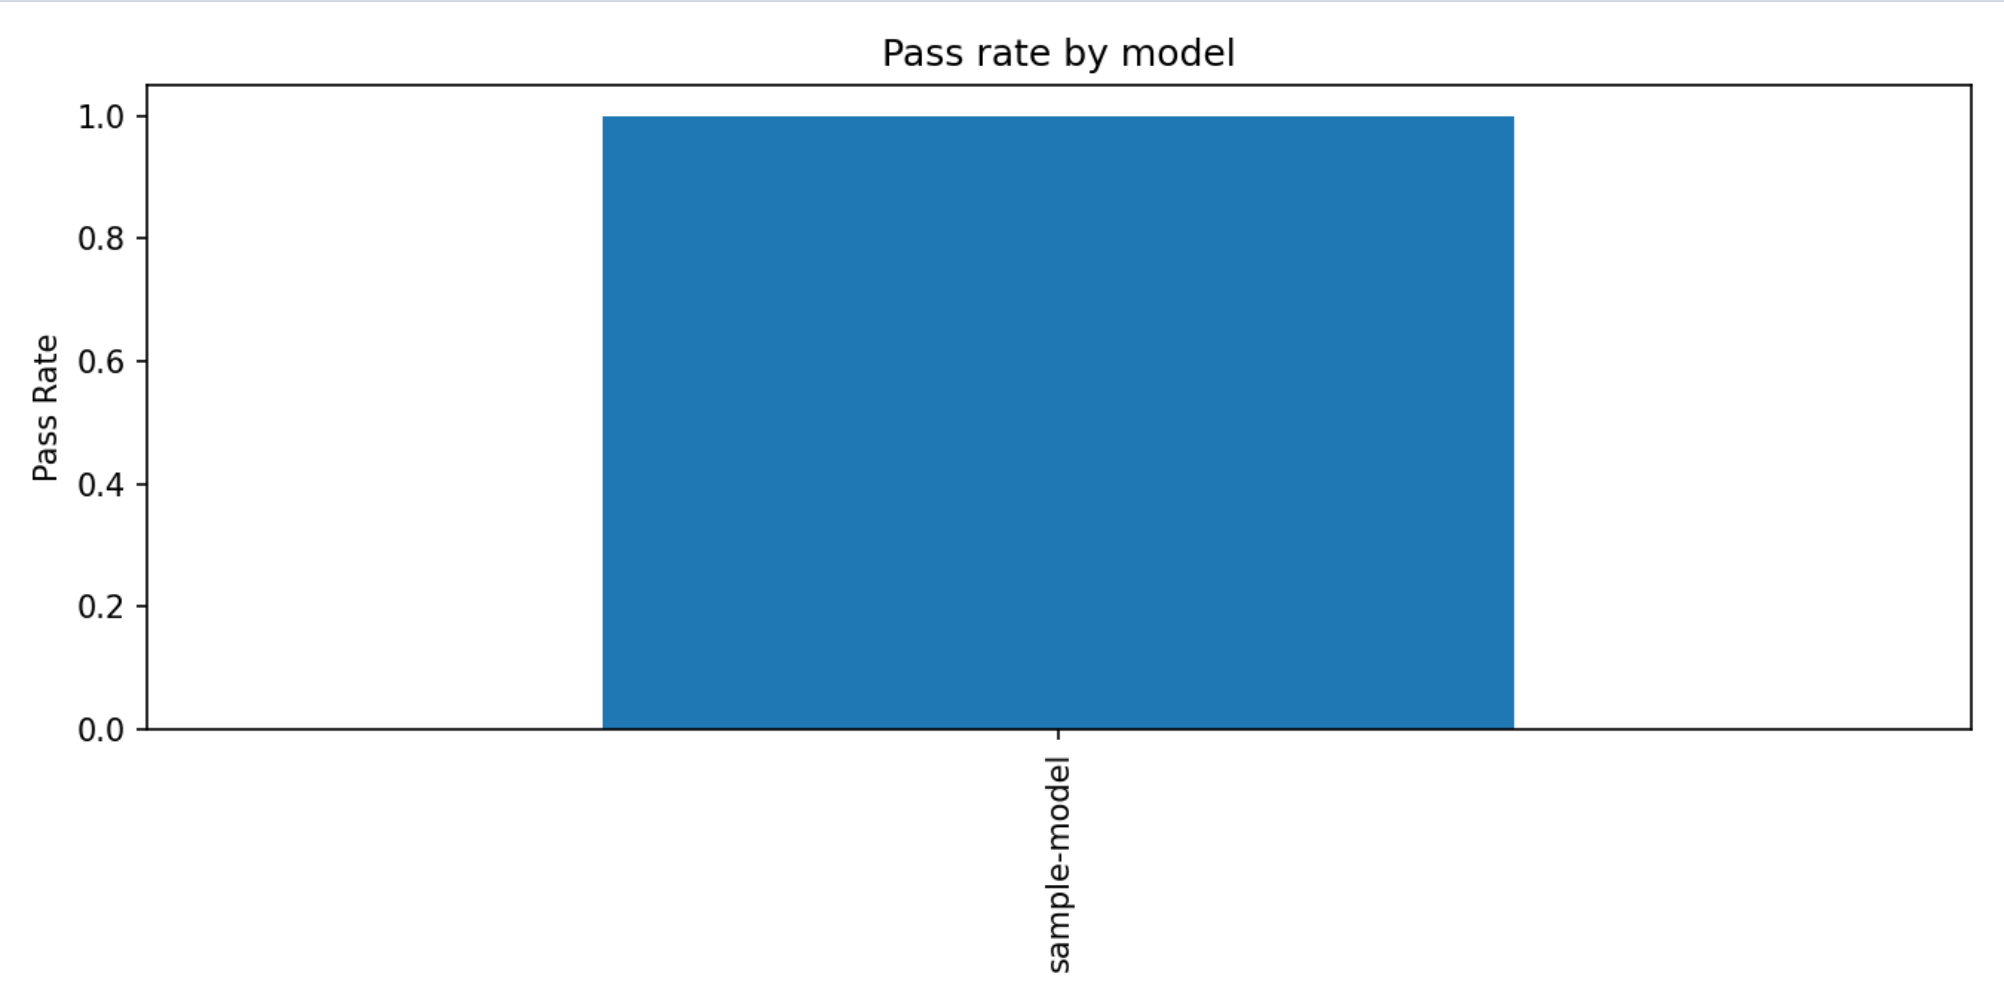

Sample pass-rate-by-model chart from script 05.

Operationally: script 03 produces JSONL logs; script 04 turns those into workbook rows and formulas; script 05 turns the same logs into paper-facing CSVs and PNG charts. The workbook and the analysis exports therefore stay aligned because they are both downstream of the same machine logs.

13. Proper workbook workflow

- Seed the workbook before you begin the pilot.
- Do not change the task pack or planned model roster after the main comparison starts.
- Sync the workbook after every trajectory or run block.
- Run stability checks only after Pass.
- Copy selected evidence to docs/testing-evidence before committing.
- Use script 09 + script 10 whenever you need to reset the workbook to a clean state.

References

1. Chen, X., Lin, M., Schärli, N., & Zhou, D. *Teaching Large Language Models to Self-Debug*. 2023.
2. XLANG Lab. *Spider2 repository*. 2026.
3. XLANG Lab. *Spider2-Lite README* and *Spider-Agent-Lite README*. 2026.