


Validate Before Commit: label-efficient gating of drift-triggered classifier updates for NIDS

Detection $\neq$ decision: retraining restores accuracy to a nearly regime-invariant level, so an update's benefit is the incumbent's headroom — which detector scores do not measure (per-trigger $r \approx 0$).

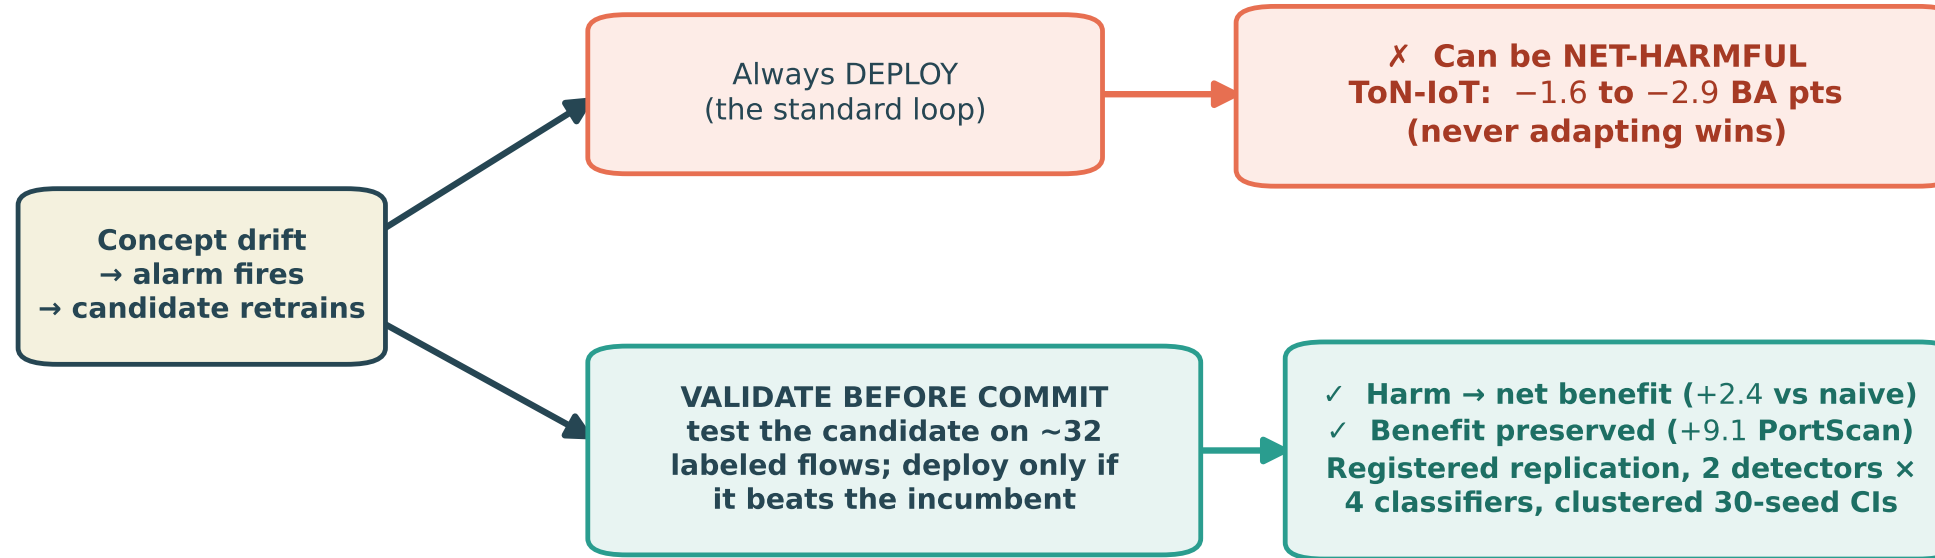

decision cost: tens of labels (candidates: ~1,024/trigger, accounted) • probes may be 20 windows stale • harm-avoiding up to 40% flipped labels
boundary mapped: pays a premium on deep-benefit chronological streams • registered protocol + amendments, public tag • reproducible artifact