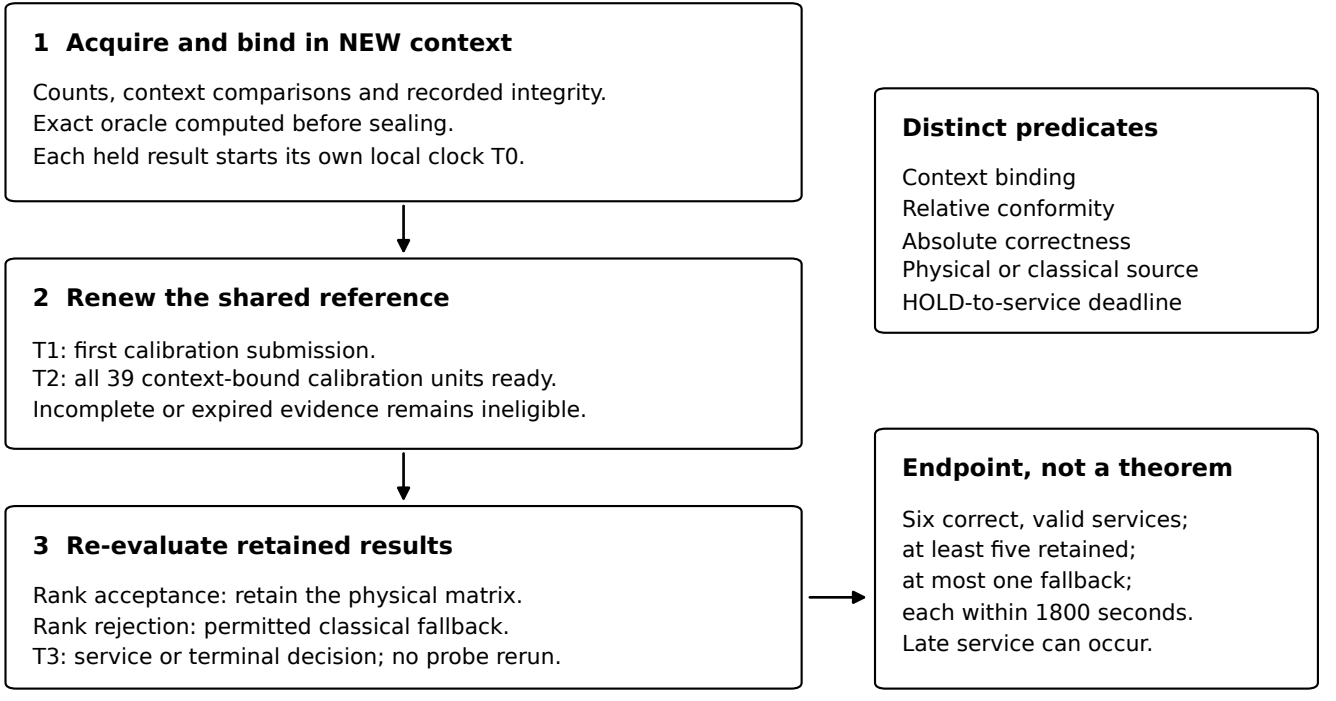

1 Acquire and bind in NEW context
Counts, context comparisons and recorded integrity.
Exact oracle computed before sealing.
Each held result starts its own local clock T0.
2 Renew the shared reference
T1: first calibration submission.
T2: all 39 context-bound calibration units ready.
Incomplete or expired evidence remains ineligible.
3 Re-evaluate retained results
Rank acceptance: retain the physical matrix.
Rank rejection: permitted classical fallback.
T3: service or terminal decision; no probe rerun.
Distinct predicates
Context binding
Relative conformity
Absolute correctness
Physical or classical source
HOLD-to-service deadline
Endpoint, not a theorem
Six correct, valid services;
at least five retained;
at most one fallback;
each within 1800 seconds.
Late service can occur.