
4/6/25, 19:26 Application Details

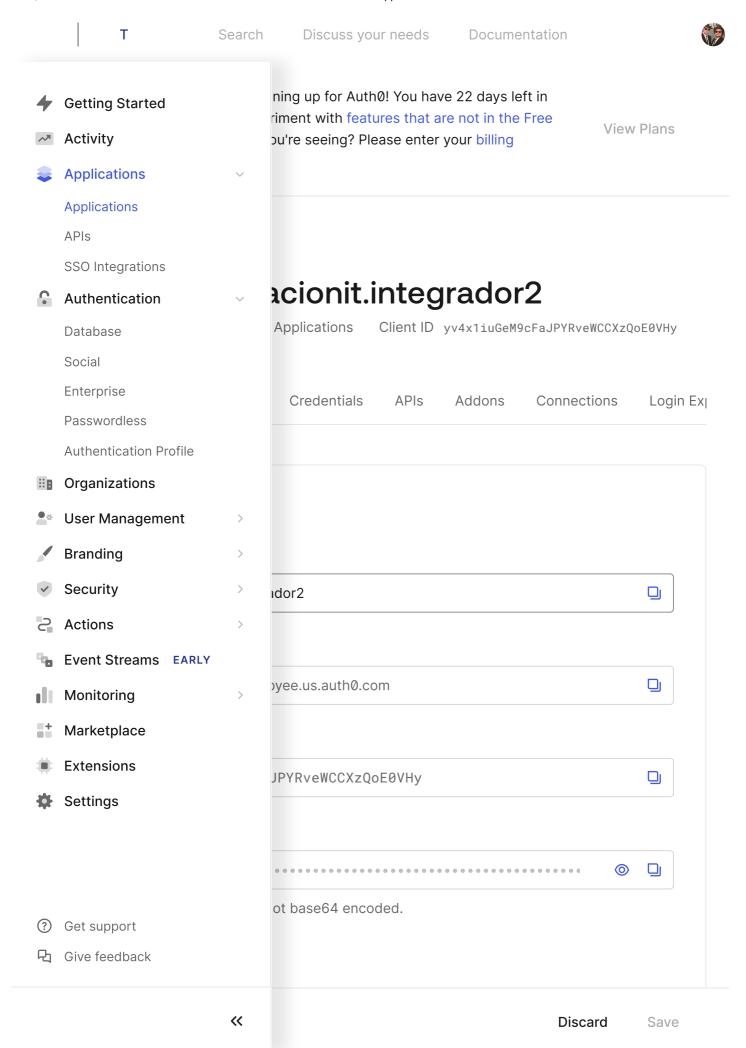

Add a description in less than 140 characters

Getting Started

Activity

Applications

Applications

APIs

SSO Integrations

Authentication

Database

Social

Enterprise

Passwordless

Authentication Profile

Organizations

User Management

Branding

Security

Actions

Event Streams EARLY

Monitoring

Marketplace

Extensions

Settings

? Get support

Give feedback

n of the application. Max character count is 140. **ties**



my_logo.png

o display for the application, if none is set the default badge ation will be shown. Recommended size is 150×150 pixels.

cation

on will determine which settings you can configure from the

or the token_endpoint_auth_method field, this has moved dentials tab for easier and more secure management.

login

a route in your application that should redirect to your endpoint. Learn more 17

http://localhost:8081/integrador2/callback

♣ Getting Started Activity Applications Applications Applications APIs SSO Integrations Authentication Database Social Enterprise Passwordless Authentication Profile

ticates we will only call back to any of these URLs. You can URLs by comma-separating them (typically to handle is like QA or testing). Make sure to specify the protocol se the callback may fail in some cases. With the exception of for native clients, all callbacks should use protocol se Organization URL parameters in these URLs.

31/integrador2/logout

t of allowed logout URLs for redirecting users post-logout. s at the subdomain level (*.google.com). Query strings and not taken into account when validating these URLs.

Organizations

User Management

Branding >
Security >
Actions >

Event Streams EARLY

Monitoring

Marketplace

Extensions

Settings

? Get support
Give feedback

it of allowed origins for use with ication [7], Device Flow [7], and se mode [7], in the form of <scheme>://<host>[:<port>], in.mydomain.com or http://localhost:3000 . You can use lomain level (e.g.: https://*.contoso.com). Query strings are not taken into account when validating these URLs.

ack-Channel Logout

ore about OpenID Connect Back-Channel Logout 团

t URI

backchannel-logout



aceive a logout_token when selected Back-Channel Logout with a querystring will be re-encoded properly.

Back-Channel Logout Initiators Calanta d'initiators only **Getting Started** initiators Activity on selected Back-Channel Logout initiators only. **Applications Applications** REQUIRED **APIs EQUIRED** SSO Integrations Authentication ed ③ Database ? Social ? Enterprise Passwordless ? **Authentication Profile** ited ? Organizations **User Management Branding** entication Security uthentication **Actions** 😘 Event Streams EARLY origin authentication allows applications to make sts when the Lock widget or custom HTML is used. Monitoring (S) Marketplace **Extensions** Settings allowed to make cross-origin resource sharing (CORS) lback URLs are already included in this list. na-separated or added line-by-line at the subdomain level (e.g. https://*.contoso.com) ? Get support hash information are ignored placeholders are supported Give feedback

		nird-party cookies are not enabled in the browser. URL must ne same domain as the embedded login widget.
Getting Started		
Activity		
Applications	~	
Applications		fetime *
APIs		seconds
SSO Integrations		en expires regardless of activity.
Authentication	~	
Database		
Social		iration
Enterprise		
Passwordless		n Lifetime
Authentication Profile		
Organizations		ens to expire after a set period of inactivity. resh token expiration 🗹
User Management	>	
Branding	>	fetime *
Security	>	seconds
Actions	>	Talan lifetina
Event Streams EARLY		n Token Lifetime
Monitoring	>	ens to expire after a set period regardless of activity.
† Marketplace		oken rotation. <u>Learn more about refresh token expiration</u> ☑
Extensions		ken Lifetime *
Settings		
, Journay		seconds
② Get support		ation

exchanged for new tokens to prevent replay attacks. Requires a maximum refresh token lifetime I earn make about refresh token rotation [7] **Getting Started** seconds Activity st recently-used refresh token can be reused without ection. **Applications Applications APIs** SSO Integrations straining Authentication r-Constraining Database Social ss tokens must be constrained to this application to prevent Enterprise eaked or stolen tokens. en sender-constraining 🗗 Passwordless **Authentication Profile** Organizations **User Management Jests Branding** orization Requests (PAR) Security **Actions** rization request parameters must be sent using back-channel infidentiality and integrity protection. Requires tenant to allow 😘 Event Streams EARLY <u>ut Pushed Authorizarion Requests (PAR)</u> <a>□ Monitoring d Authorization Requests (JAR) Marketplace **Extensions** rization request parameters must be wrapped in a signed /T) for cryptographically confirmed non-repudiation. Settings ? Get support tings Give feedback

When allowed, refresh tokens will automatically be invalidated after use and

Danger Zone

