



Rosas, Martin Luis

## Tema viejo

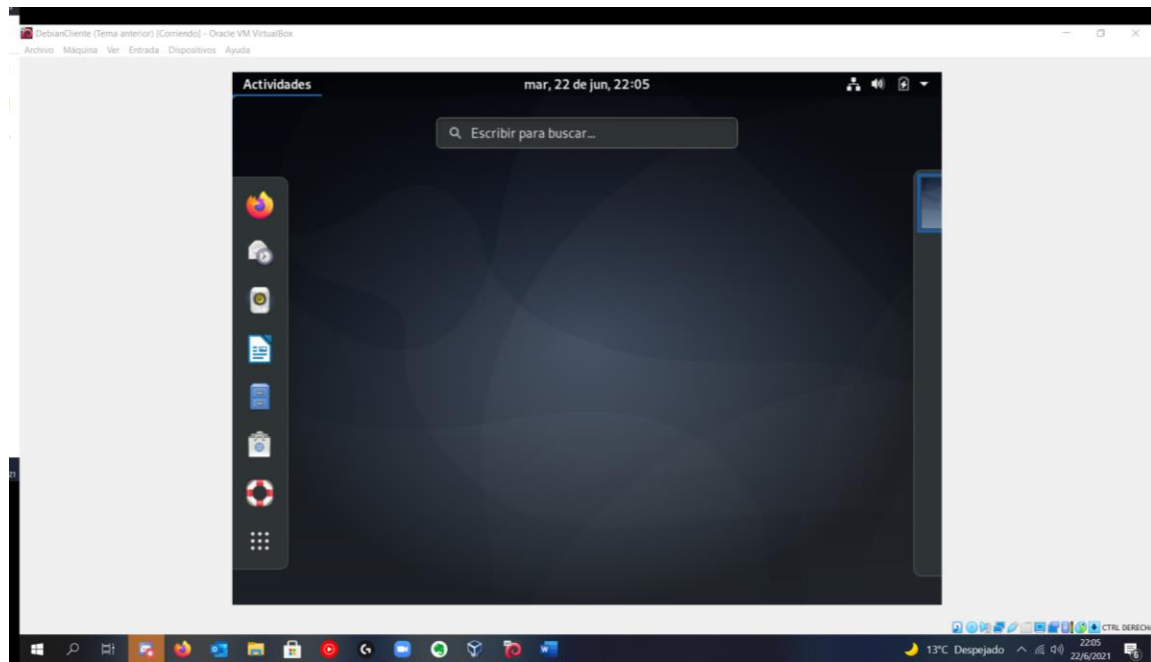


## Tema nuevo

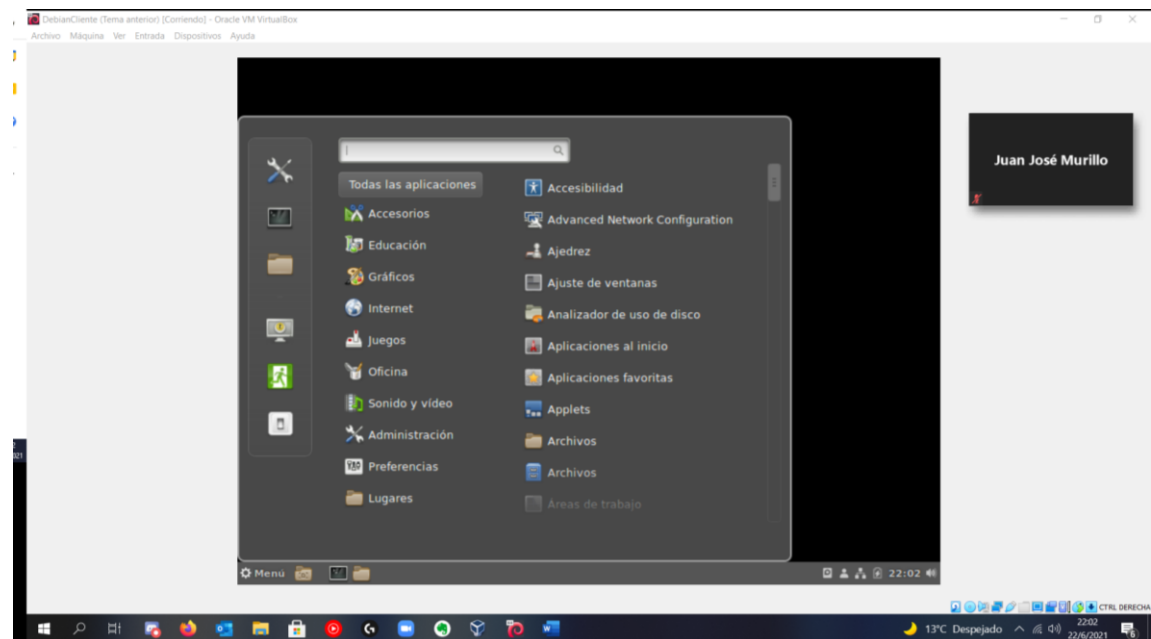


Commands: **\$ sudo apt-get install cinnamon**

## Actualizar Sistema operativo: \$ apt update

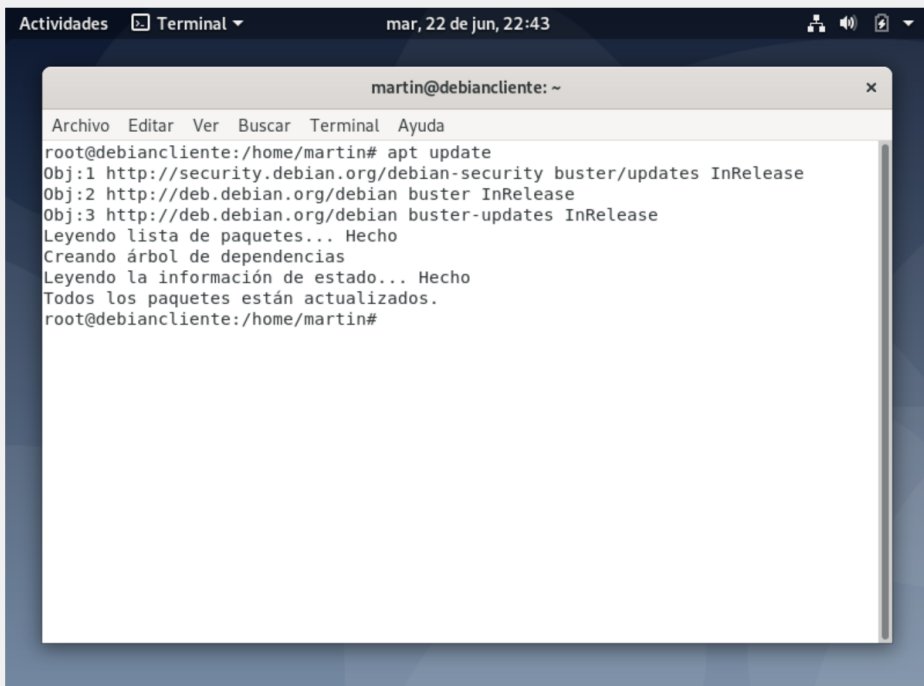A terminal window titled 'martin@debiancliente: ~' with a menu bar (Archivo, Editar, Ver, Buscar, Terminal, Ayuda). The terminal shows the execution of 'apt update' as root. It lists three objects from Debian repositories, reads the package list, creates a dependency tree, and confirms that all packages are updated.

```
martin@debiancliente: ~
Archivo Editar Ver Buscar Terminal Ayuda
root@debiancliente:/home/martin# apt update
Obj:1 http://security.debian.org/debian-security buster/updates InRelease
Obj:2 http://deb.debian.org/debian buster InRelease
Obj:3 http://deb.debian.org/debian buster-updates InRelease
Leyendo lista de paquetes... Hecho
Creando árbol de dependencias
Leyendo la información de estado... Hecho
Todos los paquetes están actualizados.
root@debiancliente:/home/martin#
```

Comando: \$ sudo rm -r /

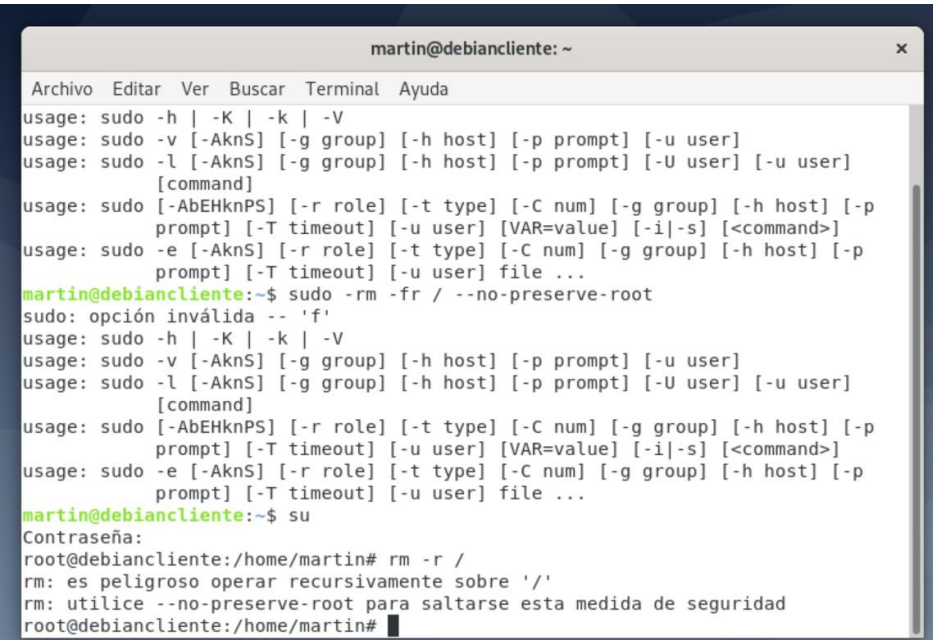A terminal window titled 'martin@debiancliente: ~' showing the execution of 'sudo rm -fr / --no-preserve-root'. It displays the usage for 'sudo' and 'rm', followed by an error message for the invalid option '-f'. Then, the user switches to root with 'su' and attempts to run 'rm -r /', which results in a warning about the danger of recursive removal on the root directory.

```
martin@debiancliente: ~
Archivo Editar Ver Buscar Terminal Ayuda
usage: sudo -h | -K | -k | -V
usage: sudo -v [-AknS] [-g group] [-h host] [-p prompt] [-u user]
usage: sudo -l [-AknS] [-g group] [-h host] [-p prompt] [-U user] [-u user]
[command]
usage: sudo [-AbEHknPS] [-r role] [-t type] [-C num] [-g group] [-h host] [-p
prompt] [-T timeout] [-u user] [VAR=value] [-i|-s] [<command>]
usage: sudo -e [-AknS] [-r role] [-t type] [-C num] [-g group] [-h host] [-p
prompt] [-T timeout] [-u user] file ...
martin@debiancliente:~$ sudo -rm -fr / --no-preserve-root
sudo: opción inválida -- 'f'
usage: sudo -h | -K | -k | -V
usage: sudo -v [-AknS] [-g group] [-h host] [-p prompt] [-u user]
usage: sudo -l [-AknS] [-g group] [-h host] [-p prompt] [-U user] [-u user]
[command]
usage: sudo [-AbEHknPS] [-r role] [-t type] [-C num] [-g group] [-h host] [-p
prompt] [-T timeout] [-u user] [VAR=value] [-i|-s] [<command>]
usage: sudo -e [-AknS] [-r role] [-t type] [-C num] [-g group] [-h host] [-p
prompt] [-T timeout] [-u user] file ...
martin@debiancliente:~$ su
Contraseña:
root@debiancliente:/home/martin# rm -r /
rm: es peligroso operar recursivamente sobre '/'
rm: utilice --no-preserve-root para saltarse esta medida de seguridad
root@debiancliente:/home/martin#
```

Rosas, Martin Luis

Comando: **\$ sudo rm -fr / --no-preserve-root**

