

# Scientific Programming in Python

## Functions

**Dr. Mohammed Hasanuzzaman**  
**Room J102, Melbourne Building (Office)**  
**e-mail: [mohammed.hasanuzzaman@cit.ie](mailto:mohammed.hasanuzzaman@cit.ie)**  
**Website: <https://mohammedhasanuzzaman.github.io>**



## Introduction to Functions

- Defining and Calling a Function
- Designing a Program to Use Functions
- Local Variables
- Passing Arguments to Functions
- Global Variables and Global Constants

# Introduction to Functions



- Most programs perform tasks that are large enough to be broken down into **several subtasks**.
- For this reason, programmers usually break down their programs into small manageable pieces of code known as functions.

**Function:** Group of statements within a program that perform a specific task

# Introduction to Functions



**Figure 3-1** Using functions to divide and conquer a large task

This program is one long, complex sequence of statements.



```
statement  
statement  
statement  
statement  
statement  
statement  
statement  
statement  
statement  
statement  
statement  
statement  
statement  
statement  
statement
```

In this program the task has been divided into smaller tasks, each of which is performed by a separate function.



```
def function1():  
    statement  
    statement  
    statement
```

function

```
def function2():  
    statement  
    statement  
    statement
```

function

```
def function3():  
    statement  
    statement  
    statement
```

function

# Benefits of Modularizing a Program with Functions



- The benefits of using functions include:
  - More organized code
  - Easier to read code
  - Code reuse
    - Write the code once and call it multiple times
  - Better testing and debugging
    - Can test and debug each function individually
  - Easier facilitation of teamwork
    - Different team members can write different functions
    - Faster development

# Defining and Calling a Function



- Function name should be **descriptive** of the task carried out by the function
  - Often includes a verb
- Function definition: specifies what a function does

```
def function_name() :  
    statement  
    statement
```

**Function header**: first line of function.

Includes keyword **def** and **function name**, followed by parentheses and colon

Under the function header will appear an **indented** block of statements that belong together as a group

**Blank lines** that appear in a block are **ignored**

# Defining and Calling a Function



- Call a function to execute it
  - When a function is called:
    - Interpreter jumps to the function and executes statements in the block
    - Interpreter jumps back to part of program that called the function
      - Known as function return

```
def helloWorld():  
    print ('hello world')  
  
helloWorld()
```

This statement  
calls the  
helloWorld  
function and  
causes it to  
execute

# Defining and Calling a Function



- It is common for a program to have a **main** function that is called when the program starts.
- main function: called when the program starts
  - Calls other functions when they are needed

```
def main():  
    helloWorld()  
    print ("GoodBye")  
  
def helloWorld():  
    print ("hello world")  
  
main()
```

Notice that the main function is called first. The main function then calls the helloWorld function.

The interpreter then returns to the main function.



# Positioning of Functions



- The following code will **not work**. It will produce the following error:
  - NameError: name 'main' is not defined
- The interpreter executes the code from top to bottom. The first instruction it encounters is to execute a function called main. However, it has not yet seen or loaded this function.
- Therefore, you should make sure that the function definition is loaded by the interpreter before it is called.

```
main()

def main():
    helloWorld()
    print ("GoodBye")

def helloWorld():
    print ("hello world")
```

# Task



- Write a program with a main function that then calls a function called squareNumbers.
- The function squareNumbers should ask the user for a number and print out the value of the number squared.

```
def squareNumbers():  
    num = int(input("Please enter a number"))  
    print (num**2)  
  
def main():  
    squareNumbers()  
  
main()
```

- Local variable: variable that is assigned a value inside a function
  - Belongs to the function in which it was created
    - Only statements inside that function can access it, error will occur if another function tries to access the variable
  
- Scope: the part of a program in which a variable may be accessed
  - The scope of a local variable is the function in which it is created

# Local Variables



```
def getName ( ) :  
    name = input("Enter your name :")  
  
def main():  
    getName()  
    print ( name )  
  
# Call the main function.  
main()
```

Line will cause an error. The variable name is not visible in the method main.

# Local Variables



Different functions may have local variables with the **same name**

—Each function does not see the other function's local variables, so no confusion

```
def main():  
    name = 'John'  
    print ('hello', name)  
    newGreeting()  
    print ('hello', name)  
  
def newGreeting():  
    name = 'Fred'  
    print ('hello', name)  
  
# Call the main function.  
main()
```

Two separate variables called name. One is local to the main and the other is local to newGreeting.

hello John  
hello Fred  
hello John

# Passing Arguments to Functions



- Notice in all the functions we have defined so far, when we call the function we give the function name and a pair of empty brackets.
- However, consider the **input** function, which we have used extensively.

```
name = input('Please enter your name')
```

- Notice when we call the input function we place some data between the open and close brackets. This data is called an argument and is passed to and used by the function we call.

# Passing Arguments to Functions




- **Argument**: piece of data that is sent into a function
  - Function can use argument in calculations
  - When calling the function, the **argument** is placed in **parentheses** following the function name
  - *functionName (argument)*
- **Parameter variable**: variable that is **assigned the value of an argument** when the function is called.
  - The parameter and the argument reference the same value
  - General format:

```
def function_name(parameter) :
```
  - **Scope of a parameter**: the function in which the parameter is used

# Passing Arguments to Functions

```
def main():  
    value = 5  
    show_double(value)  
  
def show_double(number):  
    result = number * 2  
    print(result)
```

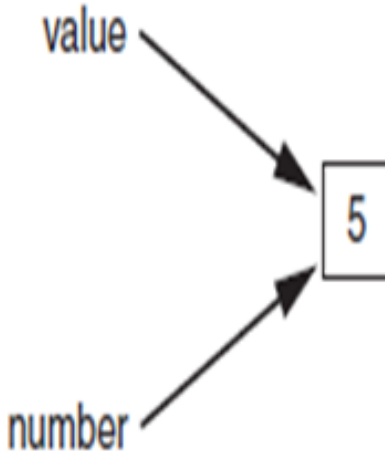

In the main function, local variable called *value* is assigned value of 5.

When the `show_double` function is called the variable *value* appears inside the parentheses. This means that *value* is being passed as an **argument** to the `show_double` function

When this statement executes, the `show_double` function will be called and the ***number* parameter will be assigned the same value as the *value* variable.**



# Passing Arguments to Functions



```
def printGreeting(name):  
    print ("Hello", name)  
  
def main():  
    name = input("Enter name: ")  
    printGreeting(name)  
  
main()
```

# Passing Multiple Arguments



- Python allows writing a function that accepts **multiple arguments**
  - Parameter list replaces single parameter
    - Parameter list items separated by comma
- Arguments are passed ***by position*** to corresponding parameters
  - First parameter receives value of first argument, second parameter receives value of second argument, etc.
- In the example on the next slide we write a function that will calculate the area of a rectangle. It will take in two parameters and print out their product.

# Passing Multiple Arguments (cont'd.)



```
def main():  
    length = int(input("Enter length of rectangle"))  
    width = int(input("Enter width of rectangle"))  
    calculateArea(length, width)
```

```
def calculateArea(recLength, recWidth):  
    print (recLength* recWidth)
```

```
main()
```

You can think of the process as the value of the argument length being copied and stored in parameter recLength. Value of width is copied to recWidth.

# Passing Multiple Arguments



```
def main():  
    firstName = input("Enter your first name:")  
    lastName = input("Enter your last name:")  
    print ("Your name reversed is")  
    reverseName(firstName, lastName)  
  
def reverseName(first, last):  
    print (last, first)  
  
# Call the main function.  
main()
```

# Mutable and Immutable data types



- In general, data types in Python can be distinguished based on whether objects of the type are mutable or immutable.
- The content of objects of immutable types cannot be changed after they are created.

Immutable
int
float
str
bool
range

# Mutable and Immutable data types



- It is important to understand that variables in Python are really just references to objects in memory. If you assign an object to a variable as shown below, this variable `num` just points to the `int` object in memory.

```
num = 10
```

- If you reassign a variable as we do with `num` below you create a ***new*** `int` object with the value 12. The variable now points to this (different) object in memory.

```
num = 10
```

```
num = 12
```

# Making Changes to Parameters



- Important: Changes made to an immutable data type parameter within the function do not affect the original argument itself
- Changes made to a mutable data type parameter will be reflected in the original argument.

```
def main():  
    userAge = 25  
    print ('User Age is ', userAge)  
  
    updateAge(userAge)  
    print ('User Age is now', userAge)  
  
def updateAge(age):  
    age+=1  
    print ('Updated Age to ', age)  
  
# Call the main function.  
main()
```

The output of the program is:

User Age is 25  
Updated Age to 26  
User Age is now 25

Notice the change made to the age variable in updateAge has no impact on the value of the userAge variable in main()



# Global Variables



- Global variable: created by assignment statement written **outside all the functions**
- Can be accessed by any statement in the program file, including from within a function

```
# Create a global variable.  
myValue = 10  
  
# The show-value function prints  
# the value of the global variable.  
def showValue():  
    print (myValue)  
  
# Call the show-value function.  
showValue()
```

# Global Variables



- Important: If a function needs to assign a value to the global variable, the global variable must be re-declared within the function
- General format: `global variable_name`

# Global Variables



```
# Create a global variable.  
myValue = 10  
  
def main():  
    showValue()  
    print (myValue)  
  
def showValue():  
    myValue = 12  
  
# Call the main function.  
main()
```

Program will just  
print out  
=10

Notice the myValue  
variable created in the  
function showValue is a  
local variable and not the  
global variable.

# Changing a Global Variable Value



```
# Create a global variable.  
myValue = 10  
  
def main():  
    showValue()  
    print ('= ', myValue)  
  
def showValue():  
    global myValue  
    myValue = 12  
  
# Call the main function.  
main()
```

Program will  
print out  
= 12

Change made  
here is made to  
the local variable  
myValue

# Content – Part 2



- Introduction to Value-returning Functions:
- Writing Your Own Value-Returning Functions
- The math Module
- Storing Functions in Modules

# Introduction to Value-Returning Functions:



- **Simple function**: group of statements within a program for performing a specific task
  - Call function when you need to perform the task
- **Value-returning function**: similar to simple function, **returns a value**
  - A value-returning function is a function that returns a value back to the part of the program that called it.
  - The value that is returned from a function can be used like any other value: it can be assigned to a variable, displayed on the screen, used in a mathematical expression (if it is a number), and so on.

# Standard Library Functions and the `import` Statement



The Python interpreter has a number of functions built into it that are always available. <https://docs.python.org/3/library/functions.html>

Built-in Functions				
<code>abs()</code>	<code>dict()</code>	<code>help()</code>	<code>min()</code>	<code>setattr()</code>
<code>all()</code>	<code>dir()</code>	<code>hex()</code>	<code>next()</code>	<code>slice()</code>
<code>any()</code>	<code>divmod()</code>	<code>id()</code>	<code>object()</code>	<code>sorted()</code>
<code>ascii()</code>	<code>enumerate()</code>	<code>input()</code>	<code>oct()</code>	<code>staticmethod()</code>
<code>bin()</code>	<code>eval()</code>	<code>int()</code>	<code>open()</code>	<code>str()</code>
<code>bool()</code>	<code>exec()</code>	<code>isinstance()</code>	<code>ord()</code>	<code>sum()</code>
<code>bytearray()</code>	<code>filter()</code>	<code>issubclass()</code>	<code>pow()</code>	<code>super()</code>
<code>bytes()</code>	<code>float()</code>	<code>iter()</code>	<code>print()</code>	<code>tuple()</code>
<code>callable()</code>	<code>format()</code>	<code>len()</code>	<code>property()</code>	<code>type()</code>
<code>chr()</code>	<code>frozenset()</code>	<code>list()</code>	<code>range()</code>	<code>vars()</code>
<code>classmethod()</code>	<code>getattr()</code>	<code>locals()</code>	<code>repr()</code>	<code>zip()</code>
<code>compile()</code>	<code>globals()</code>	<code>map()</code>	<code>reversed()</code>	<code>__import__()</code>
<code>complex()</code>	<code>hasattr()</code>	<code>max()</code>	<code>round()</code>	
<code>delattr()</code>	<code>hash()</code>	<code>memoryview()</code>	<code>set()</code>	

# Standard Library Functions and the `import` Statement



- Standard library: library of pre-written functions that comes with Python (<https://docs.python.org/3/library/>)
  - *Library functions* perform tasks that programmers commonly need
    - Viewed by programmers as a “black box”

**Figure 6-1** A library function viewed as a black box

---





- The functions in the **standard library** are stored in files that are known as **modules**.
  - For example, functions for performing math operations are stored together in a module, functions for working with files are stored together in another module, and so on.
- In order to call a function that is stored in a module, you have to write an **import statement** at the top of your program.
- An import statement tells the interpreter the name of the module that contains the function.
- Format: ***import module\_name***

# Dot Notation



- If within our program we want to call a method from an imported module we can use dot notation.
- Dot notation: notation for calling a function belonging to a module
- Format: ***module\_name.function\_name()***

# Using the random module



- random module: includes library functions for working with random numbers
- To use these functions we must first import the random module by including an import statement at the top of our class.
  - This statement causes the interpreter to load the contents of the random module into memory.
  - This makes all of the functions in the random module available to your program

```
import random
```

# Using the random module



- The first function we will examine is named *randint*.
- randint function: generates a random number in the range provided by the arguments
  - Returns the random number to the part of program that called the function
  - Returned integer can be used anywhere that an integer would be used


```
number = random.randint(1, 100)
```

- Notice that two arguments appear inside the parentheses: 1 and 100.
- These arguments tell the function to return an integer random number in the range of 1 through 100.

# Using the random module



- This method returns a value. We can assign this value to a variable (see below)
- The number that is returned will be assigned to the *number* variable

A curved arrow originates from the right side of the code line and points to the variable 'number', indicating that the value returned by the function is assigned to this variable.

```
number = random.randint(1, 100)
```

# Value Returning Function



```
surname = input("Please input your surname");
```

# The `math` Module



- `math` module: part of standard library that contains basic functions that are useful for performing mathematical calculations
- Typically accept one or more values as arguments, perform mathematical operation, and return the result
- Use of module requires an `import math` statement

# The math Module (cont'd.)



**Table 6-2** Many of the functions in the `math` module

<b>math</b> Module Function	Description
<code>acos(x)</code>	Returns the arc cosine of <code>x</code> , in radians.
<code>asin(x)</code>	Returns the arc sine of <code>x</code> , in radians.
<code>atan(x)</code>	Returns the arc tangent of <code>x</code> , in radians.
<code>ceil(x)</code>	Returns the smallest integer that is greater than or equal to <code>x</code> .
<code>cos(x)</code>	Returns the cosine of <code>x</code> in radians.
<code>degrees(x)</code>	Assuming <code>x</code> is an angle in radians, the function returns the angle converted to degrees.
<code>exp(x)</code>	Returns $e^x$
<code>floor(x)</code>	Returns the largest integer that is less than or equal to <code>x</code> .
<code>hypot(x, y)</code>	Returns the length of a hypotenuse that extends from (0, 0) to ( <code>x</code> , <code>y</code> ).
<code>log(x)</code>	Returns the natural logarithm of <code>x</code> .
<code>log10(x)</code>	Returns the base-10 logarithm of <code>x</code> .
<code>radians(x)</code>	Assuming <code>x</code> is an angle in degrees, the function returns the angle converted to radians.
<code>sin(x)</code>	Returns the sine of <code>x</code> in radians.
<code>sqrt(x)</code>	Returns the square root of <code>x</code> .
<code>tan(x)</code>	Returns the tangent of <code>x</code> in radians.



# Math Module Example



```
import math

def main():

    a = int(input('Enter the length of side A: '))
    b = int(input('Enter the length of side B: '))

    # Calculate the length of the hypotenuse.
    c = math.hypot(a, b)

    # Display the length of the hypotenuse.
    print ('The length of the hypotenuse is ' , c)

main()
```

# The `math` Module (cont'd.)



- The `math` module defines constants `pi` and `e`, which are assigned the mathematical values for  $\pi$  and  $e$ 
  - Can be used in equations that require these values, to get more accurate results
- Variables must also be called using the dot notation
  - Example:

```
circle_area = math.pi * radius**2
```

# Writing Your Own Value-Returning Functions



- We will now look at writing our own value-returning functions in the same way that you write a simple function, with one exception: a value-returning function must have a return statement.
- Here is the general format of a value-returning function definition in Python:

```
def function-name ( ):
    statement
    statement
    etc.
    return expression
```

# Writing Value-Returning Methods



- Following is a simple example of a sum method:

```
def main():  
    total = sum(12, 3)  
    print ("Sum is", total)  
  
def sum(num1, num2):  
    result = num1+num2  
    return result  
  
main()
```

A red arrow originates from the 'sum' argument in the function call 'sum(12, 3)' within the 'main' function and points diagonally down and to the left towards the 'def sum' function definition, illustrating the call to the value-returning method.

# Returning Boolean Values



- Boolean function: returns either `True` or `False`
  - Normally used to test a condition such as for decision and repetition structures
    - Common calculations, such as whether a number is even, can be easily repeated by calling a function

# Boolean Example



```
def isEven(number):  
    if (number % 2) == 0:  
        status = True  
    else:  
        status = False  
    return status  
  
def main():  
    number = 122  
    answer = isEven(number)  
    print ("Is even is ", answer)  
  
main()
```

# Boolean Example



```
def isEven(number):  
    if (number % 2) == 0:  
        return True  
    else:  
        return False
```

```
def main():  
    number = 122  
    answer = isEven(number)  
    print ('Is even is ', answer)
```

```
main()
```

Notice isEven has multiple return statements but only one can ever be executed.

You should make sure that there is no path that allows the function to finish without returning a value.

# Boolean Example



```
def isEven(number):  
    return ( (number % 2) == 0 )
```

```
def main():  
    number = 122  
    answer = isEven(number)  
    print ('Is even is ', answer)
```

```
main()
```

Notice in this variant the expression inside the brackets evaluates to either True or False and this value is returned.



# Returning Multiple Values



- In Python, a function can return multiple values
  - Specified after the return statement separated by commas
    - Format: `return expression1, expression2, etc.`
  - When you call such a function in an assignment statement, you need a separate variable on the left side of the = operator to receive each returned value

```
def getName():  
    first = input( 'Enter your first name:' )  
    last = input( 'Enter your last name: ' )  
    return first, last  
  
def main():  
    firstName, lastName = getName()  
    print ("First Name: ", firstName, " Second Name: ", lastName)  
  
main()
```

# Storing Functions in Modules



- In large, complex programs, it is important to keep code organized
- **Modularization**: grouping related functions in modules
  - Makes program easier to understand, test, and maintain
  - Make it easier to reuse code for multiple different programs
- Module is a file that contains Python code
  - Contains function definition but does not contain calls to the functions
    - Importing programs will call the functions
- Rules for module names:
  - File name should end in `.py`
  - Cannot be the same as a Python keyword
- Import module using `import` statement in the normal way

# Storing Functions



- Example: Module called rectangle.py

```
def area(width, length):  
    return width * length  
  
def perimeter(width, length):  
    return 2 * (width + length)
```

# Storing Functions



```
import rectangle
```

```
def main():
```

```
    sideA = 12;
```

```
    sideB = 10;
```

```
    recArea = rectangle.area(sideA, sideB)
```

```
    print (recArea)
```

```
main()
```

# Programming Task A



- Write a method that will ask a user for their age and return the value.
- Write another method that takes in a single int parameter and returns true if the int parameter is greater than 18 or false if it is less than 18.
- Using the above methods write a program that will ask a user for their age and will inform the user if they are over 18 or not

# Programming Task B



- Part A
  - Write a program that will generate two random numbers between 1 and 100.
  - Write a function that will return the sum of the two numbers.
  - Write a function that will ask the user to guess the value and will return the guessed value.
  - The program should then print out a message indicating if the user has guessed correctly or not.
  
- Part B
  - Make this program iterative. Allow the user to continue until they chose to exit.

```
def getAge() :  
    age = int(input("Please input your age"))  
    return age
```

```
def validateAge(userAge) :  
    if(userAge>=18):  
        return True  
    else:  
        return False
```

```
def main() :  
    age = getAge();  
    isValidAge = validateAge(age)  
  
    print ('User valid age = ', isValidAge)
```

```
main()
```

```
import random

def main():
    numberA = random.randint(1, 100)
    numberB = random.randint(1, 100)
    result = sum(numberA, numberB)
    guess = askUser(numberA, numberB)
    if (result == guess):
        print ("Correct")
    else:
        print ("Incorrect")

def sum(num1, num2):
    return num1+num2

def askUser(num1, num2):
    guess = int(input("What is the sum of the following numbers: "+str(num1)+" + "+str(num2)))
    return guess

main()
```



```
import random

def main():
    continueGame = 'y'
    while continueGame == 'y':
        numberA = random.randint(1, 100)
        numberB = random.randint(1, 100)
        result = sum(numberA, numberB)
        guess = askUser(numberA, numberB)
        if (result == guess):
            print ("Correct")
        else:
            print ("Incorrect")
        continueGame = input("Would you like to continue y/n")

def sum(num1, num2):
    return num1+num2

def askUser(num1, num2):
    guess = int(input("What is the sum of the following numbers: "+str(num1)+" + "+str(num2)))
    return guess

main()
```