
Data Annotation for NLP tasks

**Ukrainian Catholic University
Lviv, 2025**

Would you like to add more details or make it
look more personal?



Український
Католицький
Університет



Dmytro Chaplynskyi

Developer, 20+ years of commercial experience; 15 years with Python.

10 years in the field of Ukrainian language processing (NLP); co-organizer of the LANG-UK public initiative. Author/co-author of 10+ articles over the last 3 years, including on the UberText 2.0 and NER UK 2.0 corpora.

Working on creating datasets, LLMs and machine translation.

Second-year graduate student at the Ukrainian Catholic University.

Cursed questions

01

What

is “data annotation” in
NLP?

02

Why

do we annotate data
(what is the benefit)?

03

Do you have

any experience with
annotation?

04

How

would you organize the
annotation process?

05

Чому

заплакані очі


06

Куди

подівся Пес Патрон?


What is data annotation (in general)

- Data annotation is a process in which we make implicit information explicit based on human or machine knowledge.
- Sources of “intelligence”: people (experts/crowds) and machines (models trained on previous experience).
- Goal: to visualize and extract hidden knowledge in a structured way for further use (model training, search, analytics).
- Data sources: text/images/audio (any modalities).
- A single object can have several layers of annotation: POS, NER, sentiment, relationships between elements, etc.

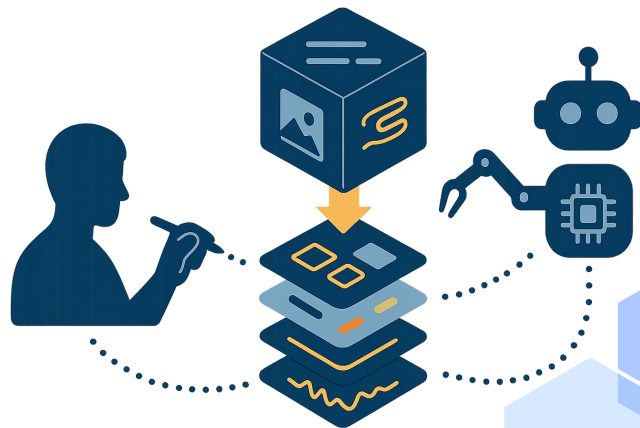

Why do we annotate data? (Purpose)

- To capture experience/knowledge in a structured form for future reuse.
- Quality assessment (validation/testing on independent datasets).
- In practice, both aspects often coexist (annotations for training and evaluation in a split dataset).
- Model training (building supervised/semi-supervised solutions).
- Evaluation example: FLORES — a small but multilingual set of parallel translations (200+ languages), typically used for independent MT quality measurement rather than training.

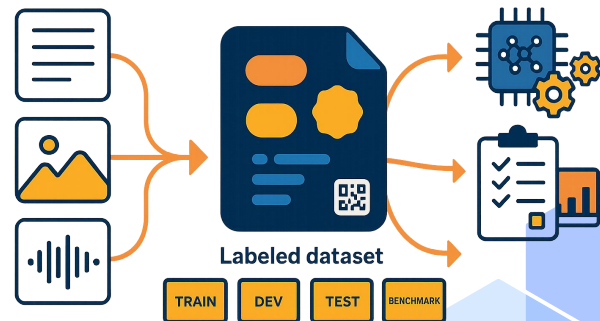

Why create annotated datasets?

- A well-designed, well-structured, and clearly described dataset is a valuable contribution and the basis for a strong publication.
- Key: reproducibility and methodology (clear annotation instructions, protocol descriptions, quality control, consistency between annotators).
- Other teams often replicate the approach for their languages/domains.
- Such works are usually well cited: the data remains useful for many years and becomes a reference set.
- Data created and documented “once correctly” is reused multiple times in different studies and languages



My experience with data annotation

NER UK 1.0

the first Ukrainian dataset for named entity recognition; text source — BRUK (Brown Ukrainian Corpus); **4 tags**: *PER, LOC, ORG, MISC*.

Translation Quality

manually annotated dataset for assessing the quality of **EN→UK** translations on a scale of 0–100; expert assessments, further proofreading; suitable for calibrating automatic metrics.

NER UK 2.0

Updated version (last year), volume ~**twice as large**; texts from “Nashi Groshi” added; expanded to **13 tags**; old version re-annotated.

Sentiment Vocab

publicly released; used in research/projects “ ”





Dmytro Chaplynskyi

Other names ▶

lang-uk initiative

Verified email at ucu.edu.ua

[nlp](#) [open data](#)


FOLLOWING



	CITED BY	YEAR
☐ Introducing UberText 2.0: A corpus of Modern Ukrainian at scale D Chaplynskyi Proceedings of the Second Ukrainian Natural Language Processing Workshop ...	42	2023
☐ Contextual embeddings for Ukrainian: A large language model approach to word sense disambiguation Y Laba, V Mudryi, D Chaplynskyi, M Romanyshyn, O Dobosevych Proceedings of the Second Ukrainian Natural Language Processing Workshop ...	19	2023
☐ Introducing NER-UK 2.0: A Rich Corpus of Named Entities for Ukrainian D Chaplynskyi, M Romanyshyn Proceedings of the Third Ukrainian Natural Language Processing Workshop ...	10	2024
☐ Learning word embeddings for Ukrainian: A comparative study of fastText hyperparameters N Romanyshyn, D Chaplynskyi, K Zakharov Proceedings of the Second Ukrainian Natural Language Processing Workshop ...	9	2023
☐ From Under A Kiulia arXiv preprint		
☐ Setting up the Data Printer with Improved English to Ukrainian Machine Translation Y Paniv, D Chaplynskyi, N Trynus, V Kyrylov arXiv preprint arXiv:2404.15196	5	2024

Cited by

	All	Since 2020
Citations	96	96
h-index	5	5
i10-index	3	3

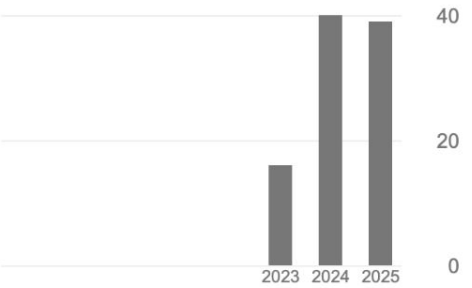

Co-authors

[EDIT](#)



Mariana Romanyshyn
Computational linguist, Grammarly



Volodymyr Kurukov

ana



olic ...



Oles Dobosevych
Ukrainian Catholic University



Volodymyr Mudryi
Ukrainian Catholic University



A picture is worth a thousand words

How to organize the annotation process

For small pilots, simple tools are sufficient: Google Docs/Sheets or even Google Forms

Disadvantages: poor scalability, lack of built-in quality control, difficult to track errors/versions/statistics.

Conclusion: for a high-quality/academic level, the main thing is to formalize the **methodology first**, rather than choosing software.

The **methodology** should describe: source of data, goals, labeling scheme, instructions with examples, QA/IAA procedures, versioning, and change procedures



Methodology

Why?

it provides order and consistency so that everyone does the same thing

- Goal and Objective
- Annotation Scheme
- Data Source
- How We Annotate

When?

write before starting, update during work (save versions).

What

should be included at a minimum?

- Team and Roles
- Quality Assurance
- Scope and Deadlines
- Changes Tracking

After completion: keep the document “live” and add it to the final materials.

Annotation team

Who annotates: the researcher alone or an extended team (students, volunteers, colleagues, paid annotators).

Why a team: human error, “tired eyes,” fatigue; mutual checks are necessary.

Roles: coordinator (organizes the process), editor(s) (handles complex cases, updates methodology, resolves discrepancies).

Number: preferably odd (3 or more) so that the majority rule works without constant intervention.

Assignment of tasks: might be random; it is better to give the same objects to 2–3 annotators to compare decisions.

Qualifications: sometimes marked by subject matter experts, even if the dataset is collected by another team.

Error prevention: short training sessions, calibration sessions



Tips & Tricks



Communication channel: work chat for quick questions and complex cases.

Single “source of truth”: one annotation instruction (living document), updates visible to everyone.

Gamification: leaderboard, intermediate goals, small prizes/badges for top contributors.

Preliminary annotation by models: classic/LLM make a draft; people correct or discard them

Annotator action logs: time spent on tasks, number of edits, night sessions and suspiciously fast annotations.

Pace hygiene: limits on tasks a day, breaks — less fatigue and decision drift.

Decision log: briefly record controversial cases and accepted rules — to not to “reinvent the wheel.”

Inter Annotator Agreement (IAA)

What it is: consistency of decisions between annotators on the same objects, an indicator of data reliability and instruction quality.

Pairwise (2 annotators):

- **% agreement:** In short: proportion of matches; sensitive to imbalance.

$$P_o = \frac{1}{N} \sum_{i=1}^N \mathbf{1}(y_i = z_i)$$

- **Cohen's kappa (κ):** Takes into account random matches; there is a weighted version for ordinal scales.

$$\kappa = \frac{p_0 - p_e}{1 - p_e},$$

$$p_e = \frac{1}{N^2} \sum_k n_{k1} n_{k2}$$

More than 2 annotators:

- **Fleiss' kappa:** For nominal labels, $k \geq 2$ annotators.

$$\kappa = \frac{\bar{P} - \bar{P}_e}{1 - \bar{P}_e} \quad \bar{P} = \frac{1}{N} \sum_{i=1}^N P_i$$
$$= \frac{1}{Nn(n-1)} \left[\sum_{i=1}^N \sum_{j=1}^k (n_{ij}^2) - Nn \right]$$

$$\bar{P}_e = \sum_{j=1}^k p_j^2$$

- **Krippendorff's alpha (α):** Works with omissions and different scales; Do/De — observed and expected “disagreement” (the distance is set by the rules of the task).

$$\alpha = 1 - \frac{D_o}{D_e} \quad D_o = \frac{1}{n} \sum_{j=1}^N m_j \mathbb{E}(\delta_j) \quad D_e = \frac{1}{P(n, 2)} \sum_{c \in R} \sum_{k \in R} \delta(c, k) P_{ck}$$

Tools, pt. 1



Doccan is an open-source text annotation tool for humans. It provides annotation features for text classification, sequence labeling, and sequence to sequence tasks. You can create labeled data for sentiment analysis, named entity recognition, text summarization, and so on.

Python. Can be deployed with **Docker**



Label Studio is an open source data labeling tool. It lets you label data types like audio, text, images, videos, and time series with a simple and straightforward UI and export to various model formats. It can be used to prepare raw data or improve existing training data to get more accurate ML models.

Python. Can be deployed with **Docker**

Tools, pt. 2



Argilla is a collaboration tool for AI engineers and domain experts who need to build high-quality datasets for their projects.

Python

Can be deployed on **HuggingFace Spaces**.



Prodigy is a modern annotation tool for creating training and evaluation data for machine learning models. You can also use Prodigy to help you inspect and clean your data and do error analysis.

Integration with **SpaCy**, free academic licenses, **Python**.

Tools pt. 3: Vulyk

THE VULYK

- × Був розроблений у підвалах Канцелярської сотні
- × Є фреймворком для краудсорсінгу
- × Можна додати будь який тип завдання, розробивши невеличкий плагін
- × Написан на Python/Flask/Mongo, open source





Vulyk: crowdsourcing platform

Інструкція

Завдання

Топ-10 волонтерів

Logout

Опрацював всього: 1 Позиція у рейтингу: 3

- 1 Одіозний український тенор Володимир Гришко вкотре опинився у центрі скандалу ПЕРС
- 2 Тенор поскаржився на те, що львівська громада змусила його відмовитись від концерту у Львівській філармонії, оскільки напередодні розгону ЛОК
- 3 Євромайдану Гришко виступив на Антимайдані ОРГ ПЕРС
- 3 А у випадку, якби Гришко таки не скасував концерт, львів'яни пообіцяли влаштувати акцію протесту біля філармонії ПЕРС
- 4 Згодом не відбувся концерт народного артиста у Трускавці ЛОК
- 5 Обурення pana Гришка виглядає щонайменше дивно, адже після тодішнього скасування концерту тенор, чи то з переляку, чи з ввічливості, заповнив ПЕРС
- кореспондента « ВЗ » ОРГ, що позицію львів'ян підтримує

Vulyk NER tagging (based on BRAT)

Vulyk on MT Direct Assessment task

 Vulyk: crowdsourcing platform

Manual Tasks Top 10 Logout

Processed 15 Rating position: 24

Evaluate Translation

English: We can also do custom-made straps, end fittings according to your requests.

Ukrainian: Ми також можемо виготовити на замовлення ремені, торцеві фітинги відповідно до ваших запитів.

Rate the translation (0-100):



0 10 20 30 40 50 60 70 80 90 100


- ☐ Inappropriate content (sexual, harassment, hate speech) [i]
- ☐ Unintelligible content (the English sentence is gibberish) [g]

Skip task Submit

FiftyFiveShades use case

en	19: Before recording audio
uk	21: Перед записуванням звуку
en	20: Other games like Gun Master Onslaught 1
uk	22: Інші ігри , як Гармата Майстер Натиск 1
en	21: HD + In [redacted] photo
uk	23: HD + B [redacted] фото

CLASSIFIED

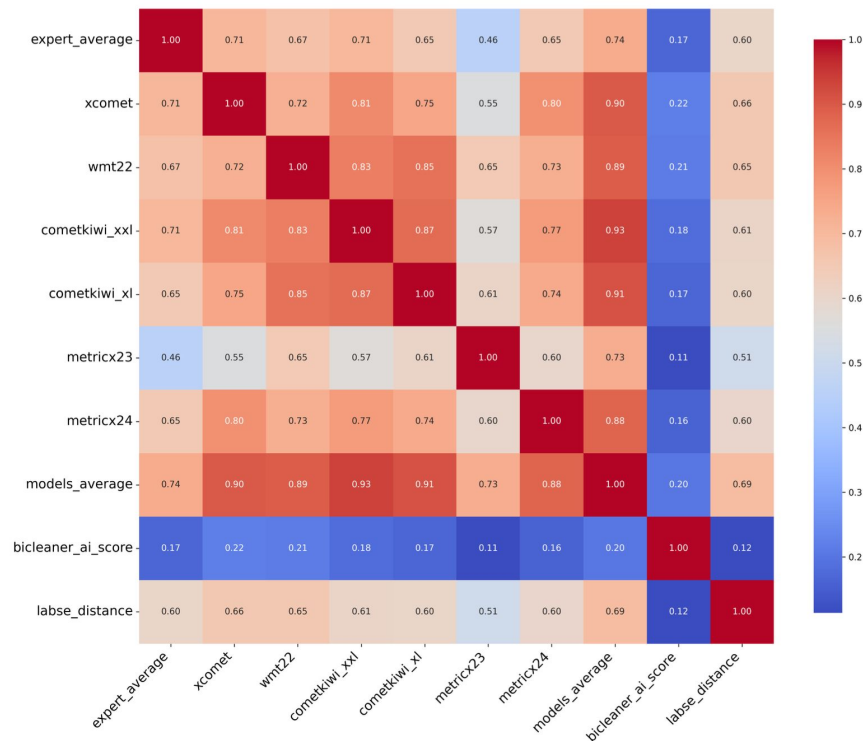

Label Studio, installation

Quick start

1. Install Label Studio:

```
pip install label-studio
```

bash 

2. Start Label Studio


```
label-studio start
```

bash 

3. Open Label Studio at `http://localhost:8080`.

https://labelstud.io/guide/quick_start

Label Studio, QuickStart

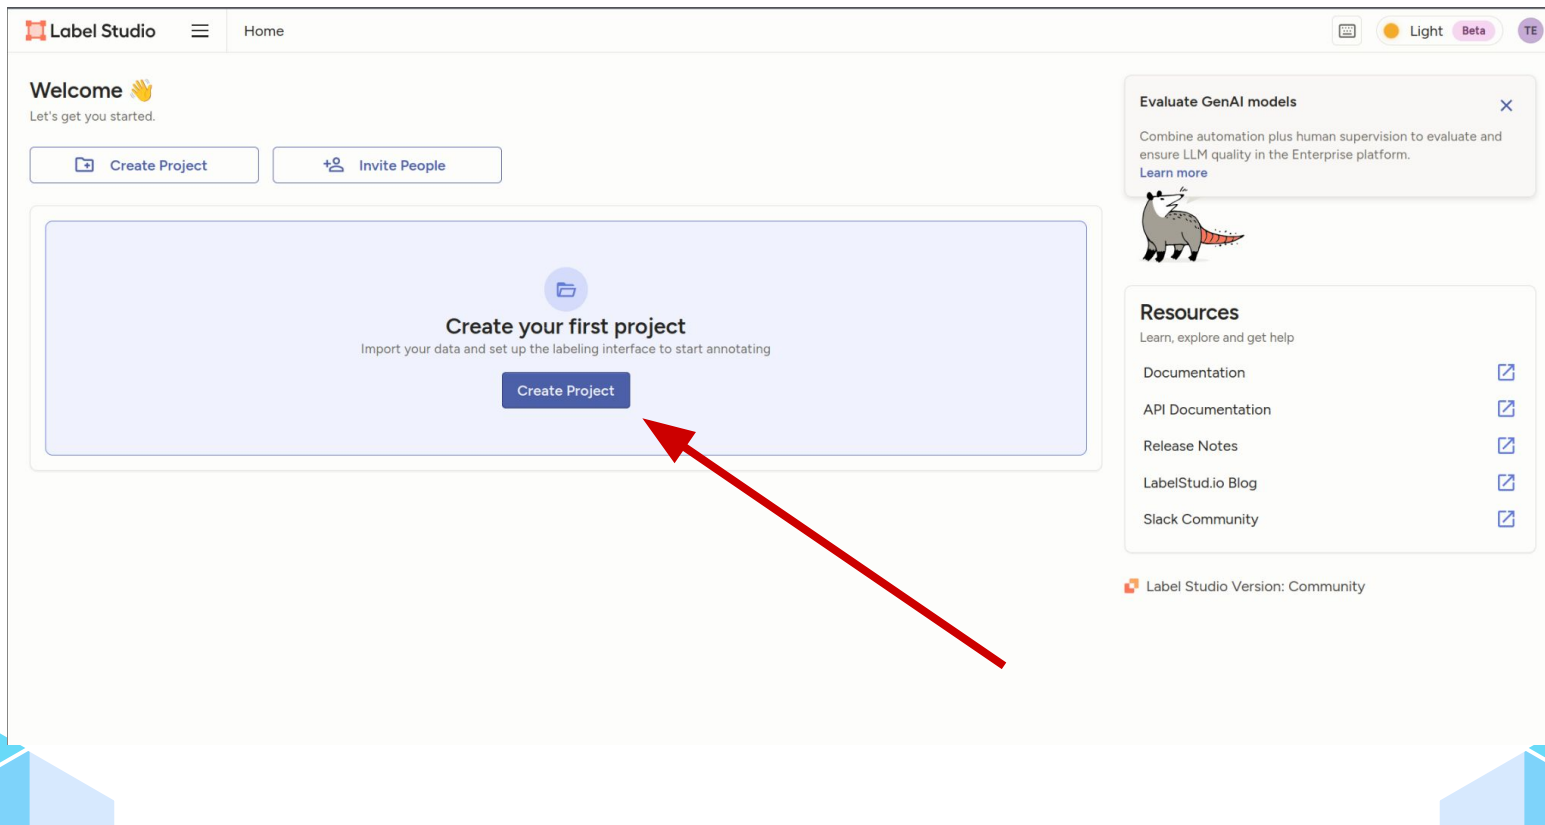

The screenshot shows the Label Studio web application interface. At the top, there is a navigation bar with the 'Label Studio' logo, a hamburger menu, and the 'Home' page indicator. On the right side of the header, there are icons for chat, theme selection (Light, Beta, TE), and a user profile icon.

The main content area features a 'Welcome' message with a hand icon and the text 'Let's get you started.' Below this, there are two buttons: 'Create Project' and 'Invite People'. The central focus is a large light blue box titled 'Create your first project' with the subtitle 'Import your data and set up the labeling interface to start annotating'. Inside this box is a 'Create Project' button, which is highlighted by a red arrow pointing from the bottom right.

On the right side of the interface, there are two sidebars. The top sidebar is titled 'Evaluate GenAI models' and includes a close button (X), a description about combining automation with human supervision, and a 'Learn more' link. Below this is a cartoon illustration of a dog. The bottom sidebar is titled 'Resources' and lists links for 'Documentation', 'API Documentation', 'Release Notes', 'LabelStud.io Blog', and 'Slack Community', each with an external link icon. At the very bottom right, it states 'Label Studio Version: Community'.

Label Studio, Setting Up Project

Create Project

Project Name

Data Import

Labeling Setup

Cancel

Save

Project Name

Awesome Ukrainian NLP Contribution

Description

Optional description of your project

Workspace

Enterprise

Select an option

Simplify project management by organizing projects into workspaces. [Learn more](#)

Did you know?

×

You can control access to specific projects and workspaces for internal team members and external annotators using Label Studio Enterprise. [Learn more](#)



Label Studio, Importing Data

Create Project

Project Name

Data Import

Labeling Setup

Cancel

Save

Dataset URL

Add URL

 or

⬆

 Upload More Files

3 files uploaded

Files

upload/1/70d95c79-photo_2025-07-25_14-58-58.jpg		131.38 KB
upload/1/ac7ea427-GXuoc0OWQAAoBW0.png		367.15 KB
upload/1/0fc0dad1-3нїм0к_20240630_140714.png		1.23 MB

Label Studio, Setting Labelling UI

Create Project

Project Name

Data Import

Labeling Setup

Cancel

Save

Computer Vision

Natural Language Processing

Audio/Speech Processing

Conversational AI

Ranking & Scoring

Structured Data Parsing

Time Series Analysis

Videos

Generative AI

Custom template

Please read the passage

The boundary of the region from which no escape is possible is called the event horizon. Although crossing the event horizon has enormous effect on the fate of the object crossing it^[1], it appears to have no locally detectable features.

Select a text span answering the following question:
How can black holes be detected?

Question Answering

To have faith is to trust yourself to the water.

Choose text sentiment

☒ Positive^[1] ☐ Negative^[2] ☐ Neutral^[3]

Text Classification

Person^[1] Fact^[2] Date^[3] Time^[4] Ordinal^[5] Product^[6] Lang

Opossums^[1] are usually solitary^[2] and nomadic, staying in one area as food and water are easily available. Some families will group together in ready burrows or even under houses. Though they will temporarily occupy abandoned they do not dig or put much^[3] effort into building their own. As nocturnal they favor dark, secure areas. These^[4] areas may be below ground or above threatened or harmed, they will "play possum", mimicking the appearance of sick or dead animal^[5]. This physiological response is involuntary (like faint) than a conscious act. In the case of baby opossums, however, the brain does react this way at the appropriate moment, and therefore they often fall to "play when threatened^[6]".

Named Entity Recognition

To have faith is to trust yourself to the water.

Opossum x Extraterrestrial x

☐ Bacteria
☐ Eukarya
☐ Human
☒ Opossum
☒ Extraterrestrial

Taxonomy

I voted for Obama^[1] because he^[2] was...

Relation Extraction

Please read the passage

This has been applied mainly for text. Abstractive methods build an internal semantic representation of the original content, and then use this representation to create a summary that is closer to what a human might express. Abstraction may transform the extracted content by paraphrasing sections of the source document, to condense a text more strongly than extraction. Such transformation, however, is computationally much more challenging than extraction.

Provide one sentence summary:

There are two approaches to automatic summarization: extraction and abstraction. In extraction summarization content is extracted from the original data, whereas Abstraction may transform the extracted content by

Text Summarization

If I'm curt with you, it's because time is a factor. I think fast, I talk fast, and I need you two guys to act fast if you want to get out of this.

☐ Toxic^[1]
☐ Severely Toxic^[2]
☐ Obscene^[3]
☒ Threat^[4]
☐ Insult^[5]

Please provide additional comments

Read the sentence in English:

The Sun is the star at the center of the Solar System. It is a massive, nearly perfect sphere of hot plasma, heated to incandescence by nuclear fusion reactions in its core, radiating the energy from its surface mainly as visible light and infrared radiation with 10% at ultraviolet energies. It is by far the most important source

Provide translation in Spanish:

El Sol es la estrella en el centro del Sistema Solar. Es una esfera masiva, casi perfecta, de plasma caliente, calentada hasta la incandescencia por reacciones de fusión nuclear en su núcleo, irradiando la energía de su superficie principalmente como luz visible y radiación infrarroja con un 10% de energía ultravioleta. Es, con diferencia, la

Label Studio, Setting Labelling UI

Create Project

Project Name

Data Import

Labeling Setup

Cancel

Save

Computer Vision >

Natural Language Processing >

Audio/Speech Processing >

Conversational AI >

Ranking & Scoring >

Structured Data Parsing >

Time Series Analysis >


Videos >

Generative AI >

Custom template




Keypoint Labeling

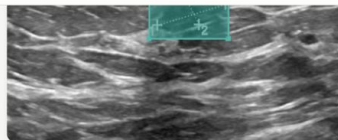

Medical Image Classification with Bounding Boxes




Inventory Tracking

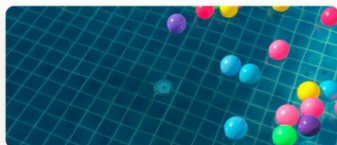

Please answer the question:

Q1 Are there an equal number of colors? A1 |

Visual Question Answering

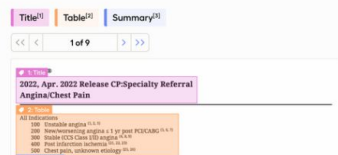

2022, Apr. 2022 Release CP-Specialty Referral Angina/Chest Pain

Multi-page document annotation


Regions
panda bear holding something^[1]
trees behind the panda^[2]
piece of bamboo in panda's paw^[3]

Attributes
marking is black^[4]
nose is black^[5]
face is round^[6]

Relationships
hole ON log^[7]
tree BEHIND bear^[8]
mouth OF panda^[9]



Visual Genome

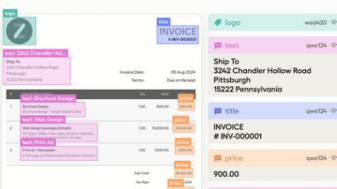

Describe the image:

Label Studio, Editing Interface

Create Project

Project Name

Data Import

Labeling Setup

Cancel

Save

Labeling Interface

Browse Templates

Code

Visual

Configure data

Use image from

< set manually >

\$captioning

Configure settings

Width of region borders

1

☐ Allow image zoom (ctrl+wheel)

☐ Show controls to zoom in and out

☐ Show controls to rotate image

UI Preview



Describe the image:

Label Studio, Setup UI Through Code

Create Project

Project Name

Data Import

Labeling Setup

Cancel

Save

Labeling Interface

Browse Templates

Code

Visual


```
1 <View>
2   <Image name="image" value="$captioning"/>
3   <Header value="Опишіть зображення:"/>
4   <TextArea name="caption" toName="image" placeholder="Enter description
5     rows="5" maxSubmissions="1"/>
6 </View>
7
```

UI Preview



Опишіть зображення:


Label Studio, Start Labelling!

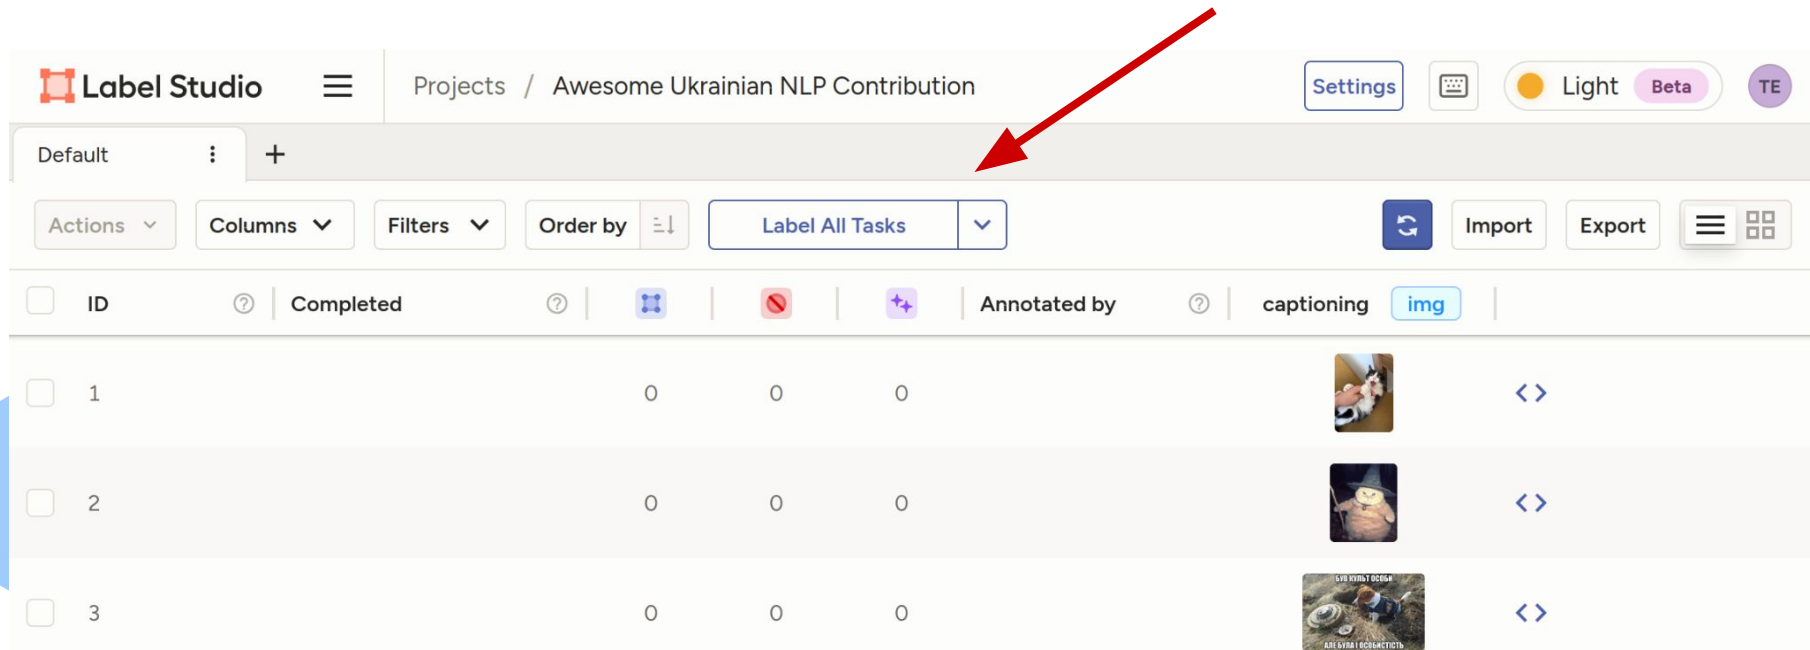

The screenshot displays the Label Studio web interface. At the top, the 'Label Studio' logo is on the left, and the project name 'Awesome Ukrainian NLP Contribution' is in the center. On the right, there are buttons for 'Settings', 'Light' theme, 'Beta' status, and a user profile 'TE'. Below the project name, a toolbar contains buttons for 'Actions', 'Columns', 'Filters', 'Order by', and a prominent 'Label All Tasks' button with a dropdown arrow. A red arrow points to this button. To the right of the toolbar are buttons for 'Import', 'Export', and view toggles. The main area is a table with columns: 'ID', 'Completed', three status icons (blue square, red circle with slash, purple plus), 'Annotated by', and a preview column. The preview column shows image thumbnails and a '<>' button. Three tasks are listed in the table.

ID	Completed				Annotated by	captioning
1	0	0	0			 <>
2	0	0	0			 <>
3	0	0	0			 <>

Label Studio, Labelling Interface

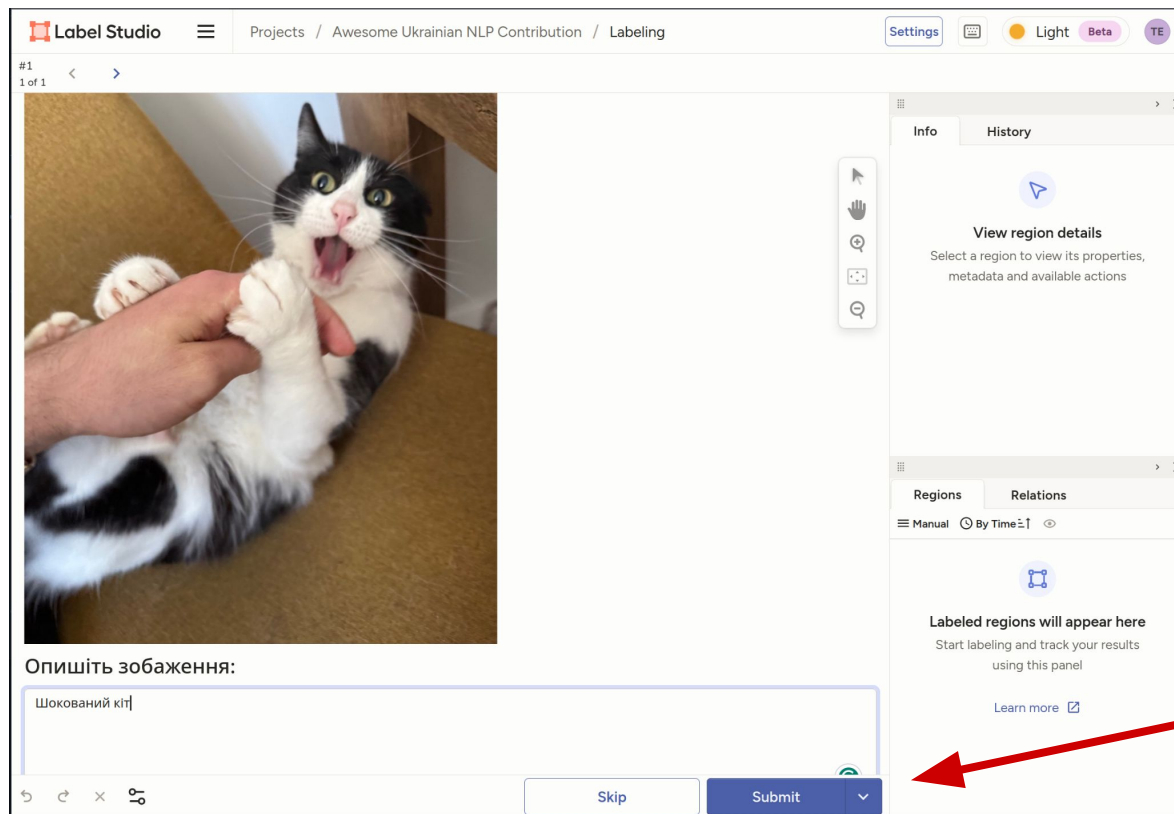

Label Studio, ML Backends



Label Studio  Projects / Awesome Ukrainian NLP Contribution / Settings

General

- Labeling Interface
- Annotation
- Model
- Predictions
- Cloud Storage
- Webhooks
- Danger Zone

General Settings

Project Name

Awesome Ukrainian NLP Contribution

Description

Workspace  Enterprise

Select an option

Simplify project management by organizing projects into workspaces. [Learn more](#)

Color

☐ ☒ ☐ ☐ ☐ ☐ ☐ ☐

Task Sampling

☒ **Sequential sampling**
Tasks are ordered by Task ID

☐ **Random sampling**
Tasks are chosen with uniform random

Label Studio, ML Backends

Connect Model ×

Name Required

Backend URL Required

Select authentication method

No Authentication ▼

Any extra params to pass during model connection

☐ **Interactive preannotations**
If enabled some labeling tools will send requests to the ML Backend interactively during the annotation process.

Validate and Save



Label Studio, ML Backends

MODEL_NAME	Description	Pre-annotation	Interactive mode	Training	Required parameters
segment_anything_model	Image segmentation by Meta	✗	✓	✗	None
llm_interactive	Prompt engineering with OpenAI , Azure LLMs.	✓	✓	✓	OPENAI_API_KEY
grounding_dino	Object detection with prompts. Details	✗	✓	✗	None
tesseract	Interactive OCR. Details	✗	✓	✗	None
easyocr	Automated OCR. EasyOCR	✓	✗	✗	None
spacy	NER by SpaCy	✓	✗	✗	None
flair	NER by flair	✓	✗	✗	None
bert_classifier	Text classification with Huggingface	✓	✗	✓	None
huggingface_llm	LLM inference with Huggingface	✓	✗	✗	None

Label Studio, Pros and Cons

Pros

- **A lot of prebuilt templates**
- **A lot of supported tasks**
- **Clean UI**

Cons

- **Active Learning is locked under Enterprise license**
- **No Free Annotator Agreement Tools**
Annotator agreement features locked under Enterprise license
- **Hypothesis**

Argilla, QuickStart

Quickstart

Argilla is a free, open-source, self-hosted tool. This means you need to deploy its UI to start using it. There are two main ways to deploy Argilla:

🤖 Deploy on the Hugging Face Hub

The **recommended choice to get started**. You can get up and running in under 5 minutes and don't need to maintain a server or run any commands.

No-code Python SDK

If you're just getting started with Argilla, click the deploy button below:

 **Deploy on HF Spaces**

You can use the default values following these steps:

- Leave the default Space owner (your personal account)
- Leave `USERNAME` and `PASSWORD` secrets empty since you'll sign in with your HF user as the Argilla Space owner.
- Click create Space to launch Argilla 🚀.
- Once you see the Argilla UI, go to the Sign in into the Argilla UI section. If you see the `Building` message for longer than 2-3 min refresh the page.

Argilla, Importing Data

The screenshot displays the Argilla web interface. At the top, a dark header bar contains a 'Home' link and a red circular profile icon with the letters 'RO'. Below the header, a yellow warning banner states: 'Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)'. A red arrow points from the title 'Argilla, Importing Data' to this banner. The main content area is titled 'Your datasets' and shows 'None yet'. On the left, a card titled 'Import a dataset from Hugging Face Hub' provides instructions and an 'Import dataset' button. On the right, two buttons are visible: 'Import dataset from Hugging Face' (highlighted by the red arrow) and 'Import from Python'. Below these, a section titled 'Don't know where to start?' lists example datasets: 'stanfordnlp/imdb' (Text Classification, sentiment-classification, 100K rows), 'databricks/databricks-dolly-15k' (Question answering, instruction-dataset, rag, 15K rows), and 'dvilasuero/finepersonas-v0.1-tiny-flux-schnell' (Text to Image, synthetic, rlaif, 350 rows).

Home RO

⚠ Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)

Your datasets

None yet

Import a dataset from Hugging Face Hub

Start with a dataset from the Hub by simply pasting the repository name

Import dataset

Import dataset from Hugging Face

Import from Python

Don't know where to start?

Explore these example datasets

stanfordnlp/imdb

Text Classification sentiment-classification

100K rows

databricks/databricks-dolly-15k

Question answering instruction-dataset rag

15K rows

dvilasuero/finepersonas-v0.1-tiny-flux-schnell

Text to Image synthetic rlaif

350 rows

Argilla, Importing Data

The screenshot shows the Argilla web interface. At the top, there's a dark header with a 'Home' link and a user profile icon labeled 'RO'. Below the header is a yellow warning banner that reads: '⚠ Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)'. A red arrow points to this banner. The main content area is titled 'Your datasets' and shows 'None yet'. There are two large grey placeholder boxes. On the right, there's a sidebar with a 'Close' button and a search bar containing 'Paste a repo id e.g., stanfordnlp/imdb'. Below the search bar, there's a section titled 'Don't know where to start?' with the text 'Explore these example datasets'. This section lists two example datasets: 'stanfordnlp/imdb' and 'databricks/databricks-dolly-15k'. The 'stanfordnlp/imdb' dataset is shown with tags for 'Text Classification' and 'sentiment-classification', and a note '100K rows'. The 'databricks/databricks-dolly-15k' dataset is shown with tags for 'Question answering', 'instruction-dataset', and 'rag', and a note '15K rows'. At the bottom, the start of another dataset 'dvlasuero/finepersonas-v0.1-tiny-flux-' is visible.

Home RO

⚠ Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)

Your datasets

None yet

Import a dataset from Hugging Face Hub

Start with a dataset from the Hub by simply pasting the repository name

[Import dataset](#)

Don't know where to start?

Explore these example datasets

stanfordnlp/imdb

Text Classification

sentiment-classification

100K rows

databricks/databricks-dolly-15k


Question answering

instruction-dataset rag

15K rows

dvlasuero/finepersonas-v0.1-tiny-flux-

Argilla, Copy HF Id

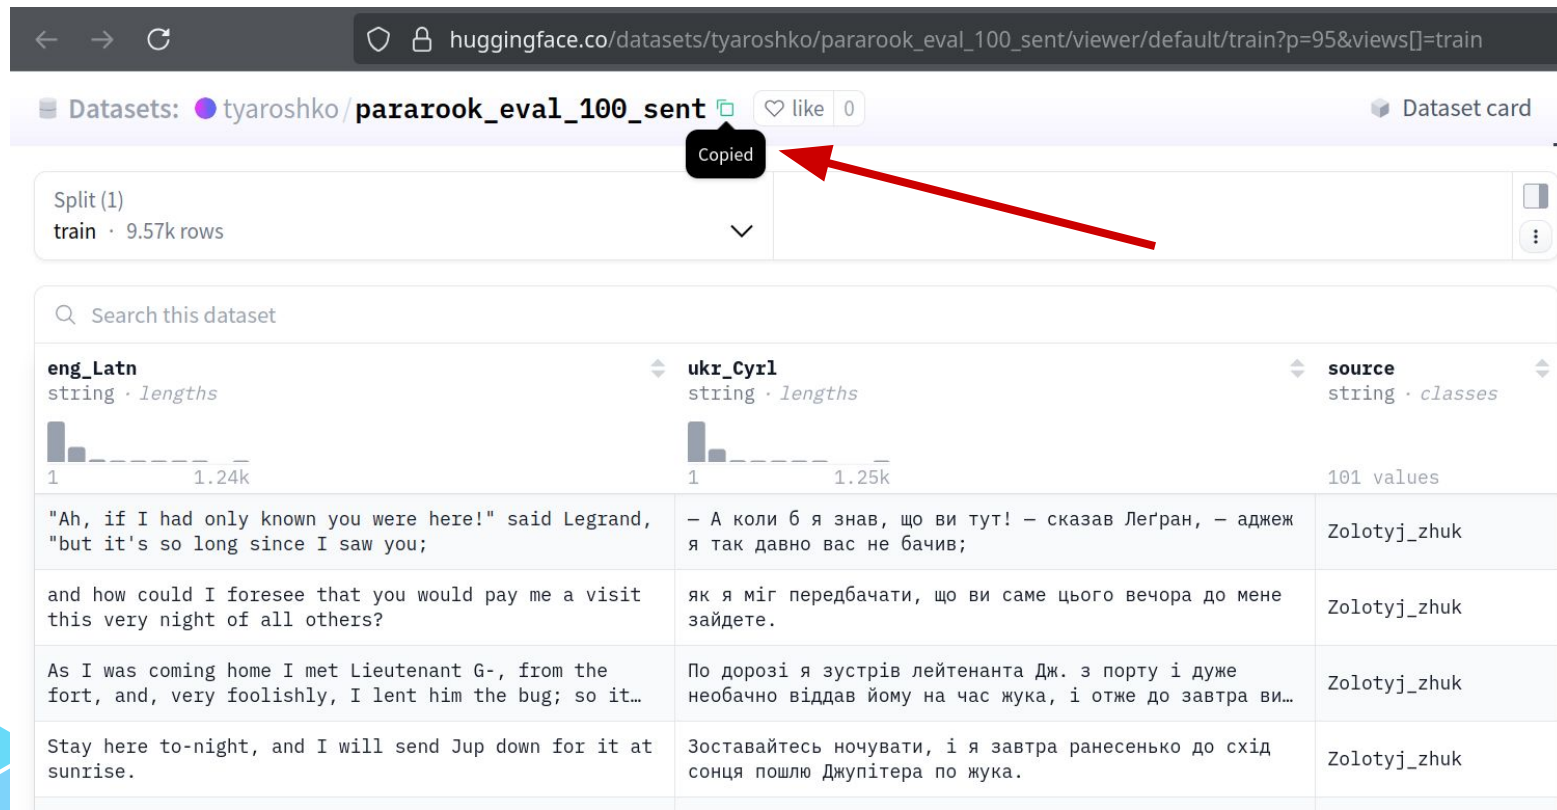

The screenshot shows the Hugging Face dataset viewer interface. The URL in the browser is `huggingface.co/datasets/tyaroshko/pararook_eval_100_sent/viewer/default/train?p=95&views[]=train`. The dataset name is `tyaroshko/pararook_eval_100_sent` and it has 0 likes. A red arrow points to the 'Copied' tooltip that appears when hovering over the dataset name.

Split (1)
train · 9.57k rows

Search this dataset

eng_Latn string · lengths	ukr_Cyrl string · lengths	source string · classes
		101 values
"Ah, if I had only known you were here!" said Legrand, "but it's so long since I saw you;	— А коли б я знав, що ви тут! — сказав Леґран, — адже я так давно вас не бачив;	Zolotyj_zhuk
and how could I foresee that you would pay me a visit this very night of all others?	як я міг передбачати, що ви саме цього вечора до мене зайдете.	Zolotyj_zhuk
As I was coming home I met Lieutenant G-, from the fort, and, very foolishly, I lent him the bug; so it...	По дорозі я зустрів лейтенанта Дж. з порту і дуже необачно віддав йому на час жука, і отже до завтра ви...	Zolotyj_zhuk
Stay here to-night, and I will send Jup down for it at sunrise.	Зоставайтеся ночувати, і я завтра ранесенько до схід сонця пошлю Джупітера по жука.	Zolotyj_zhuk

Argilla, Paste as a Source

 Home RO

Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)

Your datasets

None yet

Import a dataset from Hugging Face Hub

Start with a dataset from the Hub by simply pasting the repository name

Import dataset

× Close

 tyaroshko/pararook_eval_100_sent



Don't know where to start?

Explore these example datasets

stanfordnlp/imdb

 Text Classification

sentiment-classification

100K rows

databricks/databricks-dolly-15k

 Question answering

Argilla, Create

 Home

RO

 Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)

Your datasets

None yet

Import a dataset from Hugging Face Hub

Start with a dataset from the Hub by simply pasting the repository name

Import dataset

 Close

 tyaroshko/pararook_eval_100_sent



Don't know where to start?

Explore these example datasets

stanfordnlp/imdb

 Text Classification

sentiment-classification

100K rows

databricks/databricks-dolly-15k

 Question answering

Argilla, Setup Task

Home / pararook_eval_100_sent Preview

eng_Latn

Before going up into the blue hills, Tom-s Gomez stopped for gasoline at the lonely station.

ukr_Cyrl

Перш ніж виїхати на сині пагорби, Томас Гомец зупинився біля самотньої бензоколонки, щоб заправити машину.

rating_0 *

0 1 2 3 4 5 6 7 8 9 10

tyaroshko pararook_eval_100_sent

Split (1)
train · 9.57k rows

Search this dataset

eng_Latn

string · lengths

1

1.24k

ukr_Cyrl

string · lengths

1

1.25k

source

string · classes

101 values

Before going up into the blue hills,...

Перш ніж виїхати на сині пагорби, Томас...

Nicna_zustric

"Kind of alone out here, aren't you,...

— Нуднувато тут самому, голубе? —

Nicna_zustric

Fields

eng_Latn string

No mapping Text field

ukr_Cyrl string

No mapping Text field

source string

No mapping Text field

Questions

rating_0

Label Multi-label Ranking

Rating

10

☒ Required question

Text

Label

Multi-label

Rating

Ranking

Span

Argilla, Prerequisites for Interannotator Agreement

Home / argilla / pararook_eval_100_sent / settings

Dataset settings

General Fields Questions Danger zone

Dataset info

pararook_eval_100_sent [Copy link](#)

Task distribution

Minimum submitted responses ⓘ [Cancel](#) [Update](#)

Annotation guidelines

Write Preview

Оцініть якість перекладу з англійської на українську за шкалою від 1 до 10, де 1 — поганий переклад зі спотвореним сенсом і помилками, 5-6 — задовільний переклад, де переданий сенс, 10 — зразковий переклад з точною передачею сенсу, природною українською мовою та збереженим стилем оригіналу. Звертайте увагу на точність передачі сенсу, граматичну правильність, природність мови, відповідність

Argilla, Edit Metadata



Home / argilla / pararook_eval_100_sent / settings

RO

Dataset settings

< See your dataset

General

Fields

Questions

Danger zone

Edit questions

rating_0

Rating

Required

Title

Оцініть якість перекладу за шкалою від 1 до 10

Description

UI Preview

Оцініть якість перекладу за шкалою від 1 до 10

0 1 2 3 4 5 6 7 8 9 10

Cancel

Update

Argilla, Completed UI

Home / argilla / pararook_eval_100_sent ⚙️

⚠️ Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)

🔍 Pending ▾ ⚙️ Filters 📈 Sort ▾

1 of 9565 < >

● Pending ⋮

Англійською
"It'll be great.

Українською
— Все буде чудово.

Оцініть якість перекладу за шкалою від 1 до 10 *

0 1 2 3 4 5 6 7 8 9 10

🗑️ Discard **ctrl S** Save as draft 📄 Submit

Argilla, Guidelines

 Home / argilla / pararook_eval_100_sent 

+

Push to Hub

RO

 Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)

Pending

Filters

Sort

2 of 9564

Pending

Англійською

He began to shake as with an ague-fit, till the gun fell from his hand with a splash.

Українською

Він затремтів, як у лихоманці. Рушниця випала з рук у воду.

GUIDELINES

Оцініть якість перекладу з англійської на українську за шкалою від 1 до 10, де 1 — поганий переклад зі спотвореним сенсом і помилками, 5-6 — задовільний переклад, де переданий сенс, 10 — зразковий переклад з точною передачею сенсу, природною українською мовою та збереженим стилем оригіналу. Звертайте увагу на точність передачі сенсу, граматичну правильність, природність мови, відповідність стилю та термінологічну коректність.

Оцініть якість перекладу за шкалою від 1 до 10 *

0

1

2

3

4

5

6

7

8

9

10

Discard

Save as draft

Submit



Active Learning with Argilla

Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)

Workspaces ▾

Sort ▾



[Import dataset from Hugging Face](#)

[Import from Python](#)

utes ago

If you're using a private Space, check the [docs](#).

7K rows

RO

```
# pip install argilla
# to run this code snippet

import argilla as rg

client = rg.Argilla(
    api_url="https://robinhad-my-argilla.hf.space",
    api_key="
)

settings = rg.Settings(
    guidelines="These are some guidelines.",
    fields=[
        rg.TextField(
            name="text",
        ),
    ],
    questions=[
        rg.LabelQuestion(
            name="label",
            labels=["yes", "no"]
        ),
    ],
)
```

ent-classi

5k

action-dati

tiny-flux-

ralf

Active Learning with Argilla

```
!pip install argilla fastapi uvicorn
```

```
import argilla as rg

client = rg.Argilla(
    api_url="https://robinhad-my-argilla.hf.space",
    api_key="",
)
```

```
dataset = client.datasets(name="pararook_eval_100_sent")
```

✓ 1.5s

Active Learning with Argilla

```
from random import randint

debug = False
for record in dataset.records(
    with_suggestions=True,
    with_responses=True,
):
    if debug:
        print(record)
        # Access the record properties
        print(record.fields["eng_Latn"])
        print(record.metadata)
        print(record.vectors)
        print(record.suggestions)
        print(record.responses)

    print("Suggestions:")
    print(record.suggestions)

    if len(record.suggestions) == 0:
        record.suggestions.add(
            rg.Suggestion("rating_0", randint(1,10), score=0.9, agent="random")
        )

dataset.records.log(records=[
    record # here it would be more efficient to log in batches, for illustration purposes we log one by one
])
```

Active Learning with Argilla



Home / argilla / pararook_eval_100_sent ⚙️



Push to Hub

RO



Persistent storage is not enabled. All data will be lost if this space restarts. Go to the space settings to enable it. [Learn more](#)



Pending ▾

Filters

Sort (1) ▾

Reset



1 of 9564 < >

● Pending ⋮

Англійською

Before going up into the blue hills, Tom-s Gomez stopped for gasoline at the lonely station.

Українською

Перш ніж виїхати на сині пагорби, Томас Гомец зупинився біля самотньої бензоколонки, щоб заправити машину.

Оцініть якість перекладу за шкалою від 1 до 10 *

0 1 2 3 4 5+ 6 7 8 9 10




Discard

ctrl S

Save as draft



Submit

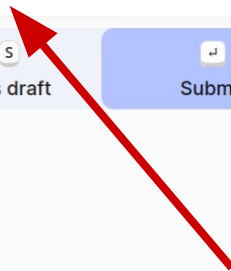

Active Learning with Argilla

```
▷ ~  
# my_webhook.py file  
import argilla as rg  
  
from datetime import datetime  
from argilla import webhook_listener  
  
@webhook_listener(events="record.updated")  
async def my_webhook_handler(dataset: rg.Dataset, type: str, timestamp: datetime):  
    for record in dataset.records(  
        with_suggestions=True,  
        with_responses=False,  
    ):  
        if debug:  
            print(record)  
            # Access the record properties  
            print(record.fields["eng_Latn"])  
            print(record.metadata)  
            print(record.vectors)  
            print(record.suggestions)  
            print(record.responses)  
  
        print("Suggestions:")  
        print(record.suggestions)  
  
        if len(record.suggestions) == 0:  
            record.suggestions.add(  
                rg.Suggestion("rating_0", randint(1,10), score=0.9, agent="random")  
            )  
  
        dataset.records.log(records=[  
            record # here it would be more efficient to log in batches, for illustration purposes we log one by one  
        ])  
    print(dataset, type, timestamp)  
[24] ✓ 2.3s
```

```
# my_webhook.py file  
from argilla import get_webhook_server  
  
server = get_webhook_server()
```

Argilla

Pros

Native integration with
HuggingFace datasets

Free and open source

Free multiannotator
features

Can create tasks
programmatically

Cons

Not so slick UI

Limited selection of tasks
(maybe good enough for
your use case)

Deployment: HuggingFace
or Docker



Questions, maybe?

Thanks!

Contact me

chaplynskyi.dmytro@ucu.edu.ua

@dchaplinsky on twitter/tg

<https://github.com/lang-uk/>

<https://huggingface.co/lang-uk>

CREDITS: This presentation template was created by **Slidesgo**, and includes icons by **Flaticon**, and infographics & images by **Freepik**

