


cl\_moveit2z::CbMoveEndEffector  
Trajectory::onOrthogonalAllocation

cl\_keyboard::CbDefaultKeyboard  
Behavior::postKeyEvent

smacc2::ISmaccClientBehavior  
::postEvent

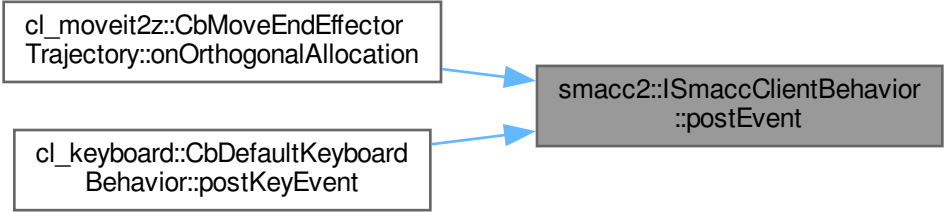

```
graph LR; A["cl_moveit2z::CbMoveEndEffectorTrajectory::onOrthogonalAllocation"] --> C["smacc2::ISmaccClientBehavior::postEvent"]; B["cl_keyboard::CbDefaultKeyboardBehavior::postKeyEvent"] --> C;
```

The diagram illustrates a dependency or call relationship. Two source functions, 'cl\_moveit2z::CbMoveEndEffectorTrajectory::onOrthogonalAllocation' and 'cl\_keyboard::CbDefaultKeyboardBehavior::postKeyEvent', are shown in white boxes on the left. Blue arrows point from each of these boxes to a single target function, 'smacc2::ISmaccClientBehavior::postEvent', which is shown in a gray box on the right.