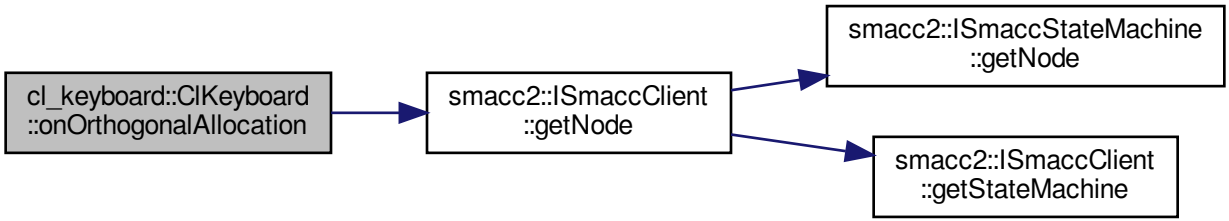
cl_keyboard::ClKeyboard
::onOrthogonalAllocation
smacc2::ISmaccClient
::getNode
smacc2::ISmaccStateMachine
::getNode
smacc2::ISmaccClient
::getStateMachine