


smacc2::ISmaccOrthogonal
::setStateMachine

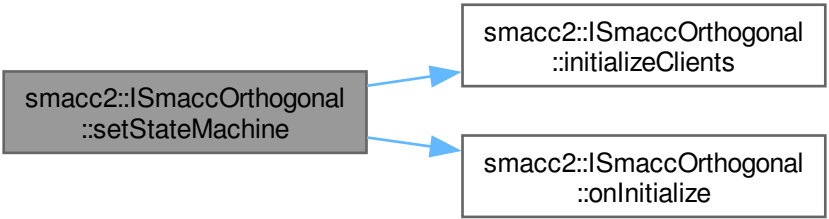

```
graph LR; A[smacc2::ISmaccOrthogonal::setStateMachine] --> B[smacc2::ISmaccOrthogonal::initializeClients]; A --> C[smacc2::ISmaccOrthogonal::onInitialize];
```

The diagram illustrates a method call sequence. A grey rectangular box on the left contains the text 'smacc2::ISmaccOrthogonal::setStateMachine'. Two blue arrows originate from the right side of this box. The top arrow points to a white rectangular box containing 'smacc2::ISmaccOrthogonal::initializeClients'. The bottom arrow points to another white rectangular box containing 'smacc2::ISmaccOrthogonal::onInitialize'.

smacc2::ISmaccOrthogonal
::initializeClients

smacc2::ISmaccOrthogonal
::onInitialize