


smacc2::ISmaccOrthogonal
::setStateMachine

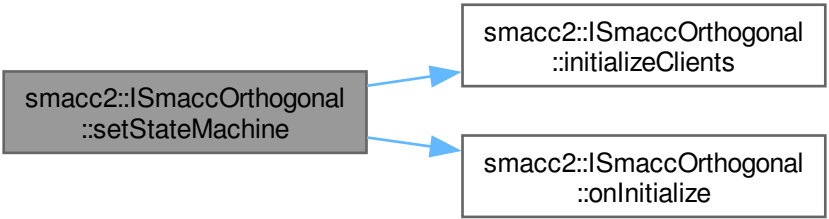

```
graph LR; A["smacc2::ISmaccOrthogonal::setStateMachine"] --> B["smacc2::ISmaccOrthogonal::initializeClients"]; A --> C["smacc2::ISmaccOrthogonal::onInitialize"]
```

The diagram illustrates a method call sequence. A grey box on the left, labeled 'smacc2::ISmaccOrthogonal::setStateMachine', has two blue arrows pointing to the right. The top arrow points to a white box labeled 'smacc2::ISmaccOrthogonal::initializeClients'. The bottom arrow points to another white box labeled 'smacc2::ISmaccOrthogonal::onInitialize'.

smacc2::ISmaccOrthogonal
::initializeClients

smacc2::ISmaccOrthogonal
::onInitialize