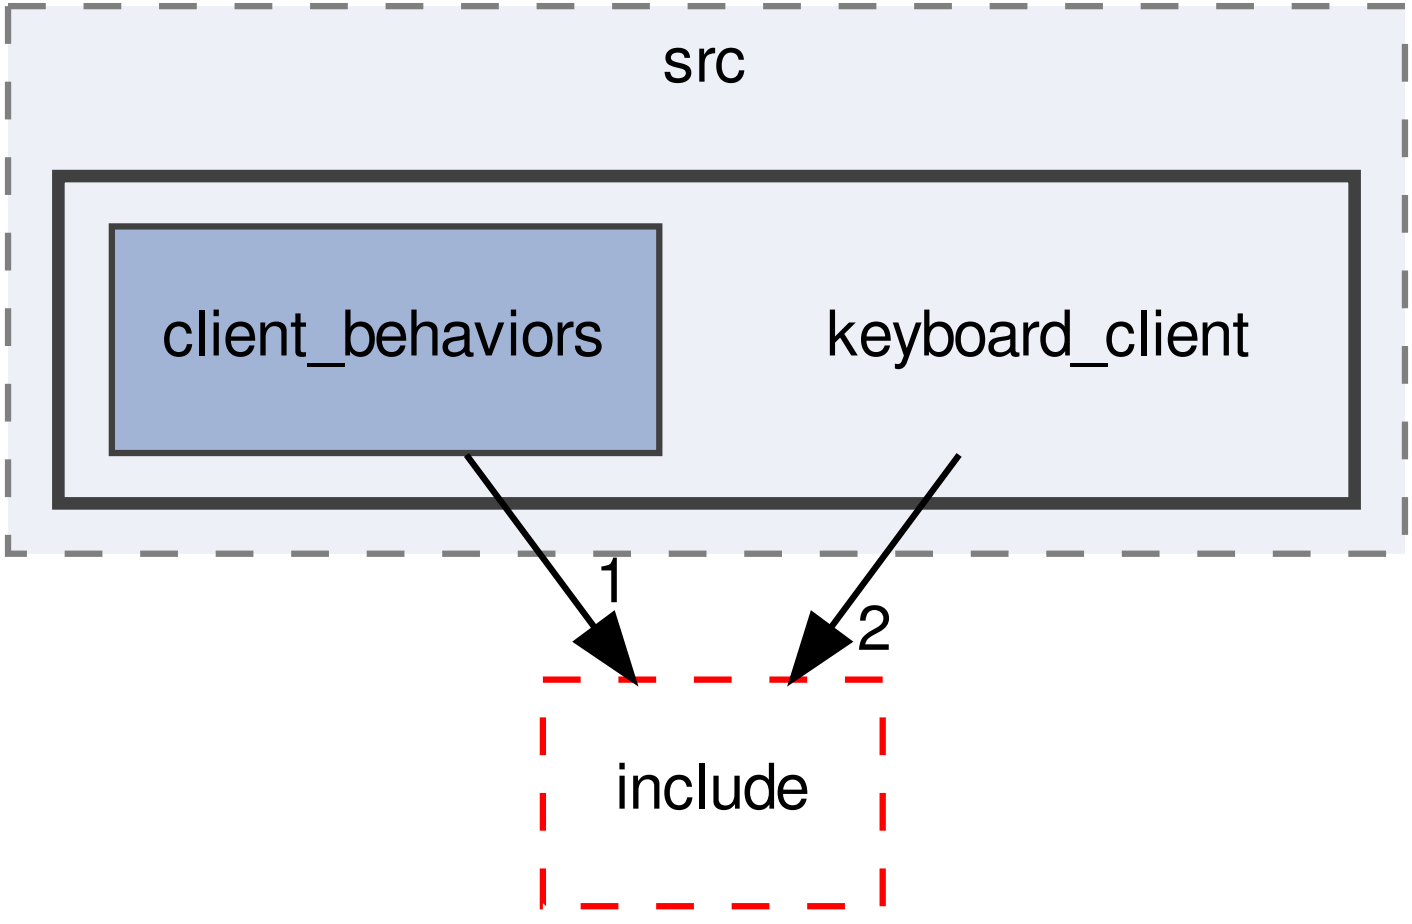
src
client_behaviors
keyboard_client
1
2
include