


smacc2::ISmaccOrthogonal  
::addClientBehavior

smacc2::ISmaccOrthogonal  
::initState

smacc2::ISmaccOrthogonal  
::runtimeConfigure

smacc2::ISmaccOrthogonal  
::getName

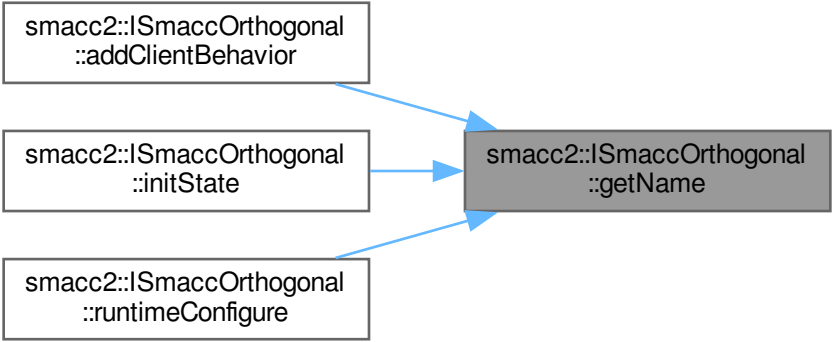

```
graph LR; A[smacc2::ISmaccOrthogonal::addClientBehavior] --> D[smacc2::ISmaccOrthogonal::getName]; B[smacc2::ISmaccOrthogonal::initState] --> D; C[smacc2::ISmaccOrthogonal::runtimeConfigure] --> D;
```