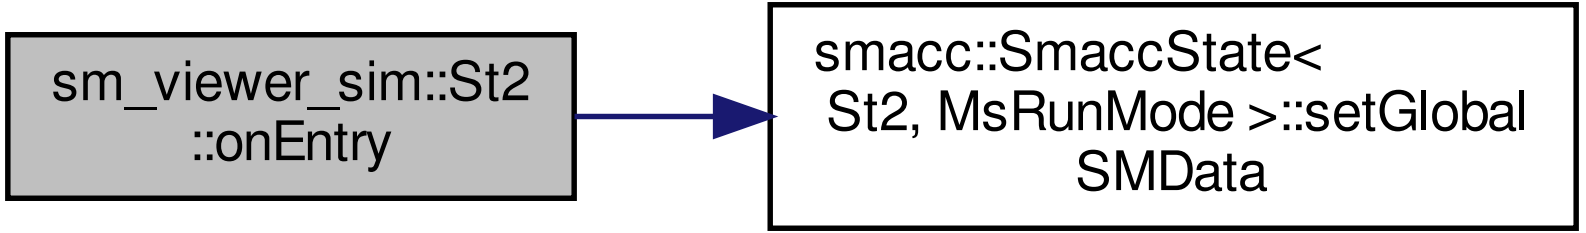
sm_viewer_sim::St2
::onEntry
smacc::SmaccState<
St2, MsRunMode >::setGlobal
SMData