


smacc\_client\_library  
/move\_base\_z\_client/move  
\_base\_z\_client\_plugin/include  
/move\_base\_z\_client\_plugin/client  
\_behaviors/cb\_undo\_path\_backwards.h

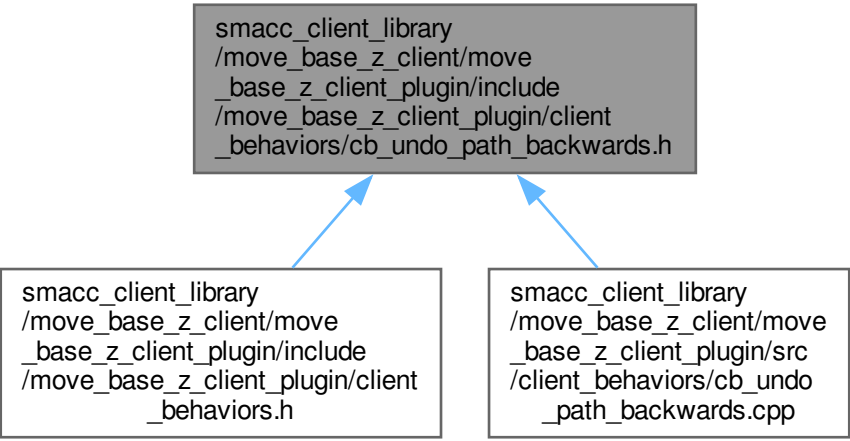

```
graph BT; A["smacc_client_library  
/move_base_z_client/move_base_z_client_plugin/include  
/move_base_z_client_plugin/client_behaviors/cb_undo_path_backwards.h"] <--> B["smacc_client_library  
/move_base_z_client/move_base_z_client_plugin/include  
/move_base_z_client_plugin/client_behaviors.h"]; A <--> C["smacc_client_library  
/move_base_z_client/move_base_z_client_plugin/src  
/client_behaviors/cb_undo_path_backwards.cpp"]
```

smacc\_client\_library  
/move\_base\_z\_client/move  
\_base\_z\_client\_plugin/include  
/move\_base\_z\_client\_plugin/client  
\_behaviors.h

smacc\_client\_library  
/move\_base\_z\_client/move  
\_base\_z\_client\_plugin/src  
/client\_behaviors/cb\_undo  
\_path\_backwards.cpp