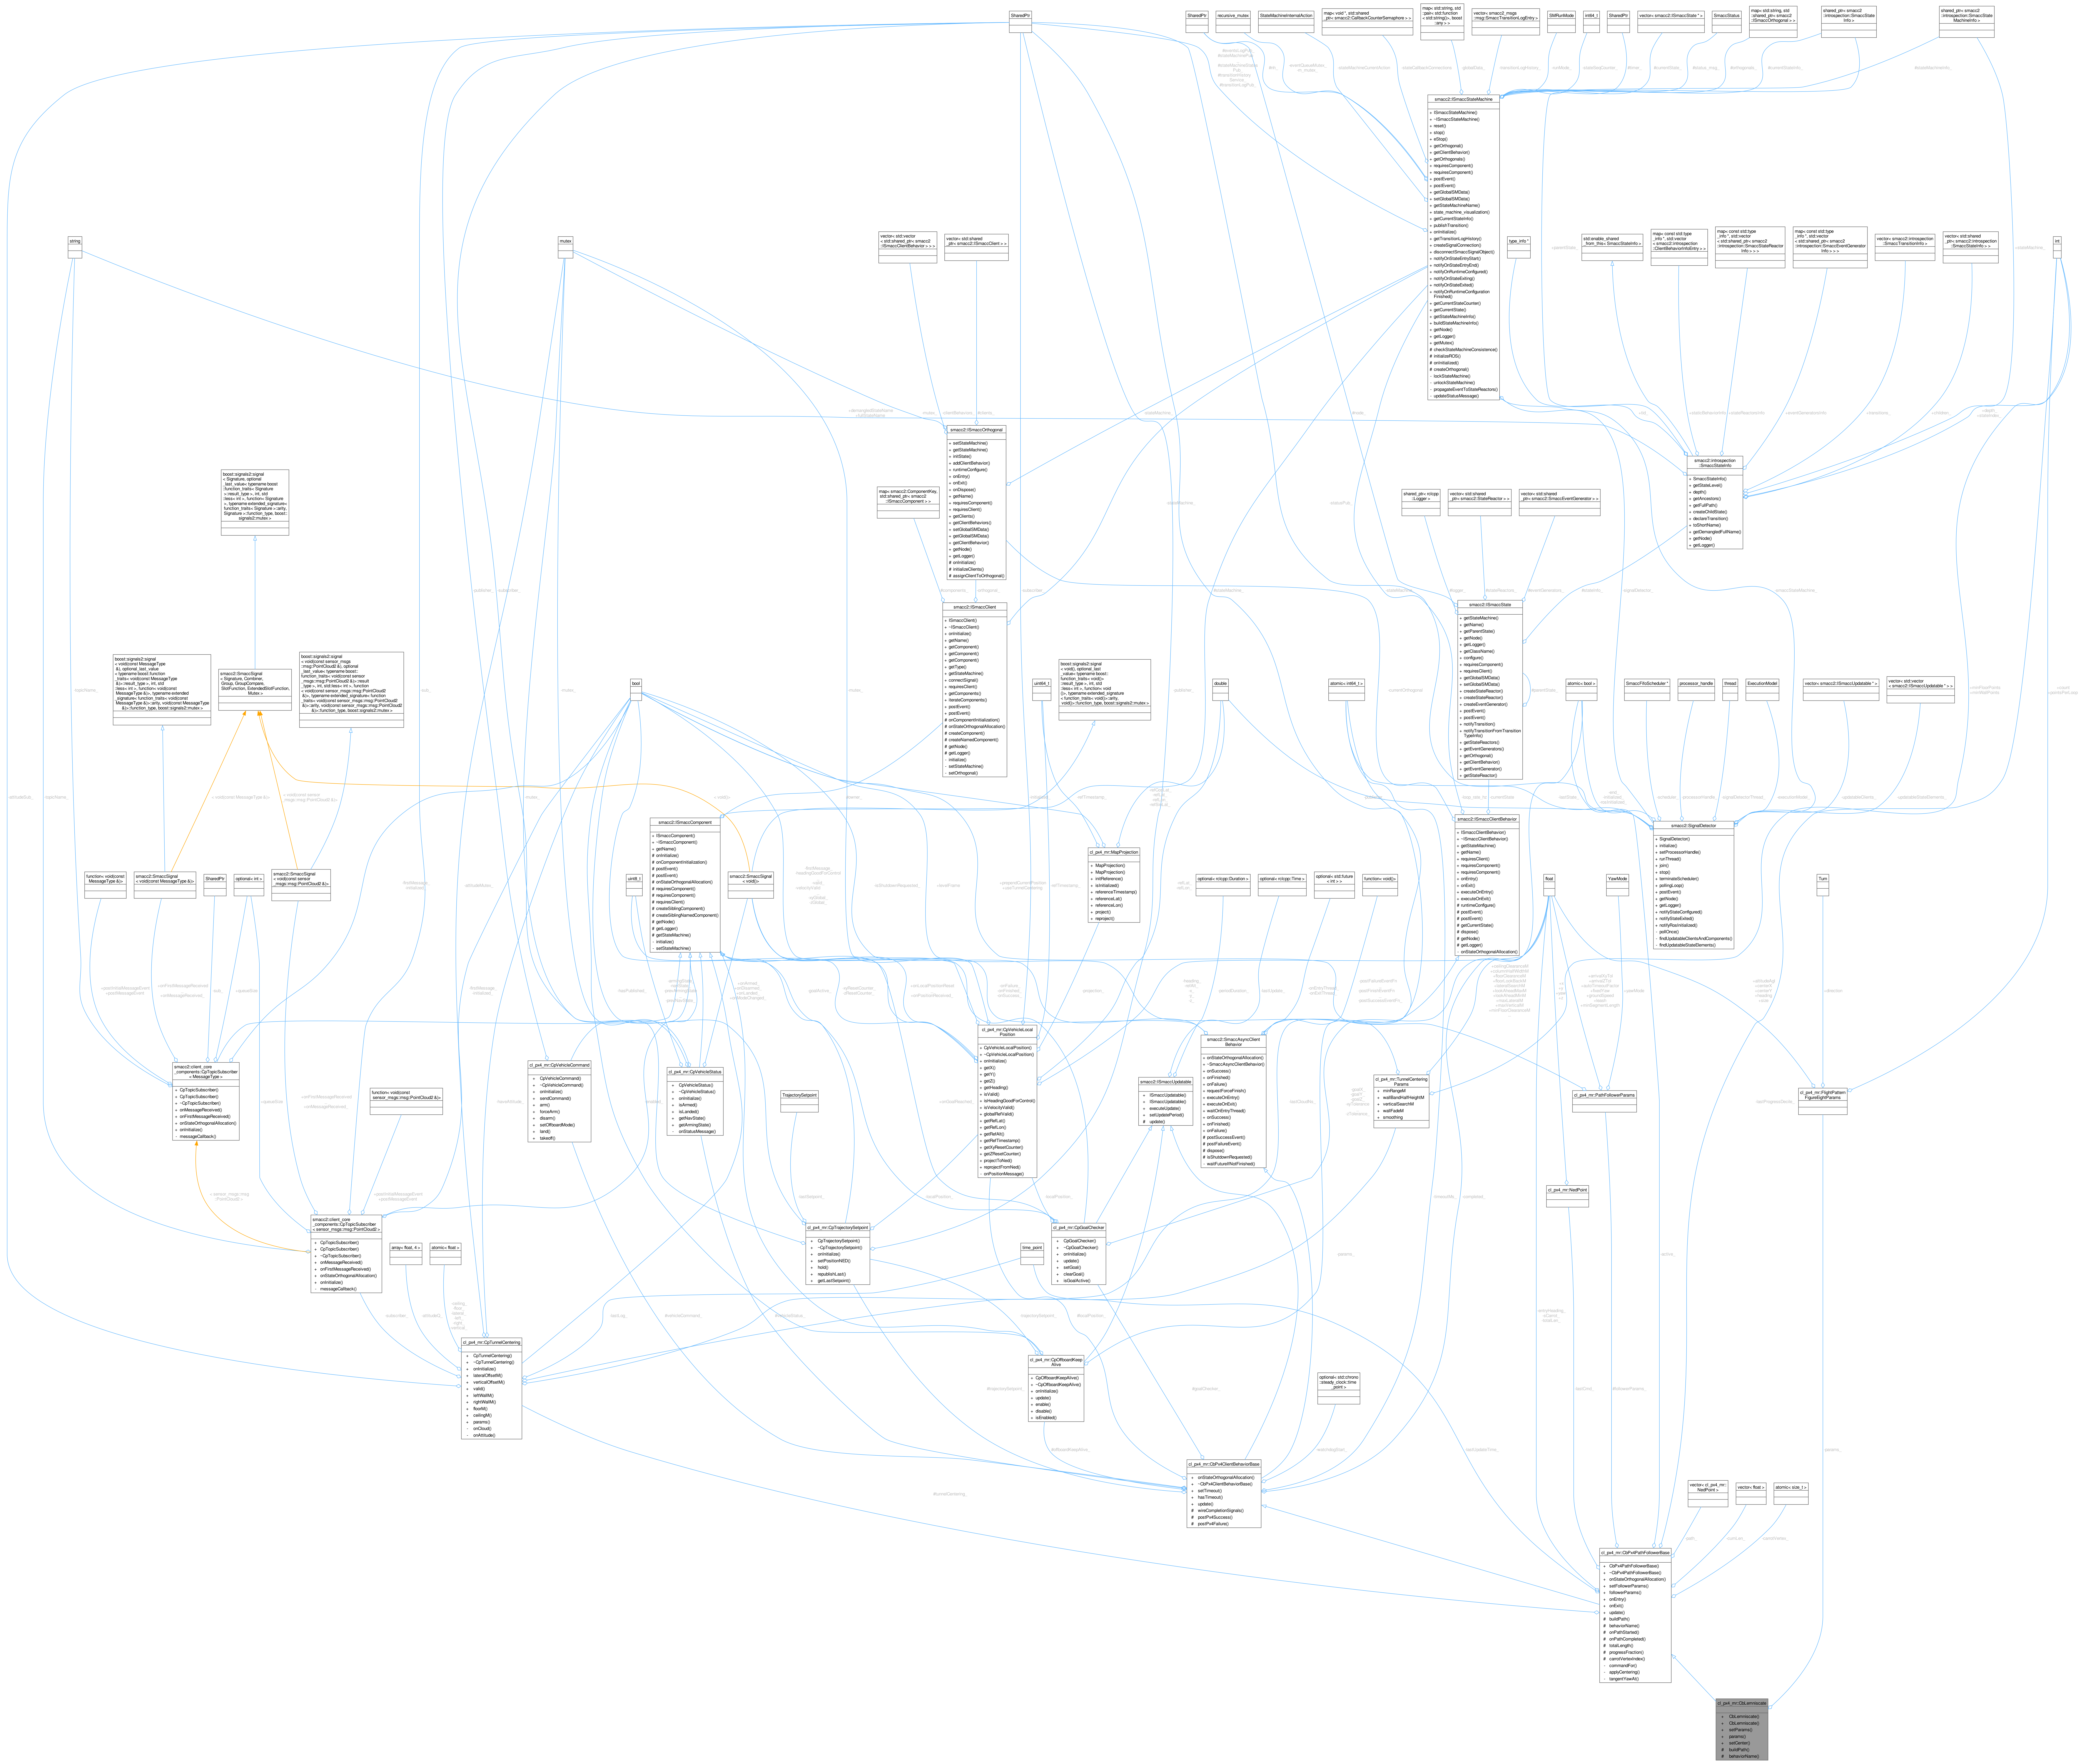
SharedPtr
recursive_mutex
StateMachineInternalAction
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< std::string()>, boost::any > >
vector< smacc2_msgs::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
shared_ptr< smacc2::introspection::SmaccStateInfo >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
smacc2::ISmaccStateMachine
string
mutex
smacc2::ISmaccOrthogonal
smacc2::introspection::SmaccStateInfo
smacc2::ISmaccClient
smacc2::ISmaccState
smacc2::ISmaccComponent
smacc2::SmaccSignal< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
smacc2::SmaccSignal< void(const MessageType &)>
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
smacc2::SmaccSignal< void()>
function< void(const MessageType &)>
optional< int >
bool
uint8_t
uint64_t
double
atomic< int64_t >
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector< smacc2::ISmaccUpdatable * > >
smacc2::ISmaccClientBehavior
smacc2::SignalDetector
cl_px4_mr::MapProjection
optional< rclcpp::Duration >
optional< rclcpp::Time >
optional< std::future< int > >
function< void()>
float
YawMode
Turn
smacc2::client_core_components::CpTopicSubscriber< MessageType >
cl_px4_mr::CpVehicleCommand
cl_px4_mr::CpVehicleStatus
TrajectorySetpoint
cl_px4_mr::CpVehicleLocalPosition
smacc2::ISmaccUpdatable
smacc2::SmaccAsyncClientBehavior
cl_px4_mr::TunnelCenteringParams
cl_px4_mr::PathFollowerParams
cl_px4_mr::FlightPatternFigureEightParams
function< void(const sensor_msgs::msg::PointCloud2 &)>
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
array< float, 4 >
atomic< float >
cl_px4_mr::CpTrajectorySetpoint
time_point
cl_px4_mr::CpGoalChecker
cl_px4_mr::NedPoint
cl_px4_mr::CpTunnelCentering
cl_px4_mr::CpOffboardKeepAlive
optional< std::chrono::steady_clock::time_point >
cl_px4_mr::CbPx4ClientBehaviorBase
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
cl_px4_mr::CbLemniscate
+ CbLemniscate()
+ CbLemniscate()
+ setParams()
+ params()
+ setCenter()
# buildPath()
# behaviorName()