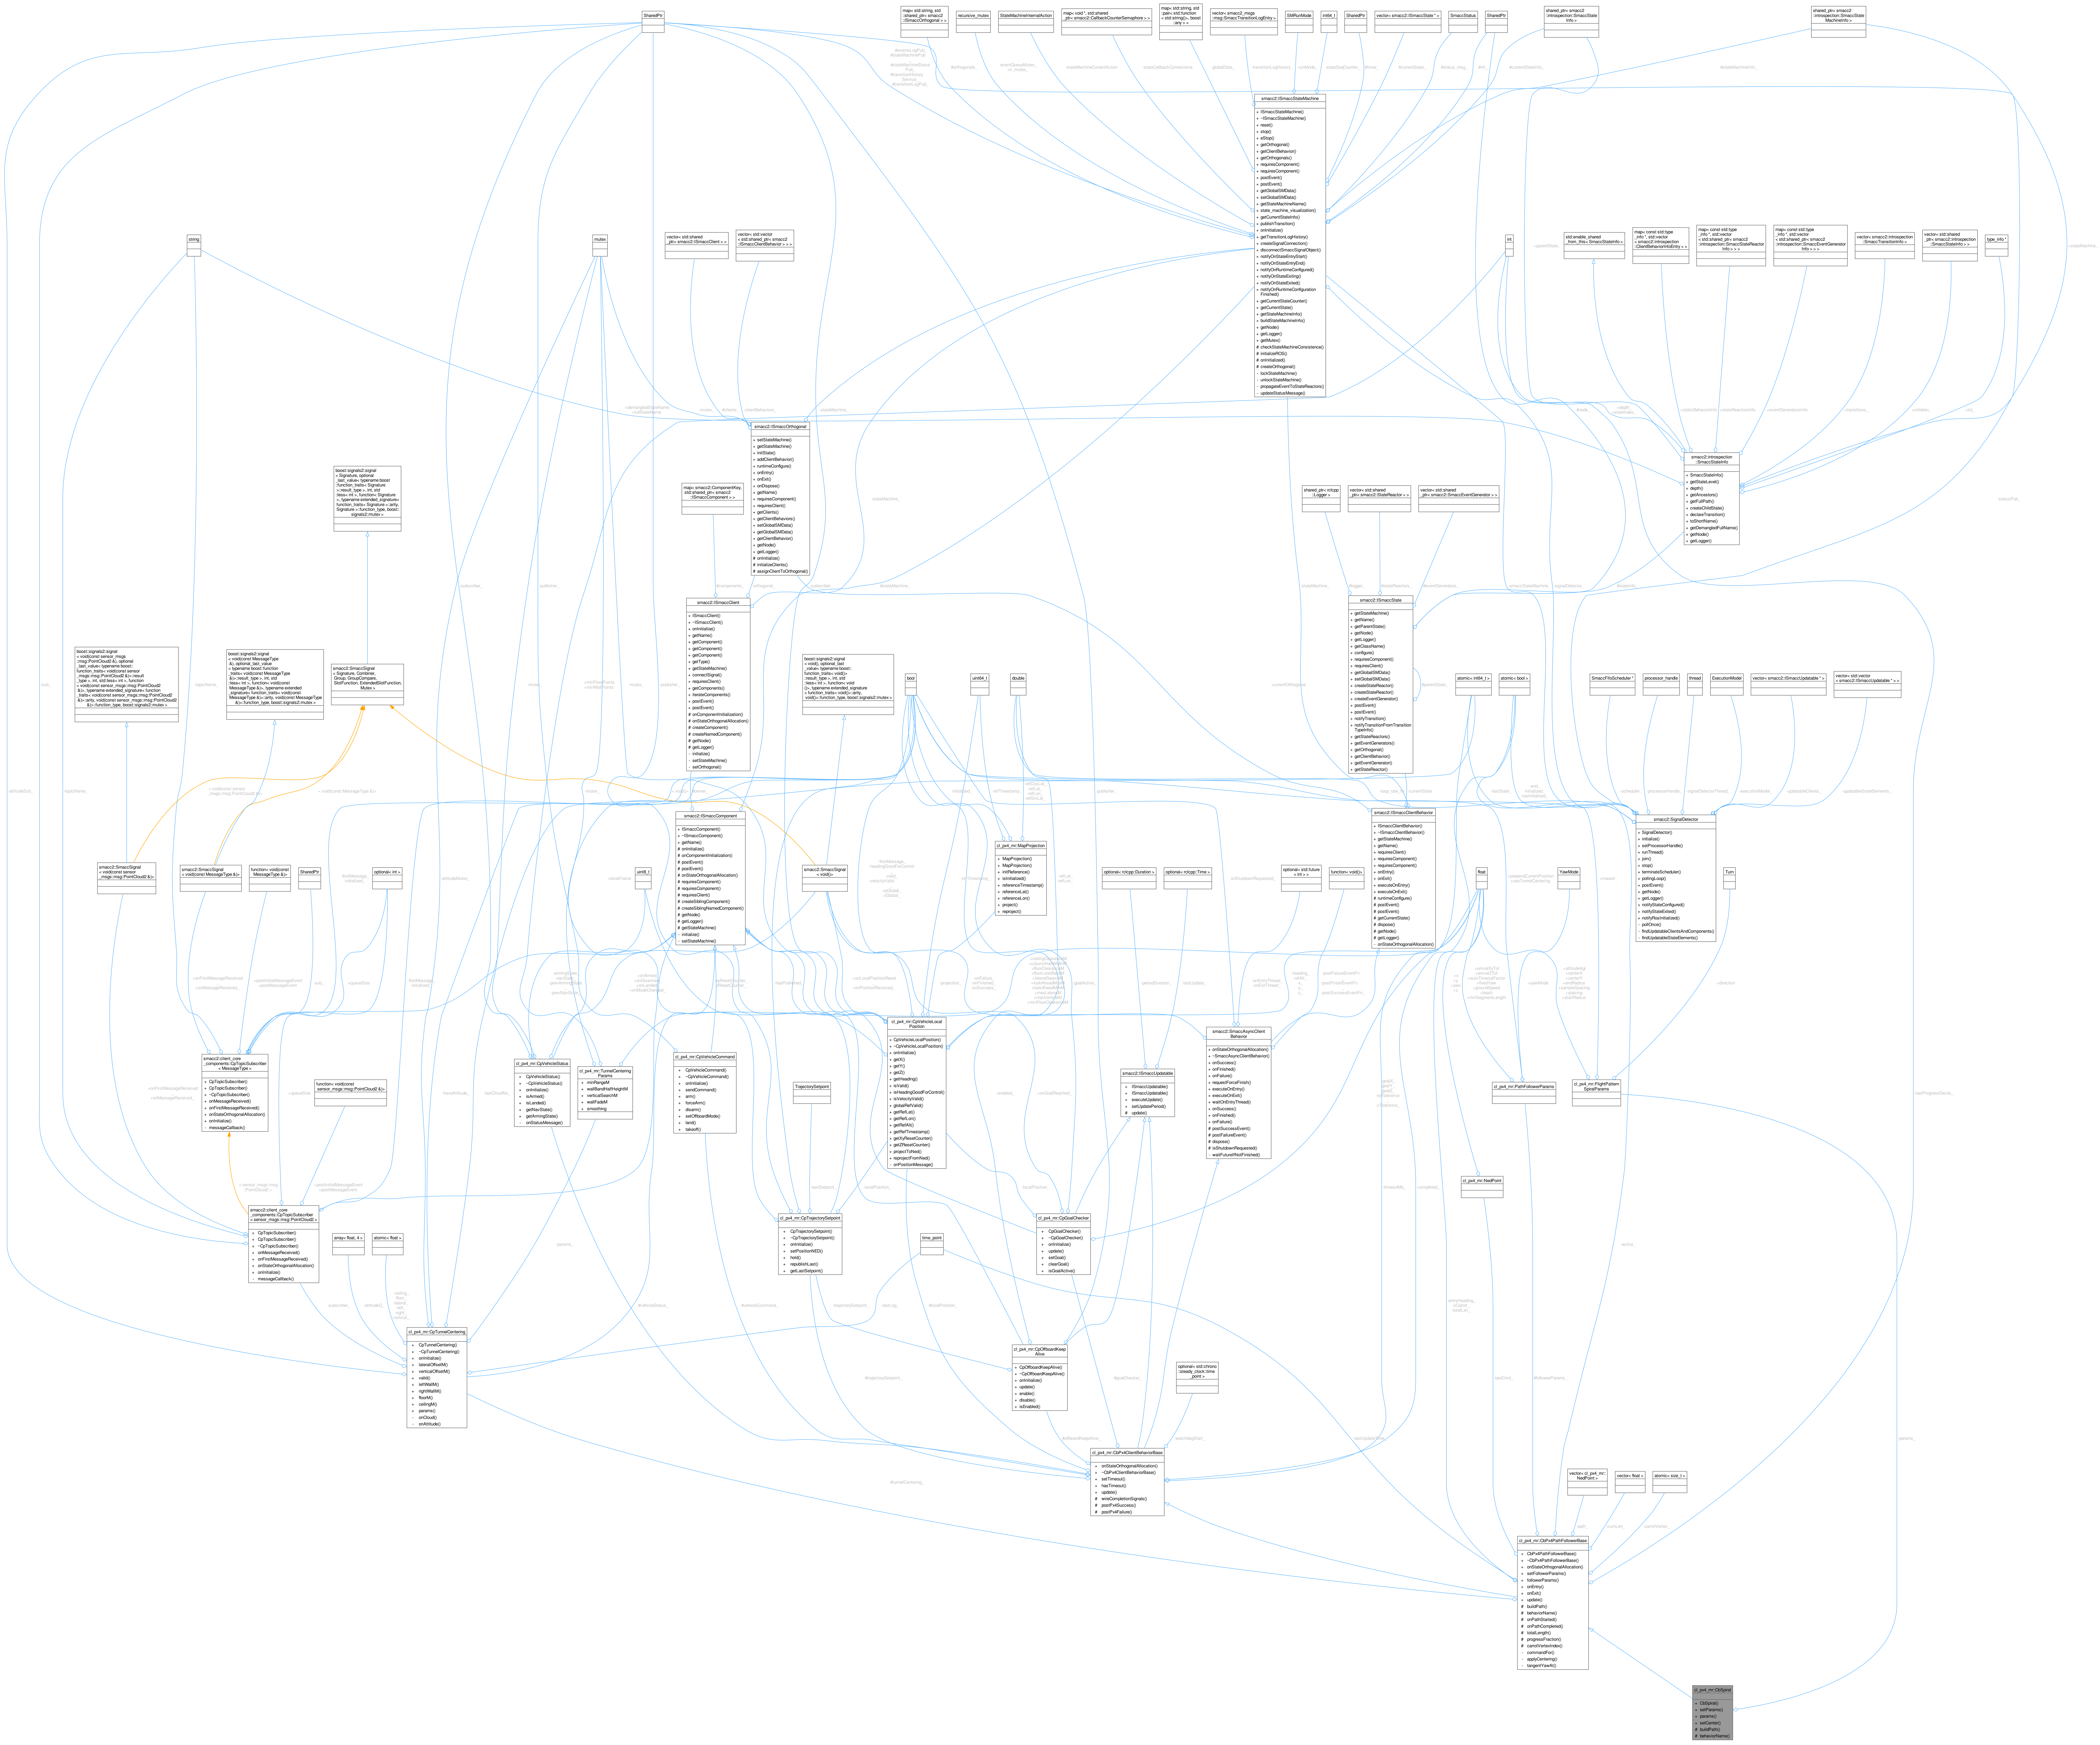
cl_px4_mr::CbSpiral
+ CbSpiral()
+ setParams()
+ params()
+ setCenter()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
-lastCmd_
#followerParams_
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#goalChecker_
#offboardKeepAlive_
-watchdogStart_
optional< std::chrono::steady_clock::time_point >
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_px4_mr::CpOffboardKeepAlive
smacc2::SmaccAsyncClientBehavior
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::ISmaccStateMachine
smacc2::ISmaccOrthogonal
smacc2::ISmaccClient
smacc2::ISmaccComponent
smacc2::ISmaccState
smacc2::ISmaccClientBehavior
smacc2::SignalDetector
smacc2::ISmaccUpdatable
smacc2::introspection::SmaccStateInfo
smacc2::client_core_components::CpTopicSubscriber< MessageType >
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
cl_px4_mr::CpVehicleLocalPosition
cl_px4_mr::CpVehicleStatus
cl_px4_mr::TunnelCenteringParams
cl_px4_mr::CpVehicleCommand
cl_px4_mr::CpTrajectorySetpoint
cl_px4_mr::CpTunnelCentering
cl_px4_mr::MapProjection
cl_px4_mr::PathFollowerParams
cl_px4_mr::FlightPatternSpiralParams
cl_px4_mr::NedPoint
SharedPtr
string
mutex
bool
uint64_t
double
float
int
YawMode
Turn
TrajectorySetpoint
time_point