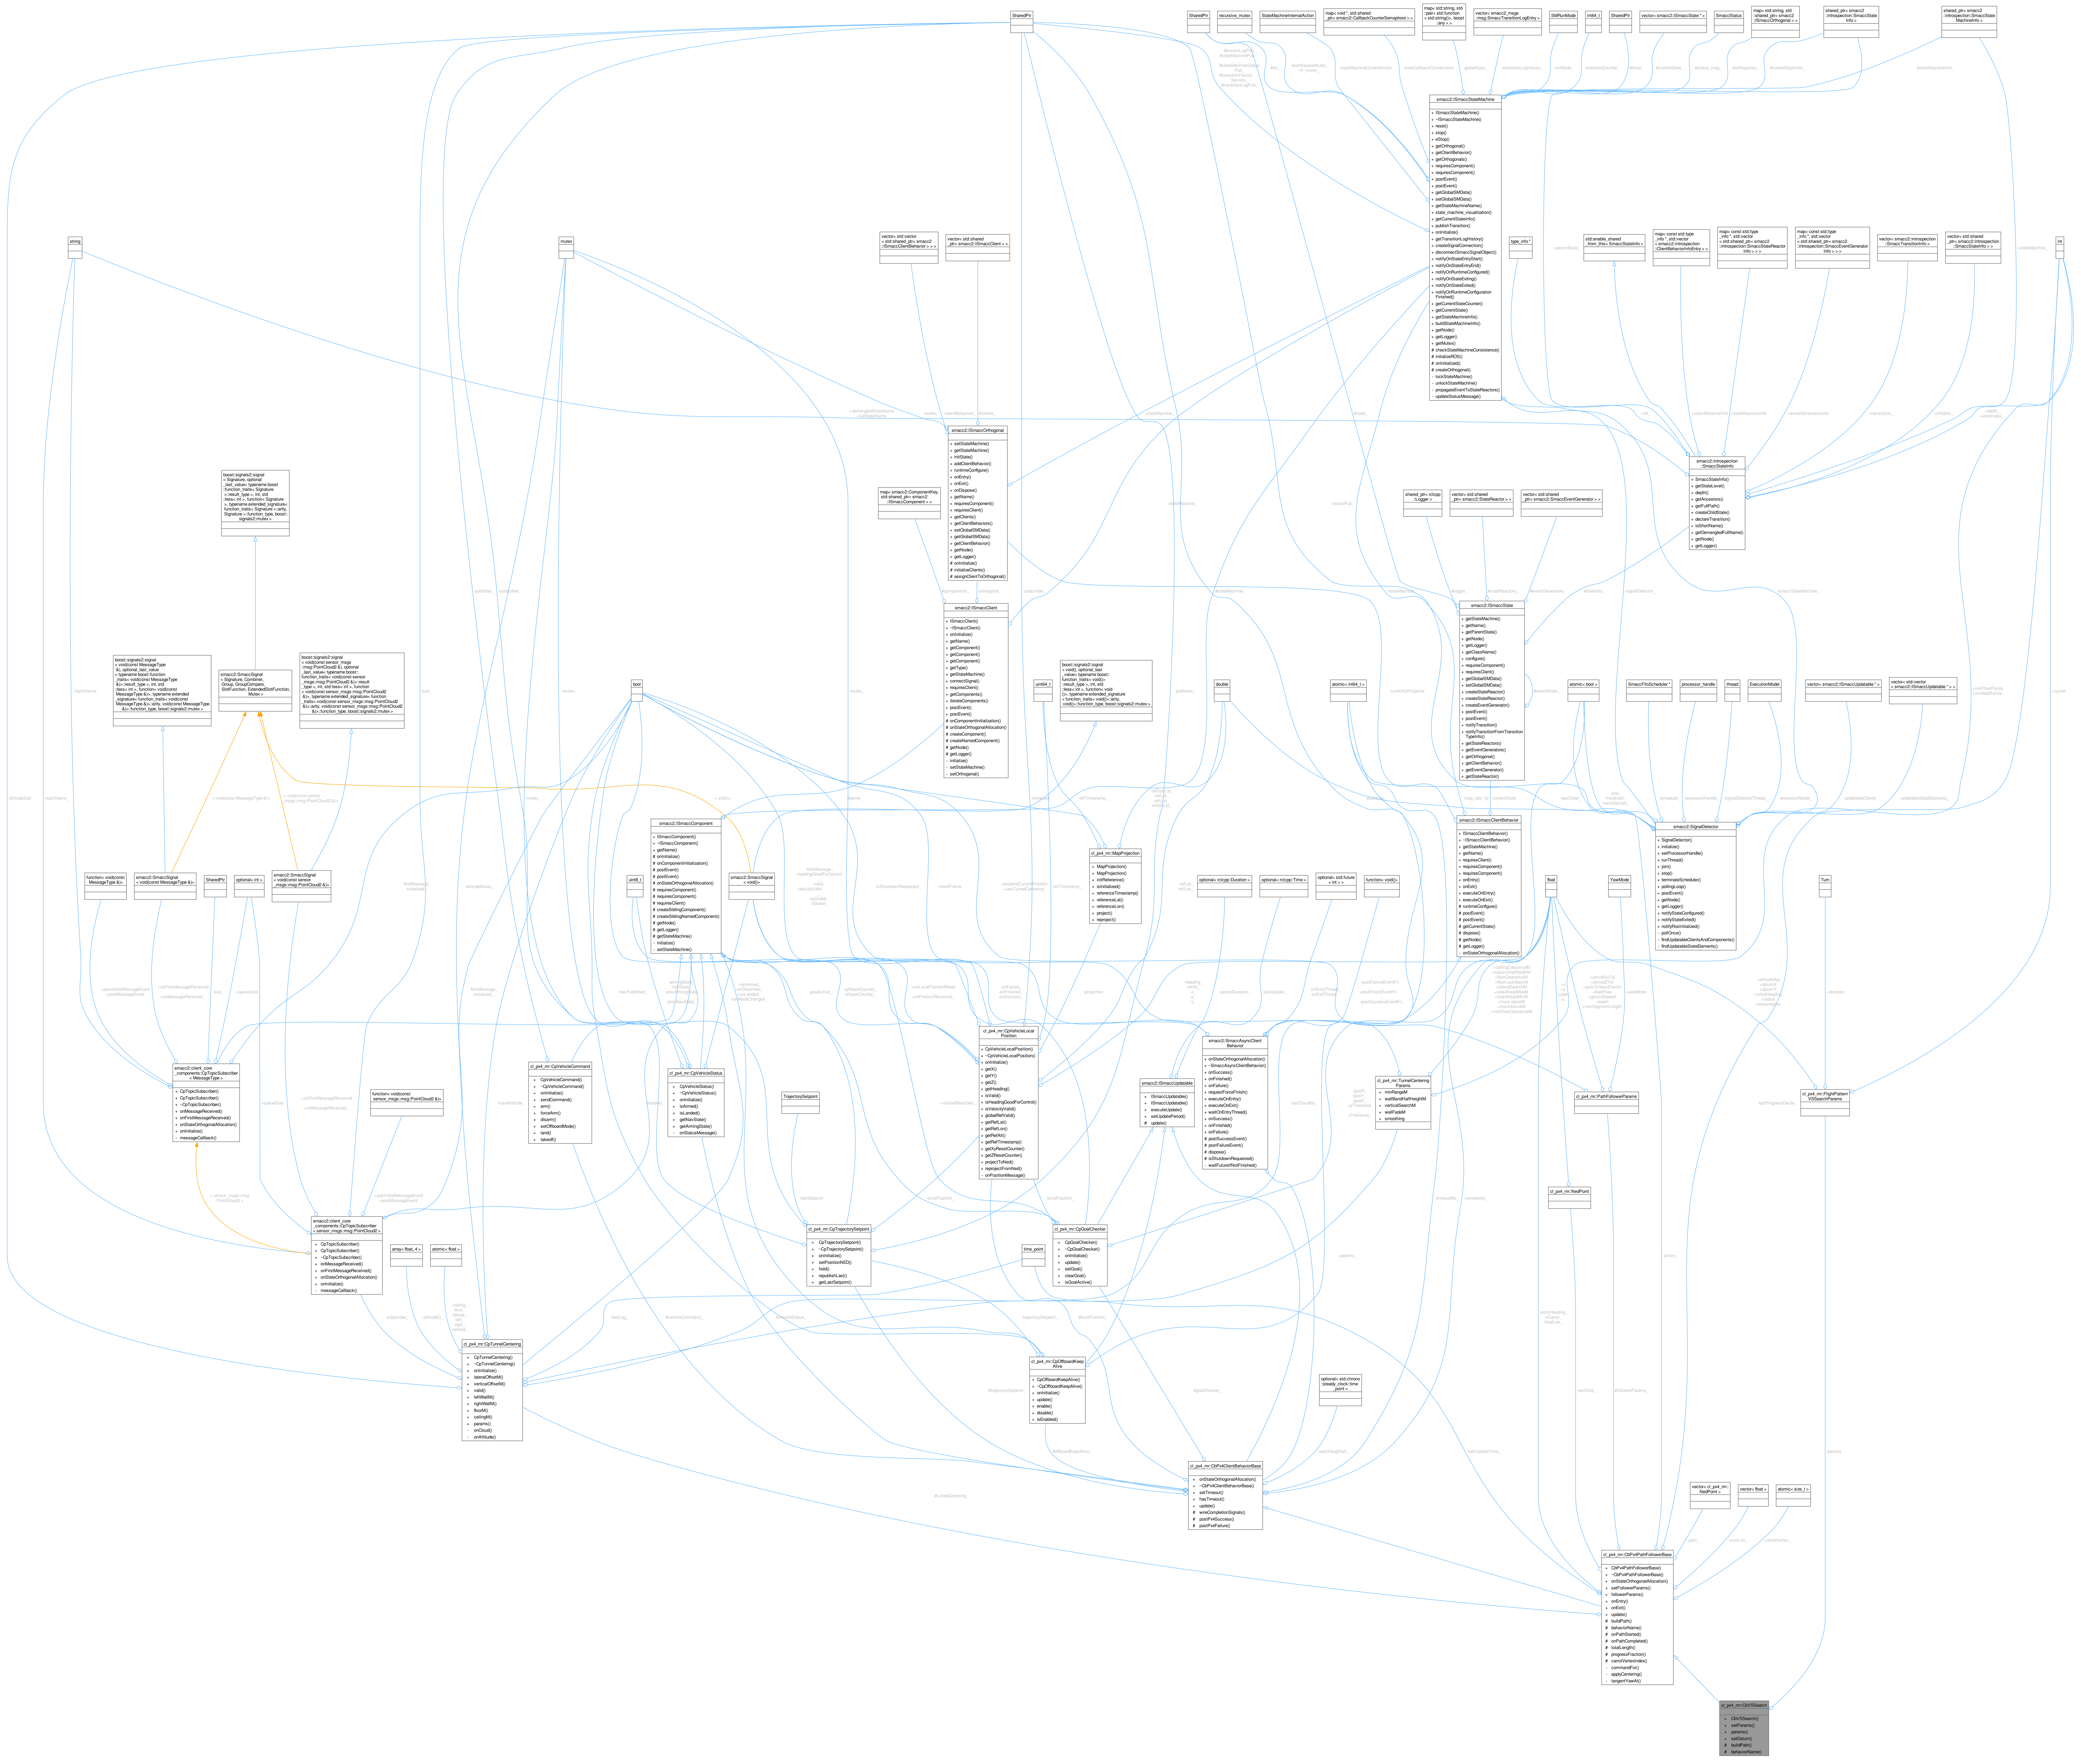
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
map< std::string, std::pair< std::function< std::string()>, boost::any > >
vector< smacc2_msgs::msg::SmaccTransitionLogEntry >
-stateCallbackConnections
-globalData_
-transitionLogHistory_
type_info *
SharedPtr
recursive_mutex
StateMachineInternalAction
SMRunMode
int64_t
SmaccStatus
string
mutex
bool
double
float
int
uint8_t
uint64_t
smacc2::ISmaccOrthogonal
smacc2::ISmaccClient
smacc2::ISmaccComponent
smacc2::ISmaccState
smacc2::ISmaccClientBehavior
smacc2::ISmaccAsyncClientBehavior
smacc2::ISmaccUpdatable
smacc2::SignalDetector
smacc2::introspection::SmaccStateInfo
smacc2::SmaccSignal
cl_px4_mr::MapProjection
cl_px4_mr::CpVehicleLocalPosition
cl_px4_mr::CpVehicleCommand
cl_px4_mr::CpVehicleStatus
cl_px4_mr::CpTrajectorySetpoint
cl_px4_mr::CpGoalChecker
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_px4_mr::CpTunnelCentering
cl_px4_mr::TunnelCenteringParams
cl_px4_mr::PathFollowerParams
cl_px4_mr::FlightPatternVSSearchParams
cl_px4_mr::NedPoint
TrajectorySetpoint
time_point
YawMode
Turn
smacc2::client_core_components::CpTopicSubscriber< MessageType >
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
-trajectorySetpoint_
#localPosition_
#trajectorySetpoint_
#goalChecker_
#offboardKeepAlive_
-watchdogStart_
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
optional< std::chrono::steady_clock::time_point >
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
cl_px4_mr::CbVSSearch
+ CbVSSearch()
+ setParams()
+ params()
+ setDatum()
# buildPath()
# behaviorName()