


smacc2_client_library
/nav2z_client/nav2z_client
/include/nav2z_client/client
_behaviors/cb_navigate_backwards.hpp

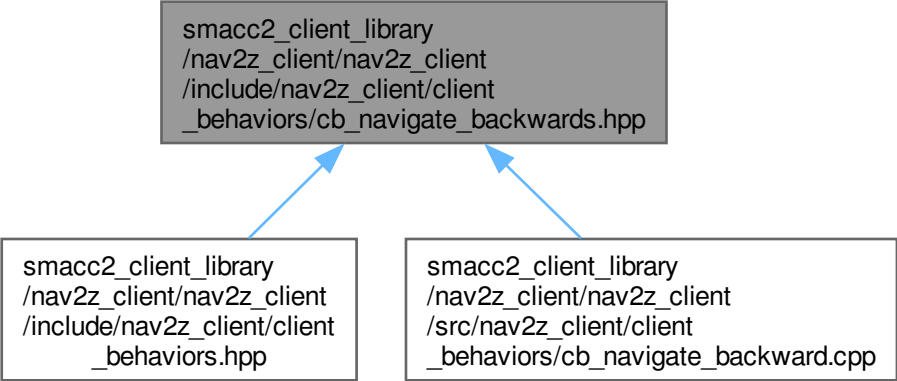

```
graph BT; A["smacc2_client_library  
/nav2z_client/nav2z_client  
/src/nav2z_client/client  
_behaviors/cb_navigate_backward.cpp"] --> C["smacc2_client_library  
/nav2z_client/nav2z_client  
/include/nav2z_client/client  
_behaviors/cb_navigate_backwards.hpp"]; B["smacc2_client_library  
/nav2z_client/nav2z_client  
/include/nav2z_client/client  
_behaviors.hpp"] --> C;
```

The diagram illustrates a dependency relationship between three files in the smacc2_client_library. At the bottom, two boxes represent source files: one for the header file (cb_navigate_backward.hpp) and one for the implementation file (cb_navigate_backward.cpp). Both of these files have blue arrows pointing upwards to a single box at the top, which represents the target header file (cb_navigate_backwards.hpp). This suggests that both the header and the implementation file depend on or include the target header file.

smacc2_client_library
/nav2z_client/nav2z_client
/include/nav2z_client/client
_behaviors.hpp

smacc2_client_library
/nav2z_client/nav2z_client
/src/nav2z_client/client
_behaviors/cb_navigate_backward.cpp