


smacc2\_client\_library  
/moveit2z\_client/include  
/moveit2z\_client/client  
\_behaviors/cb\_pouring\_motion.hpp

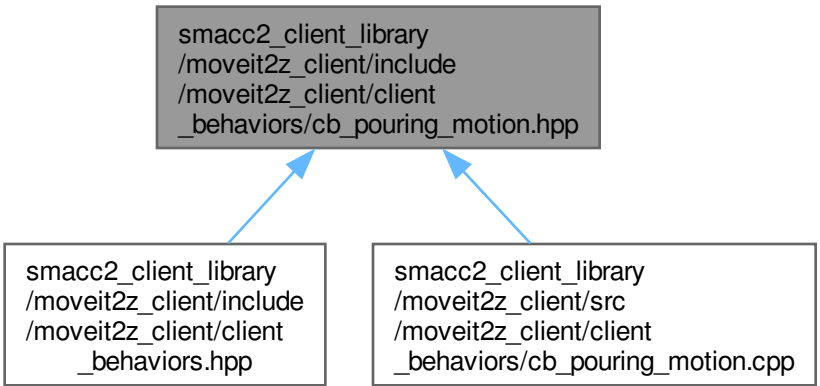

```
graph BT; A["smacc2_client_library<br>/moveit2z_client/include<br>/moveit2z_client/client<br>_behaviors/cb_pouring_motion.hpp"] <--> B["smacc2_client_library<br>/moveit2z_client/include<br>/moveit2z_client/client<br>_behaviors.hpp"]; A <--> C["smacc2_client_library<br>/moveit2z_client/src<br>/moveit2z_client/client<br>_behaviors/cb_pouring_motion.cpp"]
```

smacc2\_client\_library  
/moveit2z\_client/include  
/moveit2z\_client/client  
\_behaviors.hpp

smacc2\_client\_library  
/moveit2z\_client/src  
/moveit2z\_client/client  
\_behaviors/cb\_pouring\_motion.cpp