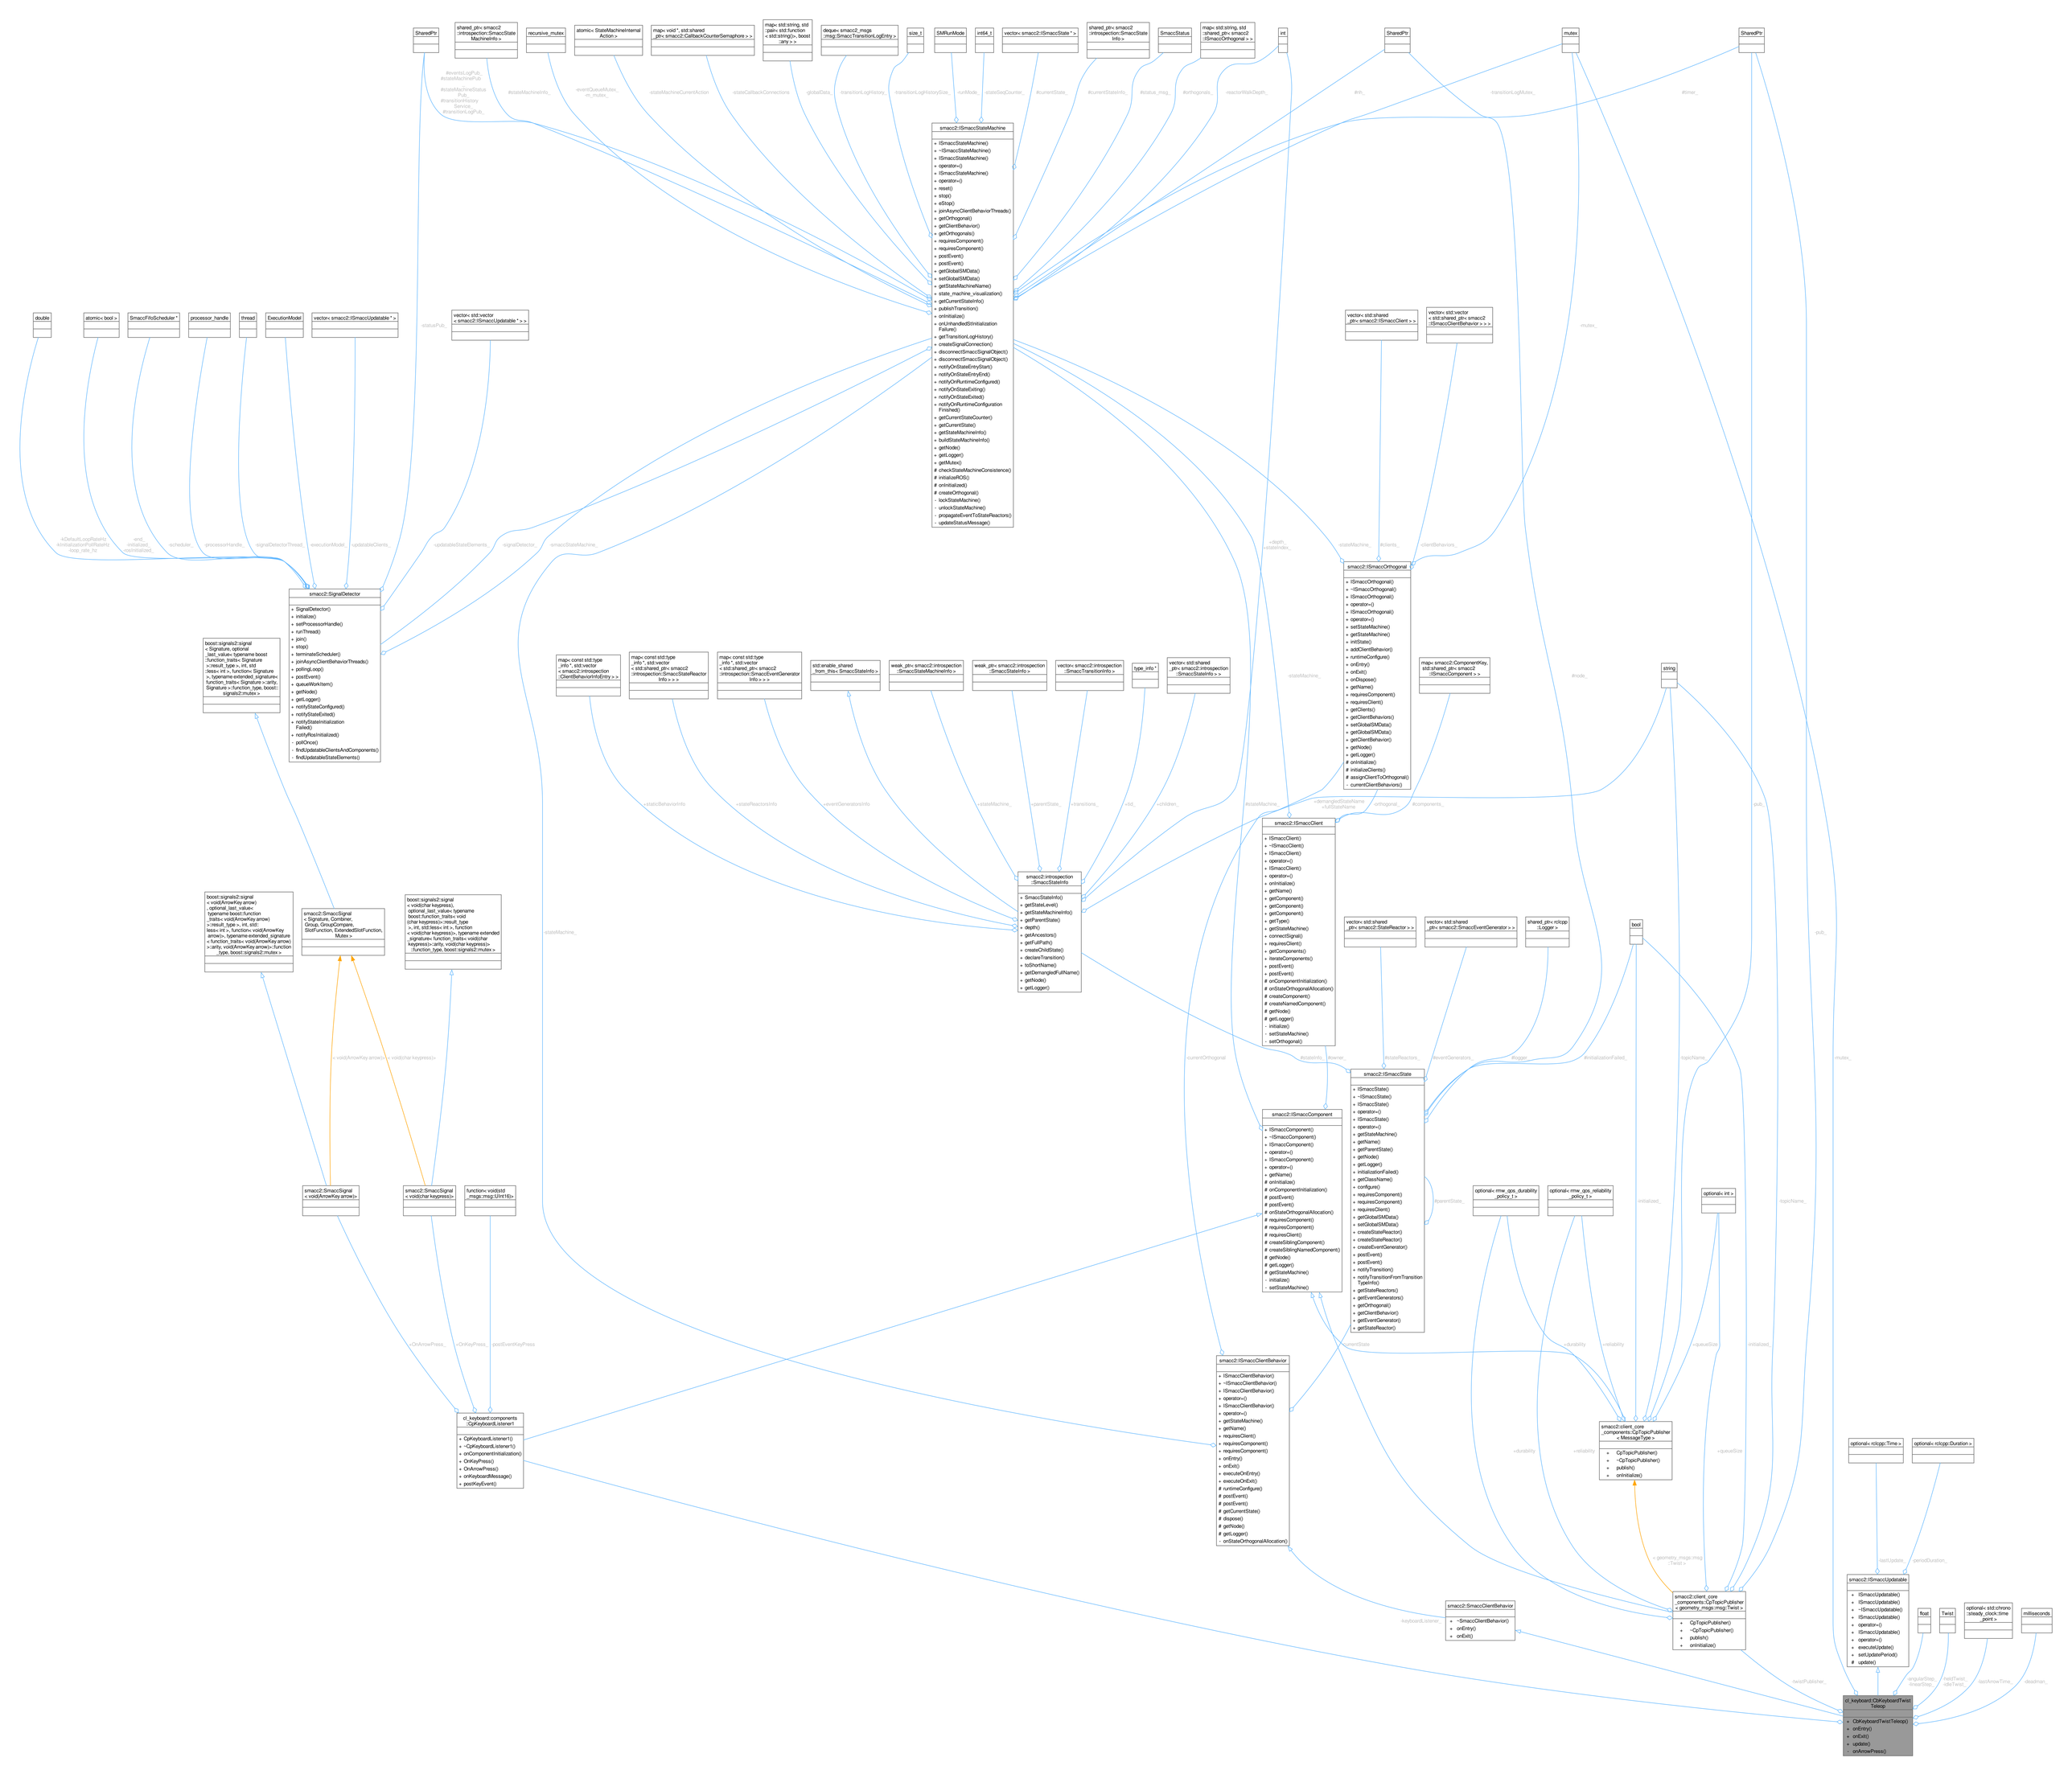
SharedPtr
shared_ptr< smacc2 ::introspection::ISmaccState MachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string()>, boost ::any > >
deque< smacc2_msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::SmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
int
SharedPtr
mutex
SharedPtr
#eventsLogPub_
#stateMachinePub_
#stateMachineStatusPub_
#transitionHistoryService_
#transitionLogPub_
#stateMachineInfo_
#eventQueueMutex_
m_mutex_
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-stateSeqCounter_
#currentState_
#currentStateInfo_
#status_msg_
#orthogonals_
-reactorWalkDepth_
#nh_
-transitionLogMutex_
#timer_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ onUnhandledStInitialization Failure()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector < smacc2::ISmaccUpdatable * > >
vector< std::shared _ptr< smacc2::ISmaccClient > >
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
-statusPub_
-updatableStateElements_
-signalDetector_
-smaccStateMachine_
-depth_
-stateIndex_
-stateMachine_
#clients_
-clientBehaviors_
-mutex_
+DefaultLoopRateHz
+InitializationPollRateHz
-loop_rate_hz
-end_
-initialized_
-postInitialized_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionMode_
-updatableClients_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization Failed()
+ notifyRosInitialized()
+ pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
boost::signals2::signal
< Signature, optional
_last_value< typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity,
Signature >::function_type, boost::
signals2::mutex >
map< const std::type _info *, std::vector < smacc2::introspection ::ClientBehaviorInfoEntry > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccEventGenerator Info > > >
std::enable_shared _from_this< SmaccStateInfo >
weak_ptr< smacc2::introspection ::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection ::SmaccStateInfo >
vector< smacc2::introspection ::SmaccTransitionInfo >
type_info *
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
string
-staticBehaviorInfo
-stateReactorsInfo
-eventGeneratorsInfo
-stateMachine_
-parentState_
-transitions_
-id_
-children_
#stateMachine_
+demangledStateName
+fullStateName
-orthogonal_
#components_
-pub_
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp ::Logger >
bool
boost::signals2::signal
< void(ArrowKey arrow)>
boost::signals2::signal
< void(char keypress)>
smacc2::SmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
-currentOrthogonal
#stateInfo_
#owner_
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ initializationFailed()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#stateReactors_
#eventGenerators_
#logger_
#initializationFailed_
-topicName_
-mutex_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
#parentState_
optional< rmw_qos_durability _policy_t >
optional< rmw_qos_reliability _policy_t >
optional< int >
-initialized_
-topicName_
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
-currentState
+durability_
+reliability_
+queueSize_
-initialized_
smacc2::client_core _components::CpTopicPublisher < MessageType >
+ CpTopicPublisher()
+ ~CpTopicPublisher()
+ publish()
+ onInitialize()
optional< rclcpp::Time >
optional< rclcpp::Duration >
-lastUpdate_
-periodDuration_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ ISmaccUpdatable()
+ operator=()
+ execute(Update)
+ setUpdatePeriod()
# update()
float
Twist
optional< std::chrono ::steady_clock::time _point >
milliseconds
-twistPublisher_
-angularStep_
-linearStep_
-holdTwist_
-rosTwist_
-lastArrowTime_
-deadman_
cl_keyboard::CbKeyboardTwist Teleop
+ CbKeyboardTwistTeleop()
+ onEntry()
+ onExit()
+ update()
+ onArrowPress()
smacc2::SmaccSignal
< void(ArrowKey arrow)>
smacc2::SmaccSignal
< void(char keypress)>
function< void(std ::msgs::msg::UInt16)>
< void(ArrowKey arrow)>
< void(char keypress)>
-OnArrowPress_
-OnKeyPress_
-postEventKeyPress
cl_keyboard::components ::CpKeyboardListener1
+ CpKeyboardListener1()
+ ~CpKeyboardListener1()
+ onComponentInitialization()
+ OnKeyPress()
+ OnArrowPress()
+ onKeyboardMessage()
+ postKeyEvent()
smacc2::ISmaccClientBehavior
+ ~SmaccClientBehavior()
+ onEntry()
+ onExit()
-keyboardListener_
smacc2::client_core _components::CpTopicPublisher < geometry_msgs::msg::Twist >
+ CpTopicPublisher()
+ ~CpTopicPublisher()
+ publish()
+ onInitialize()
< geometry_msgs::msg ::Twist >
-pub_
-mutex_