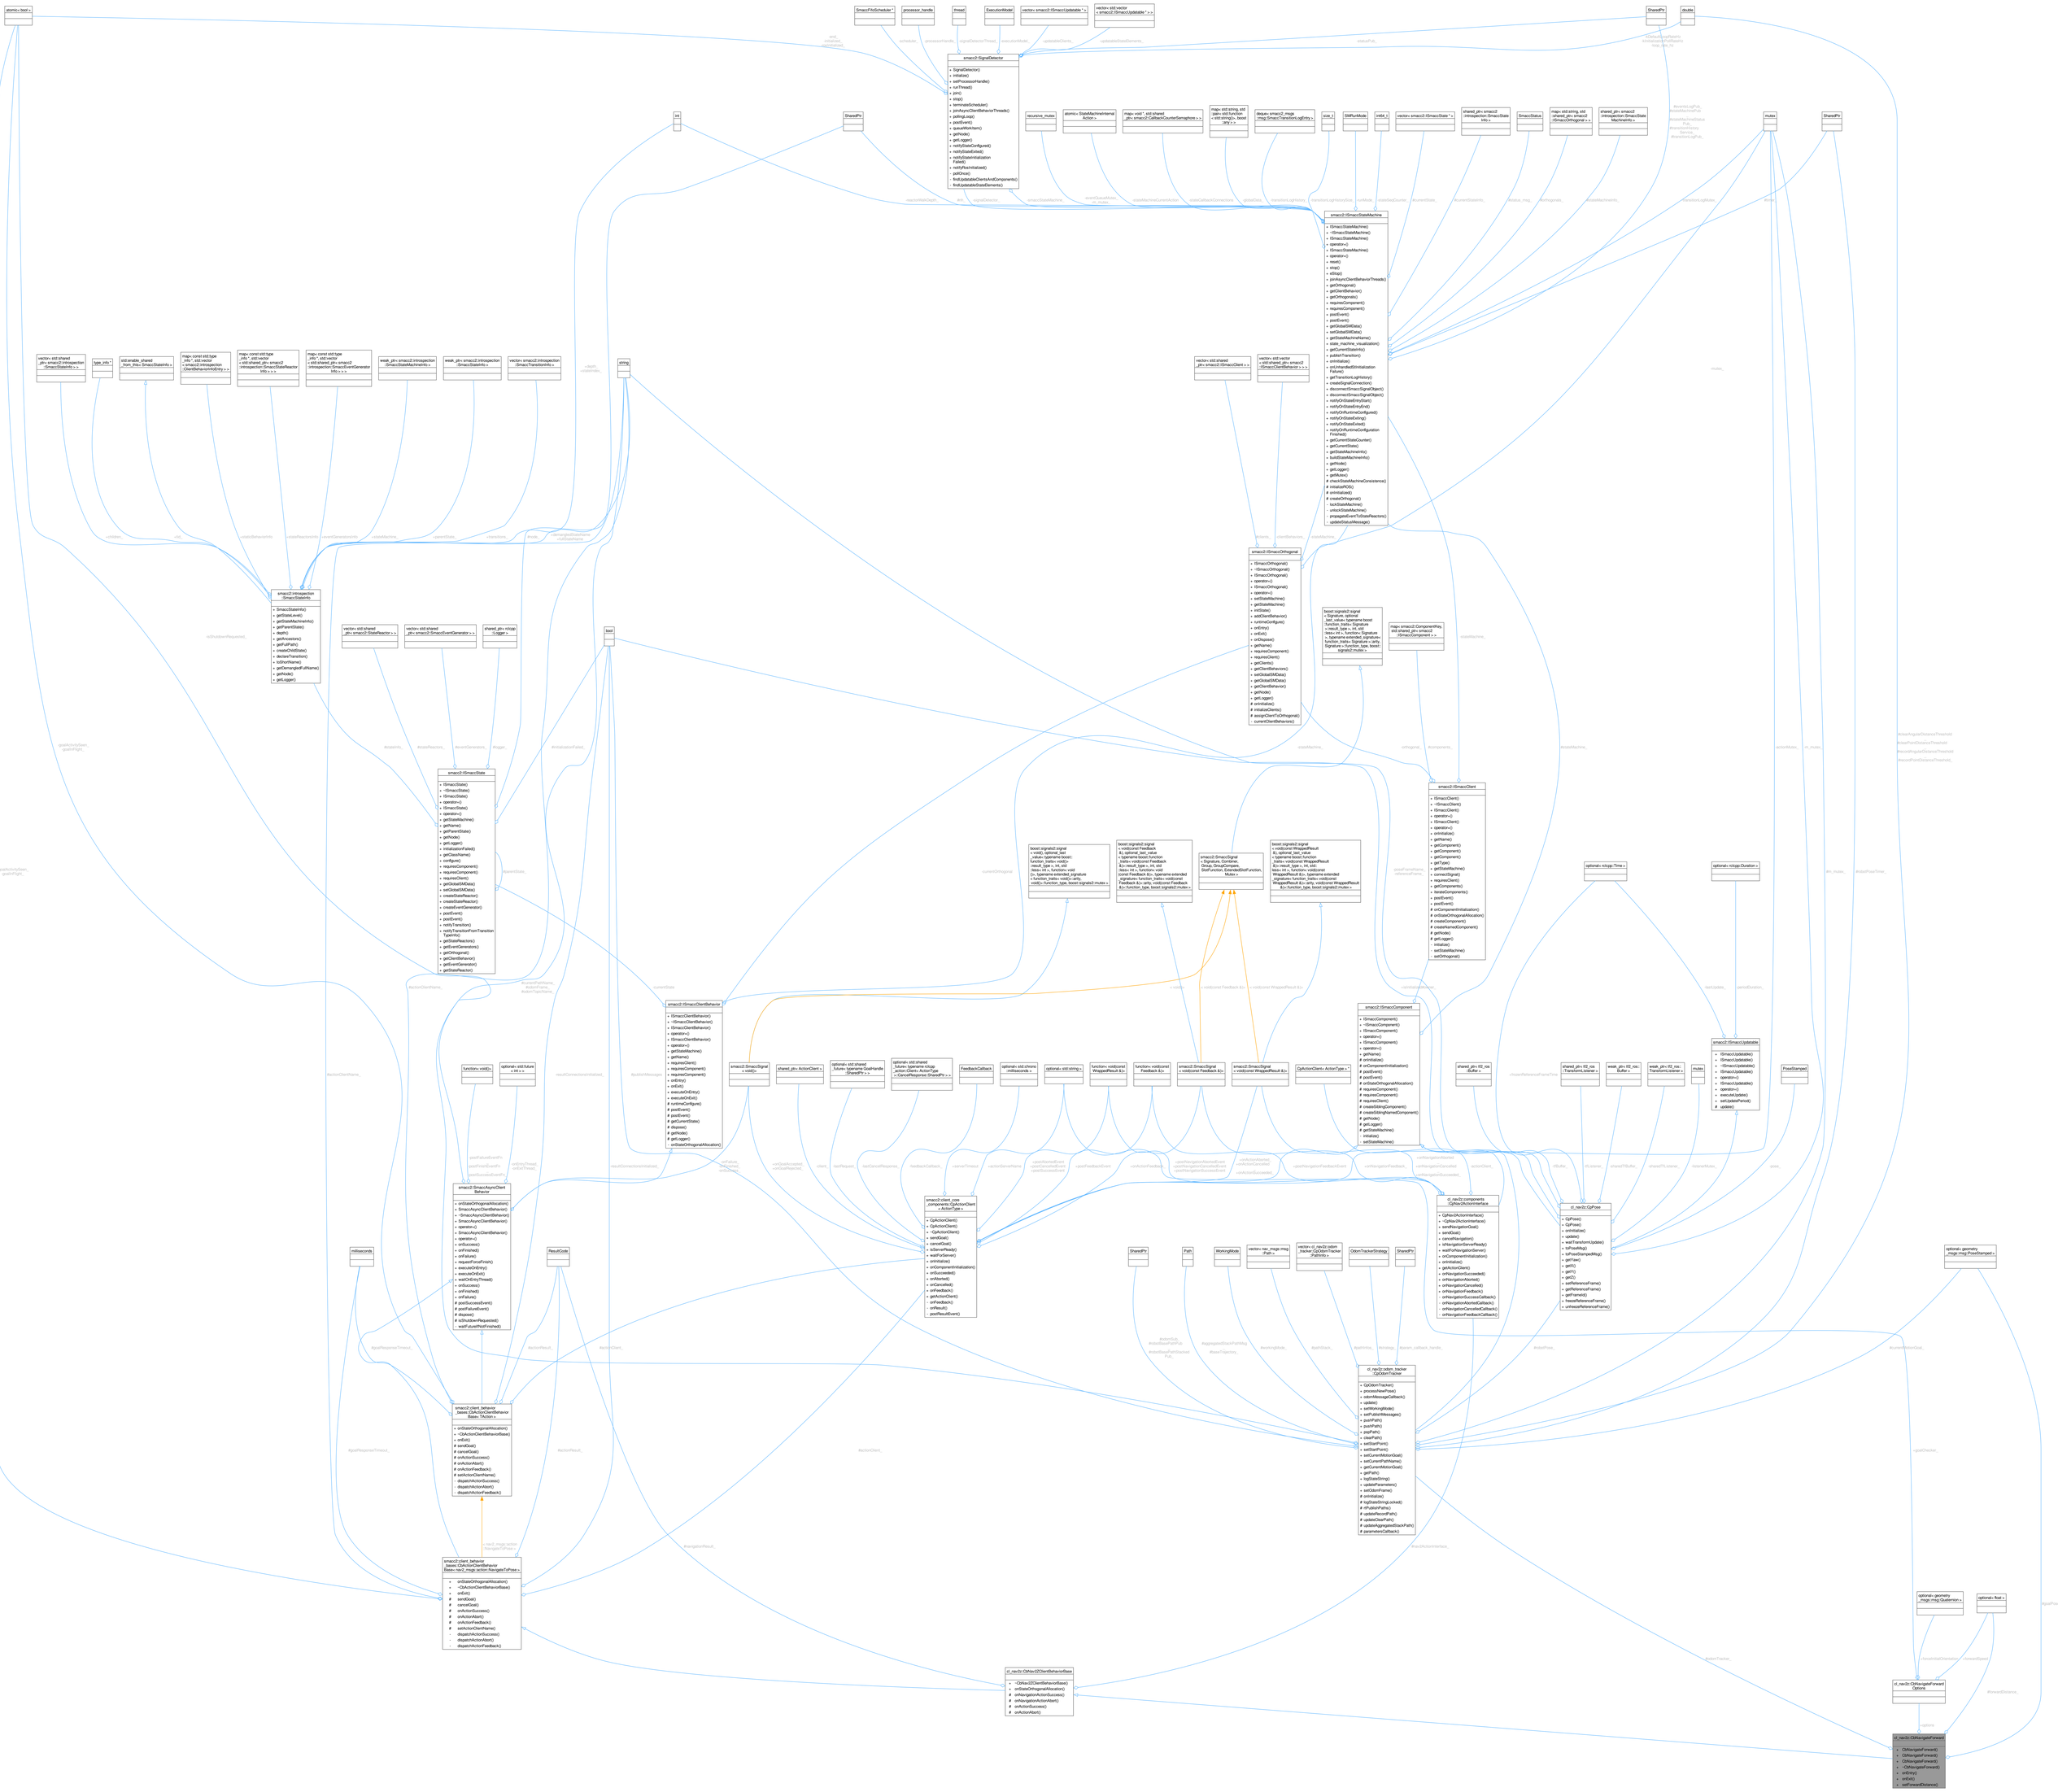
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector < smacc2::ISmaccUpdatable * > >
SharedPtr
double
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ pollAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization Failed()
+ notifyRwInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
int
SharedPtr
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string() >, bool >* >
deque< smacc2::msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRuntiMode
int64_t
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::SmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
shared_ptr< smacc2 ::introspection::SmaccState MachineInfo >
mutex
SharedPtr
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ pollAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentState()
+ publishTransition()
+ onInitialize()
+ onUnhandledStInitialization Failure()
+ getTransitionLogHistory()
+ createSignalConnections()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initialiseROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStateMessage()
vector< std::shared _ptr< smacc2::ISmaccClient > >
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initialiseClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
boost::signals2::signal < Signature, optional _last_value = typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, boost::function < typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost::signals2::mutex >
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getComponent()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ pollAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentState()
+ publishTransition()
+ onInitialize()
+ onUnhandledStInitialization Failure()
+ getTransitionLogHistory()
+ createSignalConnections()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initialiseROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStateMessage()
vector< std::shared _ptr< smacc2::StateInfo > >
type_info *
std::enable_shared _from_this< SmaccStateInfo >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccEventGenerator Info > > >
weak_ptr< smacc2::introspection ::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection ::SmaccStateInfo >
vector< smacc2::introspection ::SmaccTransitionInfo >
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp ::Logger >
boost
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ initializeFailed()
- getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
boost::signals2::signal < void(), optional_last _value< typename boost:: function_traits < void()> ::result_type >, int, std ::less< int >, boost::function < typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const Feedback &)>, optional_last_value < typename boost::function < function_traits < void(const Feedback &)>::arity, void(const Feedback &)>::function_type, boost::signals2::mutex >
smacc2::ISmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, SlotRefType >
boost::signals2::signal < void(const WrappedResult &), optional_last_value < typename boost::function < function_traits < void(const WrappedResult &)>::arity, void(const WrappedResult &)>::function_type, boost::signals2::mutex >
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
+ onInitialize()
+ onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
optional< rclcpp::Time >
optional< rclcpp::Duration >
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ executeUpdate()
+ setUpdatePeriod()
# update()
PoseStamped
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
function< void()>
optional< std::future < int > >
smacc2::SmaccSignal < void()>
shared_ptr< ActionClient >
optional< std::shared _future< typename GoalHandle ::SharedPtr > >
optional< std::shared _future< typename rclcpp ::action::Client< ActionType >::CancelResponse::SharedPtr > >
FeedbackCallback
optional< std::chrono ::milliseconds >
optional< std::string >
function< void(const WrappedResult &)>
function< void(const Feedback &)>
smacc2::SmaccSignal < void(const Feedback &)>
smacc2::SmaccSignal < void(const WrappedResult &)>
CpActionClient< ActionType >
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ executeUpdate()
+ setUpdatePeriod()
# update()
shared_ptr< tf2_ros ::Buffer >
shared_ptr< tf2_ros ::TransformListener >
weak_ptr< tf2_ros:: Buffer >
weak_ptr< tf2_ros:: TransformListener >
mutex
millisecond
ResultCode
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestFinishFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::client_core _components::CpActionClient < ActionType >
+ CpActionClient()
+ CpActionClient()
+ ~CpActionClient()
+ sendGoal()
+ cancelGoal()
+ isServerReady()
+ waitForServer()
+ onInitialize()
+ onComponentInitialization()
+ onSucceeded()
+ onAborted()
+ onCancelled()
+ onFeedback()
+ getActionClient()
- onFeedback()
- onResult()
- postResultEvent()
SharedPtr
Path
WorkingMode
vector< nav _msgs::msg ::Path >
vector< cl_nav2z::odom _tracker::CpOdomTracker ::PathInfo >
OdomTrackerStrategy
SharedPtr
cl_nav2z::components ::CpNav2zActionInterface
+ CpNav2zActionInterface()
+ ~CpNav2zActionInterface()
+ sendNavigationGoal()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCancelled()
+ onNavigationFeedback()
+ onNavigationSuccessCallback()
+ onNavigationAbortedCallback()
+ onNavigationCancelledCallback()
+ onNavigationFeedbackCallback()
cl_nav2z::CpPose
+ CpPose()
+ CpPose()
+ onInitialize()
+ update()
+ waitTransformUpdate()
+ toPoseMsg()
+ toPoseStampedMsg()
+ getFrame()
+ getX()
+ getY()
+ getZ()
+ setReferenceFrame()
+ getReferenceFrame()
+ getFrameId()
+ freezeReferenceFrame()
+ unfreezeReferenceFrame()
optional< geometry _msgs::msg::PoseStamped >
smacc2::client_behavior _bases::CbActionClientBehavior Base< TAction >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
cl_nav2z::odom_tracker ::CpOdomTracker
+ CpOdomTracker()
+ processNewPose()
+ odomMessageCallback()
+ update()
+ setWorkingMode()
+ setPublishMessages()
+ pushPath()
+ pushPath()
+ pushPath()
+ clearPath()
+ setStartPoint()
+ setStartPoint()
+ setCurrentMotionGoal()
+ setCurrentPathName()
+ getCurrentMotionGoal()
+ getPath()
+ togStateString()
+ updateParameters()
+ setOdomFrame()
# onInitialize()
# togStateString(Locked()
# rPublishPaths()
# updateRecordPath()
# updateClearPath()
# updateAggregatedStackPath()
# parametersCallback()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::NavigateToPose >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
cl_nav2z::ClNav2zClientBehaviorBase
+ ~ClNav2zClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAborted()
# onActionSuccess()
# onActionAbort()
optional< geometry _msgs::msg::Quaternion >
optional< float >
cl_nav2z::ClNavigateForward Options
cl_nav2z::ClNavigateForward
+ ClNavigateForward()
+ ClNavigateForward()
+ ClNavigateForward()
+ ~ClNavigateForward()
+ onEntry()
+ onExit()
- setForwardDistance()