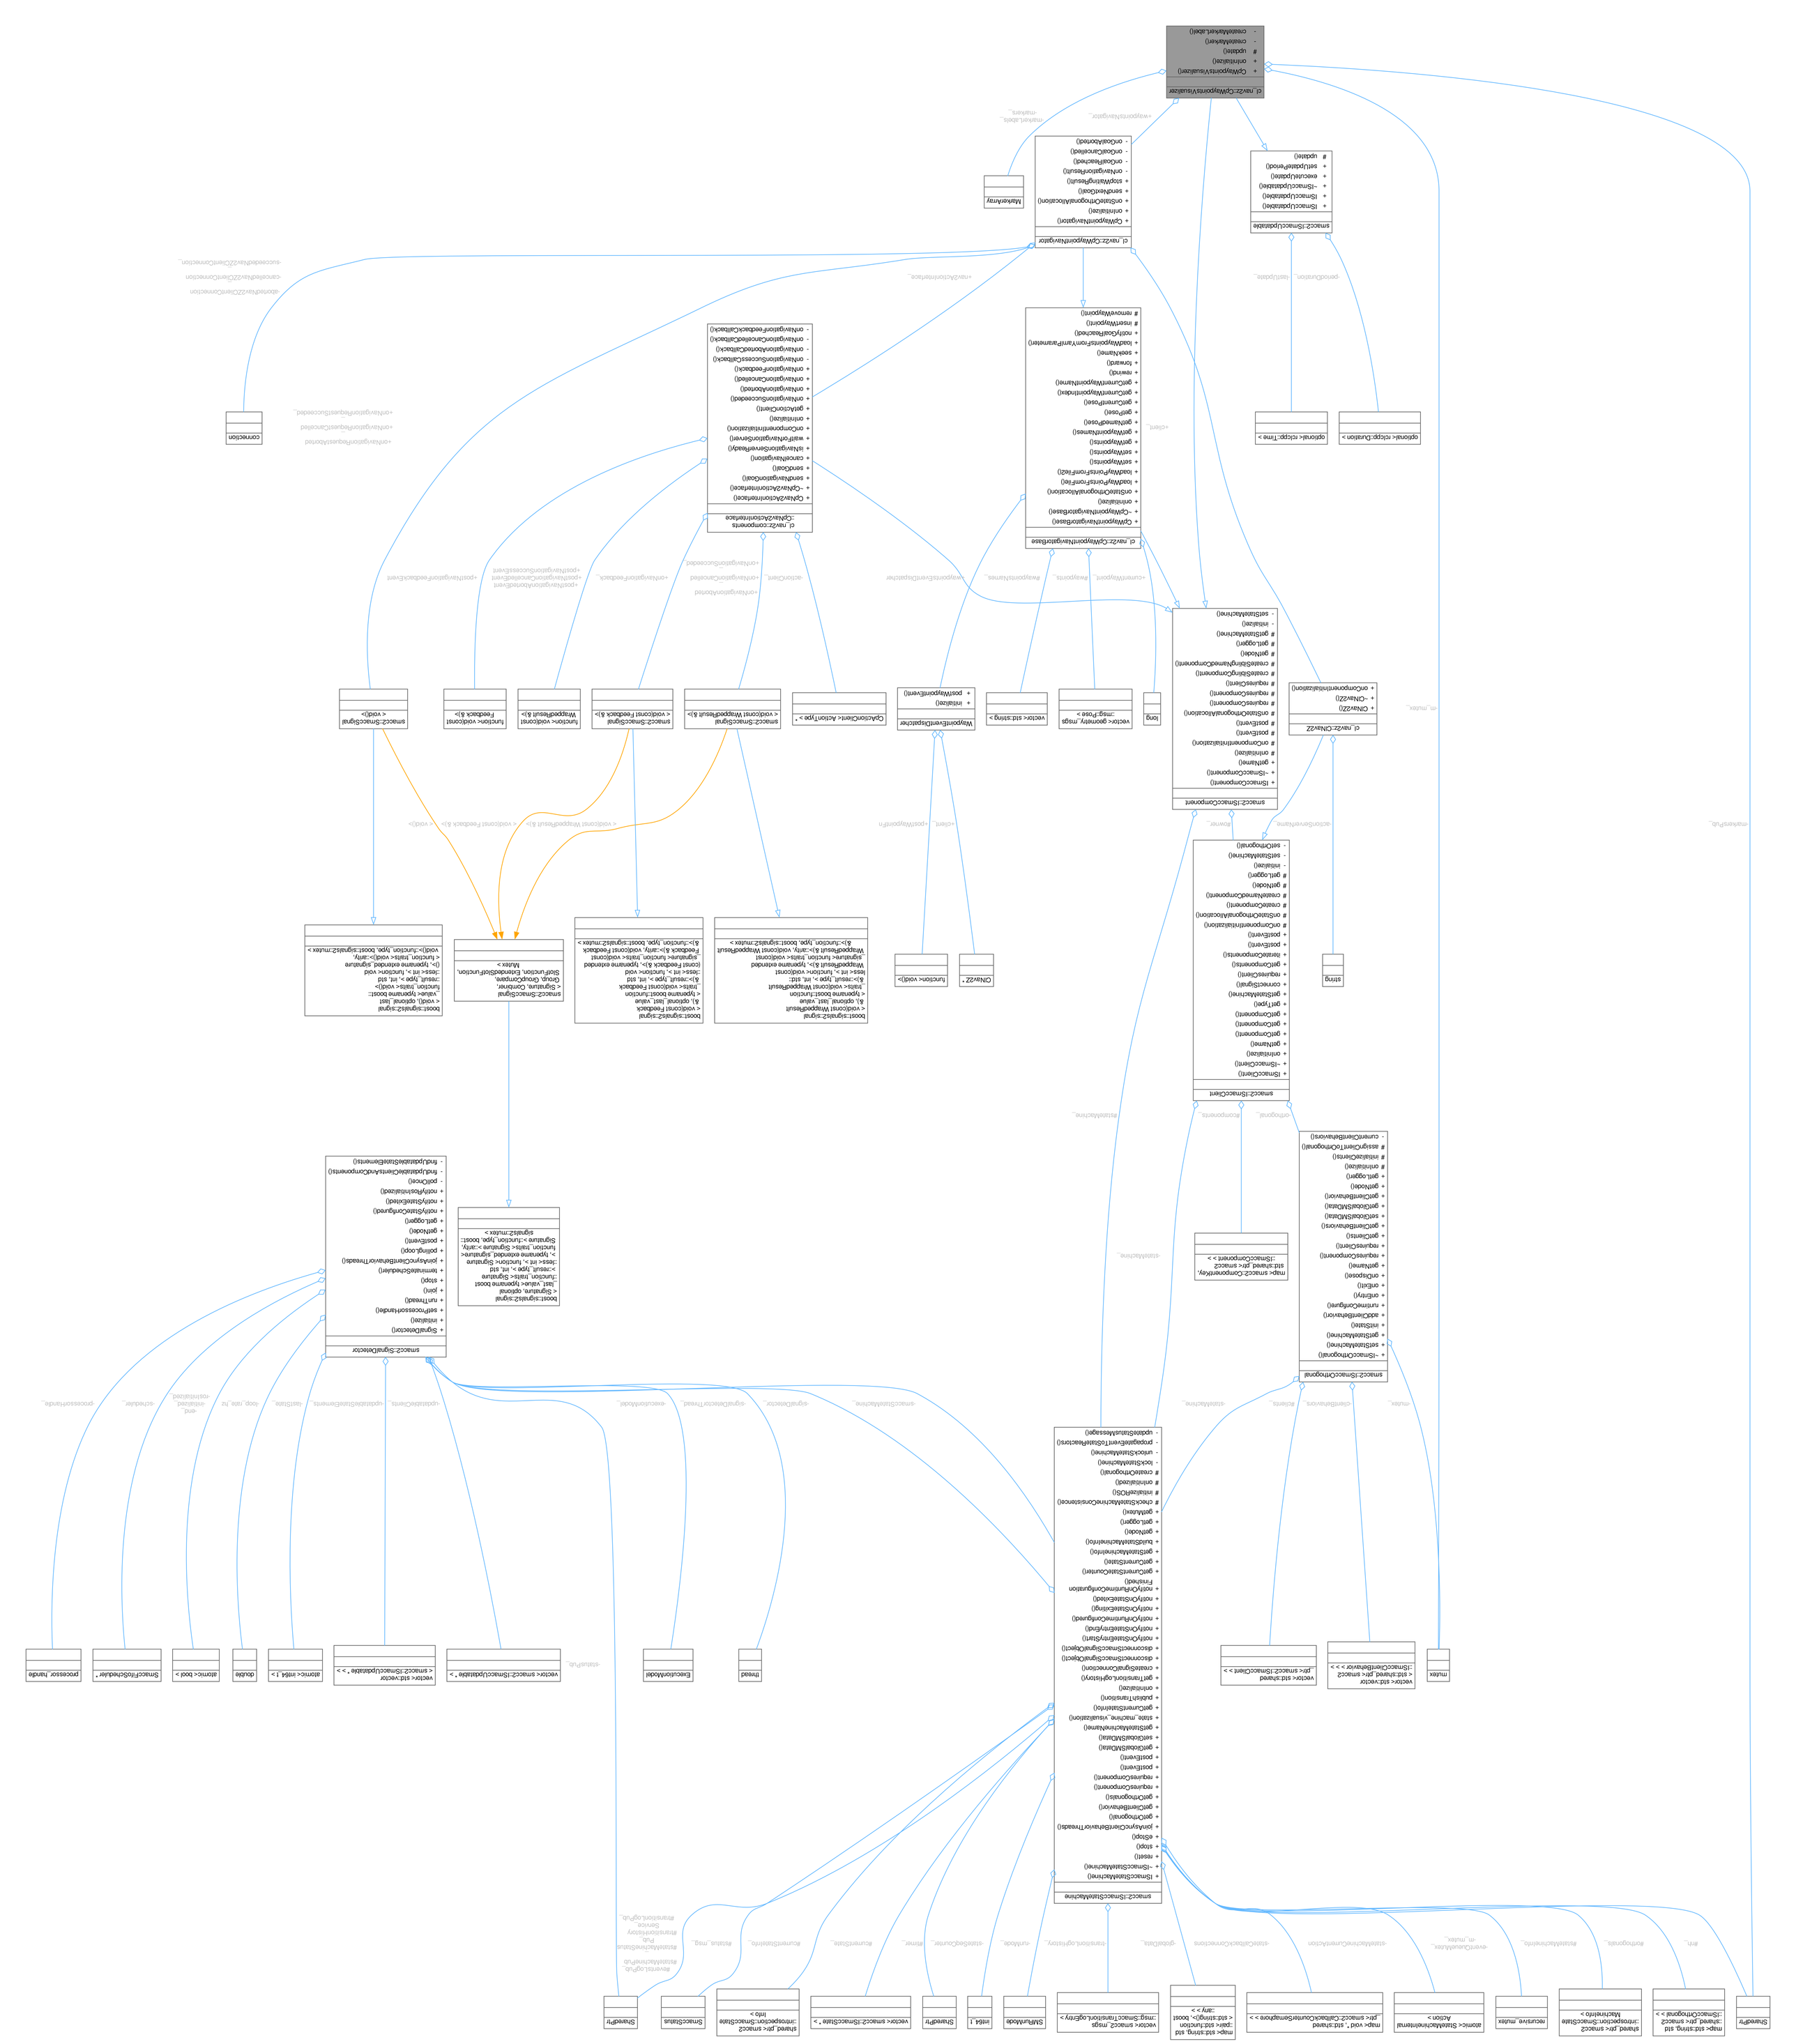
cl_nav2z::CQMyWaypointsVisualizer
+ CQMyWaypointsVisualizer()
+ onInitialize()
# update()
- createAMarker()
- createAMarker_abs()
cl_nav2z::CQMyWaypointNavigator
+ CQMyWaypointNavigator()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ sendNextGoal()
+ stopWaitingResult()
- onNavigationResult()
- onGoalReached()
- onGoalCancelled()
- onGoalAborted()
MarkerArray
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
cl_nav2z::CNav2Z
+ CNav2Z()
+ ~CNav2Z()
+ onComponentInitialization()
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# requiresComponent()
# requiresComponent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresClient()
# createSlidingComponent()
# createSlidingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
# getLogger()
# getNode()
+ getStateMachine()
+ setStateMachine()
- initialize()
- setOrthogonal()
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ postEvent()
+ iterateComponents()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
cl_nav2z::CQMyWaypointNavigatorBase
+ CQMyWaypointNavigatorBase()
+ ~CQMyWaypointNavigatorBase()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ loadWaypointsFromFile()
+ loadWaypointsFromFile2()
+ setWaypoints()
+ setWaypoints()
+ getWaypoints()
+ getWaypointNames()
+ getNamedPose()
+ getPose()
+ getCurrentPose()
+ getCurrentWaypointIndex()
+ getCurrentWaypointName()
+ rewind()
+ forward()
+ seekName()
+ loadWaypointsFromYamlParameter()
+ notifyGoalReached()
# insertWaypoint()
# removeWaypoint()
cl_nav2z::CQMyWaypointNavigator
+ CQMyWaypointNavigator()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ sendNextGoal()
+ stopWaitingResult()
- onNavigationResult()
- onGoalReached()
- onGoalCancelled()
- onGoalAborted()
cl_nav2z::components
::CQNav2ActionInterface
+ CQNav2ActionInterface()
+ ~CQNav2ActionInterface()
+ sendNavigationGoal()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCancelled()
+ onNavigationFeedback()
- onNavigationSuccessCallback()
- onNavigationAbortedCallback()
- onNavigationCancelledCallback()
- onNavigationFeedbackCallback()
connection
smacc2::SmaccSignal
< signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(), optional_last
_value< typename boost::
result_type >, int, std
::less< int >, function< void
(boost::any const&) >, std
::allocator< void() >
function_traits< void()>::arity,
true, typename extended_signature
< function_traits< void()>::arity,
(>, typename extended_signature
< function_type, boost::signals2::mutex >
boost::signals2::signal
< void(const Feedback
< typename boost::function
< typename boost::function
traits< void(const Feedback
:less< int >, function< void
(const Feedback &)>, typename extended
signature< function_traits< void(const
Feedback &)>::arity, void(const Feedback
&)>::function_type, boost::signals2::mutex >
boost::signals2::signal
< void(const WrappedResult
< typename boost::function
< typename boost::function
traits< void(const WrappedResult
:less< int >, function< void
(const WrappedResult &)>, typename extended
signature< function_traits< void(const
WrappedResult &)>::arity, void(const WrappedResult
&)>::function_type, boost::signals2::mutex >
CNav2Z *
function< void()>
optional< rclcpp::Time >
optional< rclcpp::Duration >
vector< geometry_msgs
::msg::Pose >
vector< std::string >
long
CActionClient< ActionType > *
WaypointEventDispatcher
+ initialize()
+ postWaypointEvent()
smacc2::SmaccSignal
< void(const WrappedResult &)>
smacc2::SmaccSignal
< void(const Feedback &)>
function< void(const
WrappedResult &)>
function< void(const
Feedback &)>
smacc2::SmaccSignal
< void()>
string
mutex
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
vector< std::shared
_ptr< smacc2::ISmaccClient > >
ExecutionModel
thread
vector< smacc2::ISmaccUpdatable * >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
double
atomic< bool >
atomic< int64_t >
processor_handle
SmaccFifoScheduler *
smacc::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ numThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableStateAndComponents()
- findUpdatableStateElements()
boost::signals2::signal
< SignalType, optional
_last_value< typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>::arity, true, typename extended_signature
< typename boost::function_traits
< Signature >::function_type, boost::
signals2::mutex >
shared_ptr< smacc2
::introspection::SmaccStateMachineInfo >
vector< smacc2::ISmaccState * >
SmaccState
SharedPtr
int64_t
SMFunMode
vector< smacc2_msgs
::msg::SmaccTransitionLogEntry >
map< std::string, std
::pair< std::function
< std::string() >, boost
::any > >
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
atomic< StateMachineInternal
Action >
recursive_mutex
shared_ptr< smacc2
::introspection::SmaccStateMachineInfo >
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
SharedPtr
smacc::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ numThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableStateAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ duplicateTransition()
+ initialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnHuntimeConfigured()
+ notifyOnHuntimeConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getName()
+ getLogger()
+ getNode()
+ getMutex()
- checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
boost::signals2::signal
< last_value< typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>::arity, true, typename extended_signature
< typename boost::function_traits
< Signature >::function_type, boost::
signals2::mutex >
SharedPtr
SmaccState
shared_ptr< smacc2
::introspection::SmaccStateInfo >
vector< smacc2::ISmaccState * >
SharedPtr
int64_t
SMFunMode
vector< smacc2_msgs
::msg::SmaccTransitionLogEntry >
map< std::string, std
::pair< std::function
< std::string() >, boost
::any > >
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
atomic< StateMachineInternal
Action >
recursive_mutex
shared_ptr< smacc2
::introspection::SmaccStateMachineInfo >
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
SharedPtr
#m_
#orthogonals_
#stateMachineInfo_
#eventQueueMutex_
-m_mutex_
#stateMachineCurrentAction
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-numNode_
-stateSeqCounter_
#timer_
#currentState_
#currentStateInfo_
#status_msg_
#stateMachineStatus
Pub_
#transitionHistory
Service_
#transitionLogPub_
#eventLogPub
#stateMachineInfoPub
-processorHandle_
-scheduler_
-initialized_
-end
-initialized_
-loop_rate_hz_
-lastState_
-updatableStateElements_
-updatableClients_
-executionModel_
-signalDetectorThread_
-signalDetector_
-smaccStateMachine_
< void()>
< void(const Feedback &)>
< void(const WrappedResult &)>
#client_
+postWaypointFi
+navActionInterface_
-abortedNav2ZClientConnection
-cancelledNav2ZClientConnection
-succeededNav2ZClientConnection_
+onNavigationRequestAborted
+onNavigationRequestCancelled
+onNavigationRequestSucceeded_
+postNavigationFeedbackEvent
+postNavigationAbortedEvent
+postNavigationCancelledEvent
+postNavigationSuccessEvent
+onNavigationFeedback_
+onNavigationAborted
+onNavigationCancelled
+onNavigationSucceeded
-actionClient_
#waypointsEventDispatcher
#waypointsNames_
#waypoints_
+currentWaypoint_
+client_
-stateMachine_
-orthogonal_
#components_
#stateMachine_
-actionServerName_
#owner_
-periodDuration_
-lastUpdate_
-markers_pub_
-m_mutex_