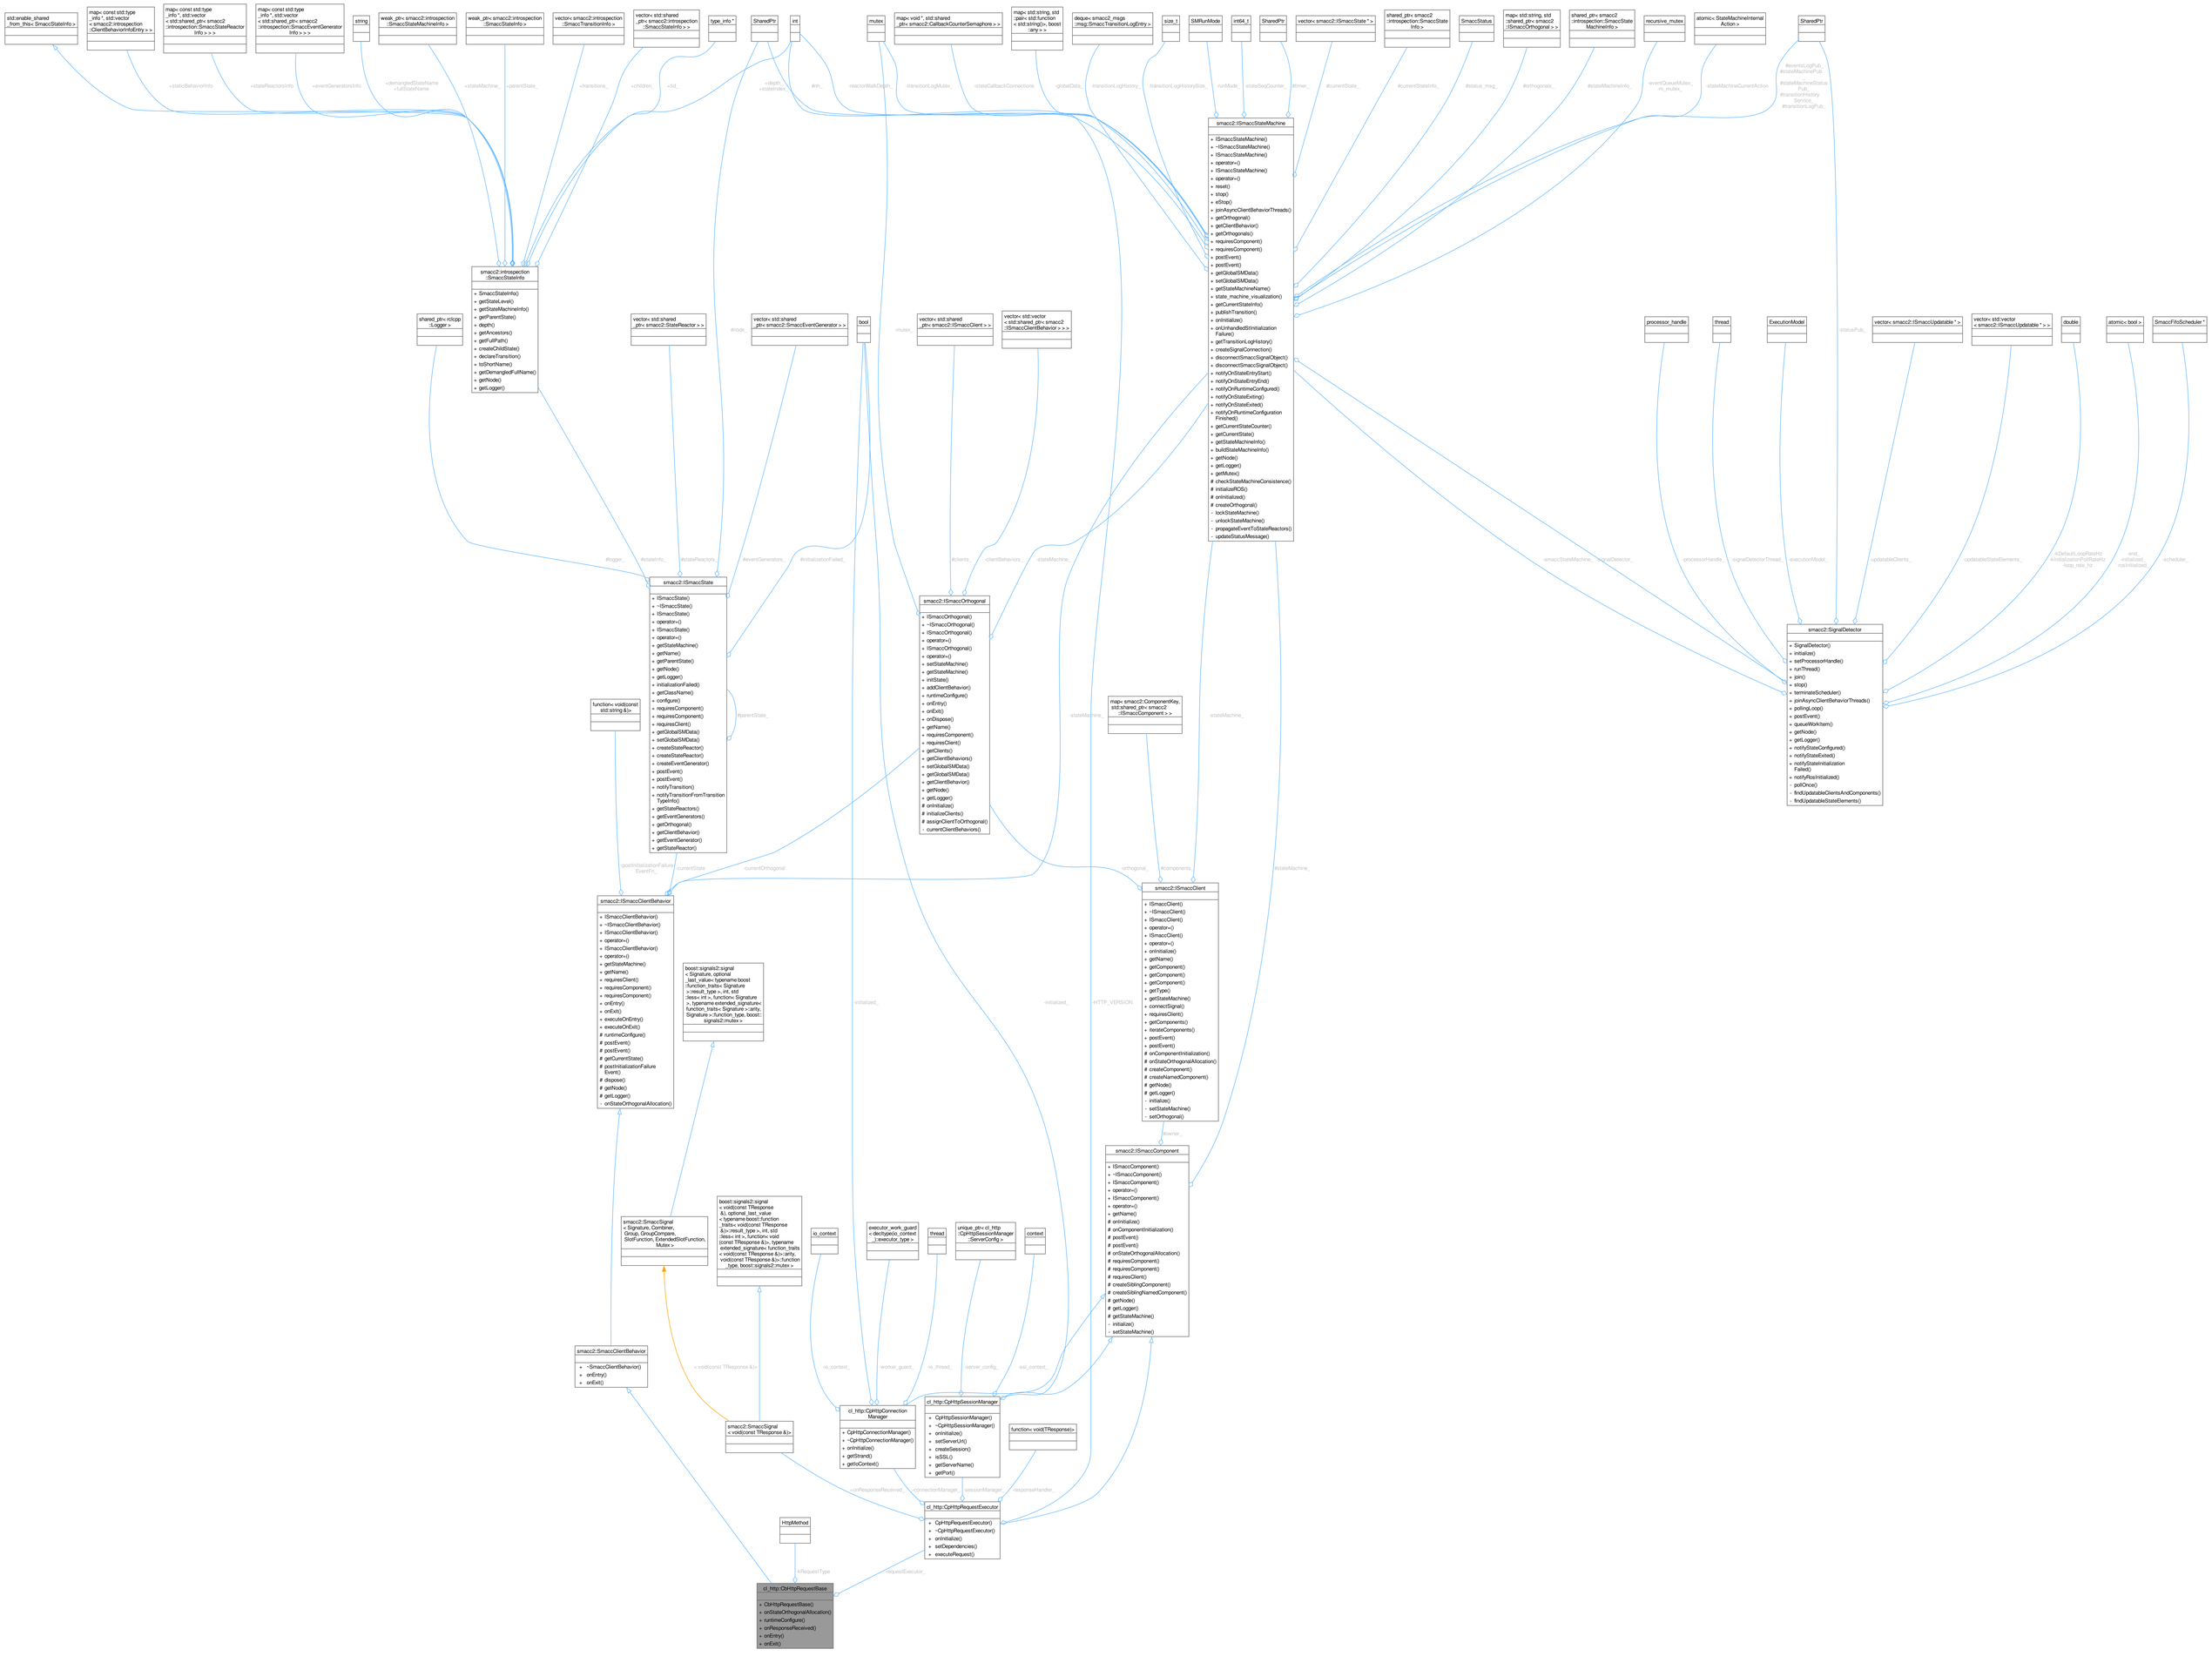
std::enable_shared
_from_this< SmaccStateInfo >
map< const std::type
_info *, std::vector
< smacc2::introspection
::ClientBehaviorInfoEntry > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccStateReactor
Info > > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccEventGenerator
Info > > >
string
weak_ptr< smacc2::introspection
::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection
::SmaccStateInfo >
vector< smacc2::introspection
::SmaccTransitionInfo >
vector< std::shared
_ptr< smacc2::introspection
::SmaccStateInfo* > >
type_info *
SharedPtr
int
mutex
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std
::pair< std::function
< std::string() >, boost
::any > >
deque< smacc2_msgs
::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2
::introspection::SmaccState
Info >
SmaccStatus
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
shared_ptr< smacc2
::introspection::SmaccState
MachineInfo >
recursive_mutex
atomic< StateMachineInternal
Action >
SharedPtr
#eventsLogPub_
#stateMachinePub
#stateMachineStatus
Pub_
#transitionHistory
Service_
#transitionLogPub_
-staticBehaviorInfo
-stateReactorsInfo
-eventGeneratorsInfo
+demangledStateName
+fullStateName
-stateMachine_
-parentState_
-transitions_
-children_
-id_
-depth_
+stateIndex_
#rh_
-reactorWalkDepth_
-transitionLogMutex_
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-stateSeqCounter_
#mar_
-currentState_
-currentStateInfo_
-status_msg_
-orthogonals_
-stateMachineInfo_
-eventQueueMutex_
-m_mutex_
-stateMachineCurrentAction
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ onUnhandledStInitialization
Failure()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection
::ISmaccStateInfo
+ ISmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
shared_ptr< rclcpp
::Logger >
vector< std::shared
_ptr< smacc2::StateReactor > >
vector< std::shared
_ptr< smacc2::SmaccEventGenerator > >
bool
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
double
atomic< bool >
SmaccFifoScheduler *
-logger_
-stateInfo_
-stateReactors_
#eventGenerators_
-initializationFailed_
#node_
-mutex_
-stateMachine_
-smaccStateMachine_
-signalDetector_
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-updatableStateElements_
-isDefaultLoopRateHz
-isInitializationPrdRateHz
-loop_rate_hz
-end_
-initialized_
-isInitialized_
-scheduler_
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ initializationFailed()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition
TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization
Failed()
+ notifyRosInitialized()
+ pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
#clients_
-clientBehaviors_
-stateMachine_
-orthogonal_
#components_
-stateMachine_
-currentState_
-currentOrthogonal
-initialized_
-initialized_
-HTTP_VERSION
-owner_
-postInitializationFailure
EventPtr_
function< void(const
std::string &)>
map< smacc2::ComponentKey
std::shared_ptr< smacc2
::ISmaccComponent > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
boost::signals2::signal
< Signature, optional
_last_value= typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity,
Signature >::function_type, boost::
signals2::mutex >
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponents()
+ operator=()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure
Event()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
boost::signals2::signal
< Signature, optional
_last_value= typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< void
(const TResponse &)>, typename
extended_signature< function_traits
< void(const TResponse &)>::arity,
void(const TResponse &)>::function
_type, boost::signals2::mutex >
smacc2::SmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(const TResponse
&), optional_last_value
< typename boost::function
_traits< void(const TResponse
&)>::result_type >, int, std
::less< int >, function< void
(const TResponse &)>, typename
extended_signature< function_traits
< void(const TResponse &)>::arity,
void(const TResponse &)>::function
_type, boost::signals2::mutex >
io_context
executor_work_guard
< decltype(io_context
_)::executor_type >
thread
unique_ptr< cl_http
::CpHttpSessionManager
::ServerConfig >
context
smacc2::ISmaccClientBehavior
+ ~ISmaccClientBehavior()
+ onEntry()
+ onExit()
< void(const TResponse &)>
-io_context_
-worker_guard_
-io_thread_
-server_config_
-ssl_context_
smacc2::SmaccSignal
< void(const TResponse &)>
cl_http::CpHttpConnection
Manager
+ CpHttpConnectionManager()
+ ~CpHttpConnectionManager()
+ onInitialize()
+ getStrand()
+ getIoContext()
cl_http::CpHttpSessionManager
+ CpHttpSessionManager()
+ ~CpHttpSessionManager()
+ onInitialize()
+ setServerUrl()
+ createSession()
+ isSSL()
+ getServerName()
+ getPort()
function< void(TResponse)>
-onResponseReceived_
-connectionManager_
-sessionManager_
-responseHandler_
cl_http::CpHttpRequestExecutor
+ CpHttpRequestExecutor()
+ ~CpHttpRequestExecutor()
+ onInitialize()
+ setDependencies()
+ executeRequest()
HttpMethod
+RequestType
-requestExecutor_
cl_http::CpHttpRequestBase
+ CpHttpRequestBase()
+ onStateOrthogonalAllocation()
+ runtimeConfigure()
+ onResponseReceived()
+ onEntry()
+ onExit()