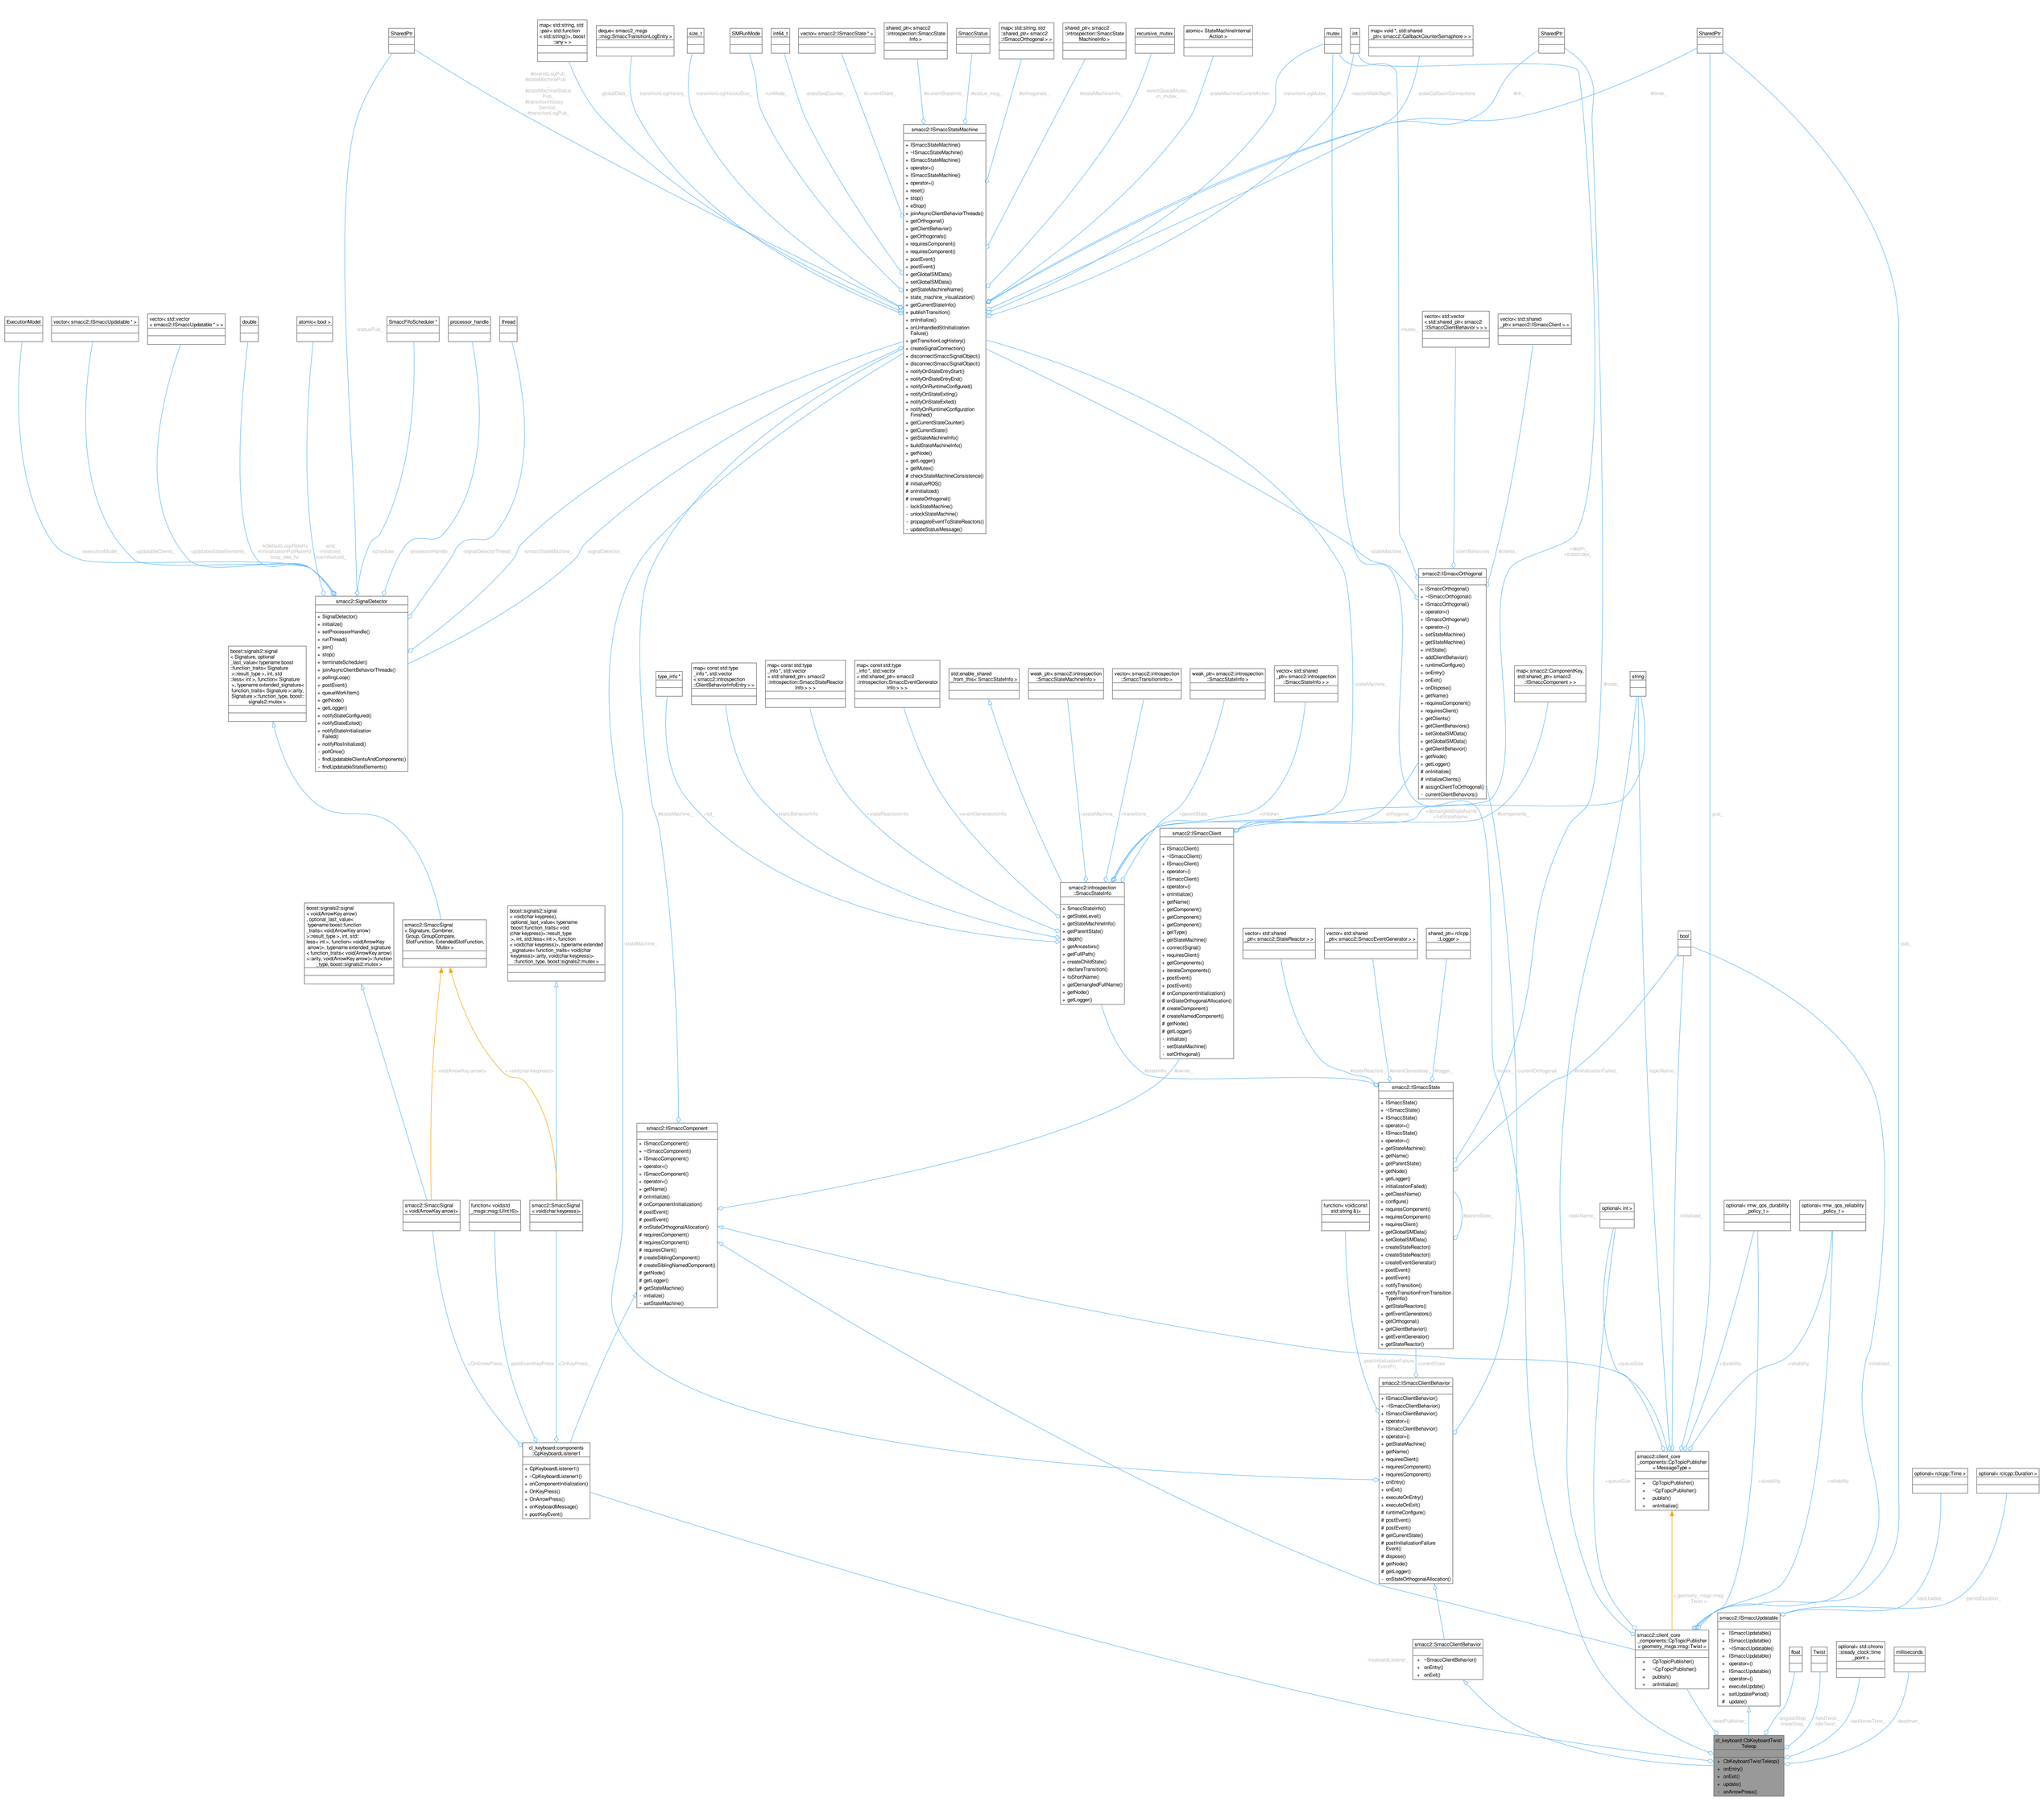
SharedPtr
map< std::string, std ::pair< std::function < std::string()>, boost ::any > >
deque< smacc2_msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::SmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
shared_ptr< smacc2 ::introspection::SmaccState MachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
mutex
int
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
SharedPtr
SharedPtr
#eventsLogPub_ #stateMachinePub
#stateMachineStatus Pub_ #transitionHistory Service_ #transitionLogPub_
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-stateSeqCounter_
#currentState_
#currentStateInfo_
#status_msg_
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_ #m_mutex_
-stateMachineCurrentAction
-transitionLogMutex_
-reactorWalkDepth_
-stateCallbackConnections
#nh_
#timer_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ onUnhandledStInitialization Failure()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector < smacc2::ISmaccUpdatable * > >
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
-stateMachine_
-mutex_
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
vector< std::shared _ptr< smacc2::ISmaccClient > >
-executionModel_
-updatableClients_
-updatableStateElements_
+DefaultLoopRateHz
+InitializationPollRateHz
-loop_rate_hz_
-end_
-initialized_
-rosInitialized_
-scheduler_
-processorHandle_
-signalDetectorThread_
-smaccStateMachine_
-signalDetector_
-stateMachine_
-clientBehaviors_
#clients_
+depth_
+stateIndex_
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization Failed()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
boost::signals2::signal < Signature, optional _last_value= typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost:: signals2::mutex >
type_info *
map< const std::type _info *, std::vector < smacc2::introspection ::ClientBehaviorInfoEntry > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::ISmaccEventGenerator Info > > >
std::enable_shared _from_this< SmaccStateInfo >
weak_ptr< smacc2::introspection ::SmaccStateMachineInfo >
vector< smacc2::introspection ::SmaccTransitionInfo >
weak_ptr< smacc2::introspection ::SmaccStateInfo >
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
string
#node_
#stateMachine_
#id_
-staticBehaviorInfo
-stateReactorsInfo
-eventGeneratorsInfo
+stateMachine_
-transitions_
+parentState_
+children_
-orthogonal_
+demangledStateName
+fullStateName
#components_
-pub_
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp ::Logger >
bool
-pub_
boost::signals2::signal < void(ArrowKey arrow) , optional_last_value= typename boost::function _traits< void(ArrowKey arrow) >::result_type >, int, std:: less< int >, function< void(ArrowKey arrow) >, typename extended_signature < function_traits< void(ArrowKey arrow) >::arity, void(ArrowKey arrow)>::function _type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal < void(char keypress), optional_last_value< typename boost::function_traits< void (char keypress)>::result_type >, int, std::less< int >, function < void(char keypress)>, typename extended _signature< function_traits< void(char keypress)>::arity, void(char keypress)> ::function_type, boost::signals2::mutex >
-stateMachine_
< void(ArrowKey arrow)>
< void(char keypress)>
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ initializationFailed()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#stateReactors_
#eventGenerators_
#logger_
#stateInfo_
#owner_
#parent_
-currentOrthogonal
-initializationFailed_
-topicName_
function< void(const std::string &)>
optional< int >
optional< rmw_qos_durability _policy_1 >
optional< rmw_qos_reliability _policy_1 >
-topicName_
-initialized_
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure Event()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
-postInitializationFailure _eventPt_
-currentState_
-currentState
smacc2::client_core _components::CpTopicPublisher < MessageType >
+ CpTopicPublisher()
+ ~CpTopicPublisher()
+ publish()
+ onInitialize()
+queueSize
+durability
+reliability
optional< rclcpp::Time >
optional< rclcpp::Duration >
-initialized_
cl_keyboard::components ::CpKeyboard::Listener1
+ CpKeyboardListener1()
+ ~CpKeyboardListener1()
+ onComponentInitialization()
+ OnKeyPress()
+ OnArrowPress()
+ onKeyboardMessage()
+ postKeyEvent()
+OnArrowPress_
postEventKeyPress_
+OnKeyPress_
smacc2::SmaccClientBehavior
+ ~SmaccClientBehavior()
+ onEntry()
+ onExit()
-keyboardListener_
smacc2::client_core _components::CpTopicPublisher < geometry_msgs::msg::Twist >
+ CpTopicPublisher()
+ ~CpTopicPublisher()
+ publish()
+ onInitialize()
< geometry_msgs::msg ::Twist >
-lastUpdate_
-periodDuration_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ ISmaccUpdatable()
+ operator=()
+ executeUpdate()
+ setUpdatePeriod()
# update()
float
Twist
optional< std::chrono ::steady_clock::time _point >
milliseconds
+twistPublisher_
angularStep_ linearStep_
-yieldTwist_ -idleTwist_
-lastArrowTime_
-deadman_
cl_keyboard::ClKeyboardTwist Teleop
+ ClKeyboardTwistTeleop()
+ onEntry()
+ onExit()
+ update()
- onArrowPress()