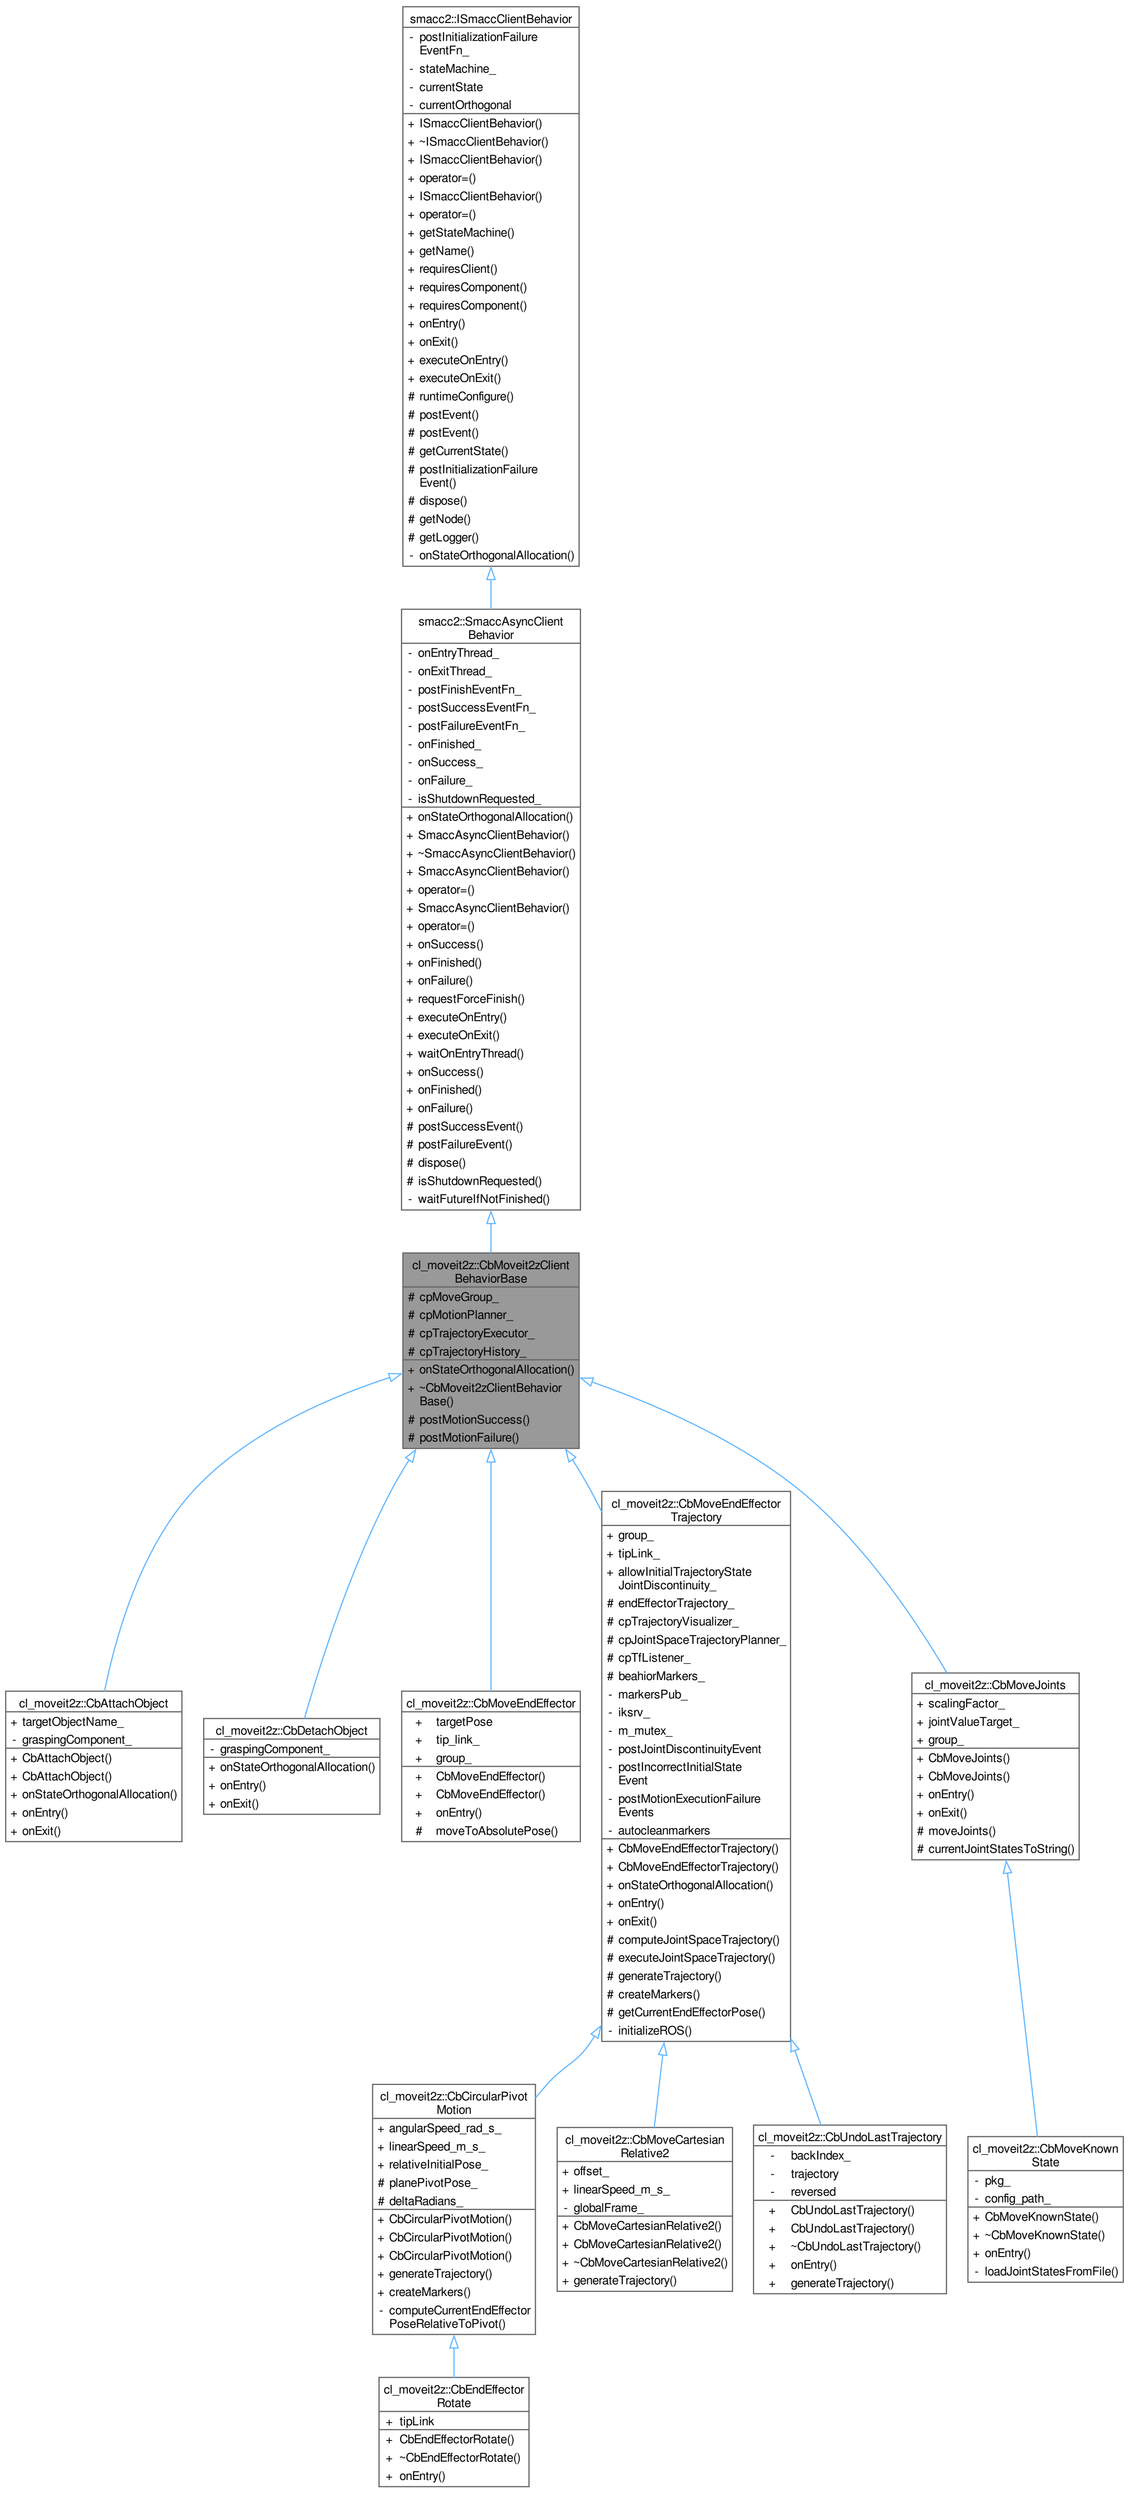
smacc2::ISmaccClientBehavior
- postInitializationFailure EventFn_
- stateMachine_
- currentState
- currentOrthogonal
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure Event()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
smacc2::SmaccAsyncClient Behavior
- onEntryThread_
- onExitThread_
- postFinishEventFn_
- postSuccessEventFn_
- postFailureEventFn_
- onFinished_
- onSuccess_
- onFailure_
- isShutdownRequested_
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
cl_moveit2z::CbMoveit2zClient BehaviorBase
cpMoveGroup_
cpMotionPlanner_
cpTrajectoryExecutor_
cpTrajectoryHistory_
+ onStateOrthogonalAllocation()
+ ~CbMoveit2zClientBehavior Base()
# postMotionSuccess()
# postMotionFailure()
cl_moveit2z::CbAttachObject
+ targetObjectName_
- graspingComponent_
+ CbAttachObject()
+ CbAttachObject()
+ onStateOrthogonalAllocation()
+ onEntry()
+ onExit()
cl_moveit2z::CbDetachObject
- graspingComponent_
+ onStateOrthogonalAllocation()
+ onEntry()
+ onExit()
cl_moveit2z::CbMoveEndEffector
+ targetPose
+ tip_link_
+ group_
+ CbMoveEndEffector()
+ CbMoveEndEffector()
+ onEntry()
# moveToAbsolutePose()
cl_moveit2z::CbMoveEndEffector Trajectory
+ group_
+ tipLink_
+ allowInitialTrajectoryState JointDiscontinuity_
# endEffectorTrajectory_
# cpTrajectoryVisualizer_
# cpJointSpaceTrajectoryPlanner_
# cpTfListener_
# beahiorMarkers_
- markersPub_
- iksrv_
- m_mutex_
- postJointDiscontinuityEvent
- postIncorrectInitialState Event
- postMotionExecutionFailure Events
- autocleanmarkers
+ CbMoveEndEffectorTrajectory()
+ CbMoveEndEffectorTrajectory()
+ onStateOrthogonalAllocation()
+ onEntry()
+ onExit()
# computeJointSpaceTrajectory()
# executeJointSpaceTrajectory()
# generateTrajectory()
# createMarkers()
# getCurrentEndEffectorPose()
- initializeROS()
cl_moveit2z::CbMoveJoints
+ scalingFactor_
+ jointValueTarget_
+ group_
+ CbMoveJoints()
+ CbMoveJoints()
+ onEntry()
+ onExit()
# moveJoints()
# currentJointStatesToString()
cl_moveit2z::CbCircularPivot Motion
+ angularSpeed_rad_s_
+ linearSpeed_m_s_
+ relativeInitialPose_
# planePivotPose_
# deltaRadians_
+ CbCircularPivotMotion()
+ CbCircularPivotMotion()
+ CbCircularPivotMotion()
+ generateTrajectory()
+ createMarkers()
- computeCurrentEndEffector PoseRelativeToPivot()
cl_moveit2z::CbMoveCartesian Relative2
+ offset_
+ linearSpeed_m_s_
- globalFrame_
+ CbMoveCartesianRelative2()
+ CbMoveCartesianRelative2()
+ ~CbMoveCartesianRelative2()
+ generateTrajectory()
cl_moveit2z::CbUndoLastTrajectory
- backIndex_
- trajectory
- reversed
+ CbUndoLastTrajectory()
+ CbUndoLastTrajectory()
+ ~CbUndoLastTrajectory()
+ onEntry()
+ generateTrajectory()
cl_moveit2z::CbMoveKnown State
- pkg_
- config_path_
+ CbMoveKnownState()
+ ~CbMoveKnownState()
+ onEntry()
- loadJointStatesFromFile()
cl_moveit2z::CbEndEffector Rotate
+ tipLink
+ CbEndEffectorRotate()
+ ~CbEndEffectorRotate()
+ onEntry()