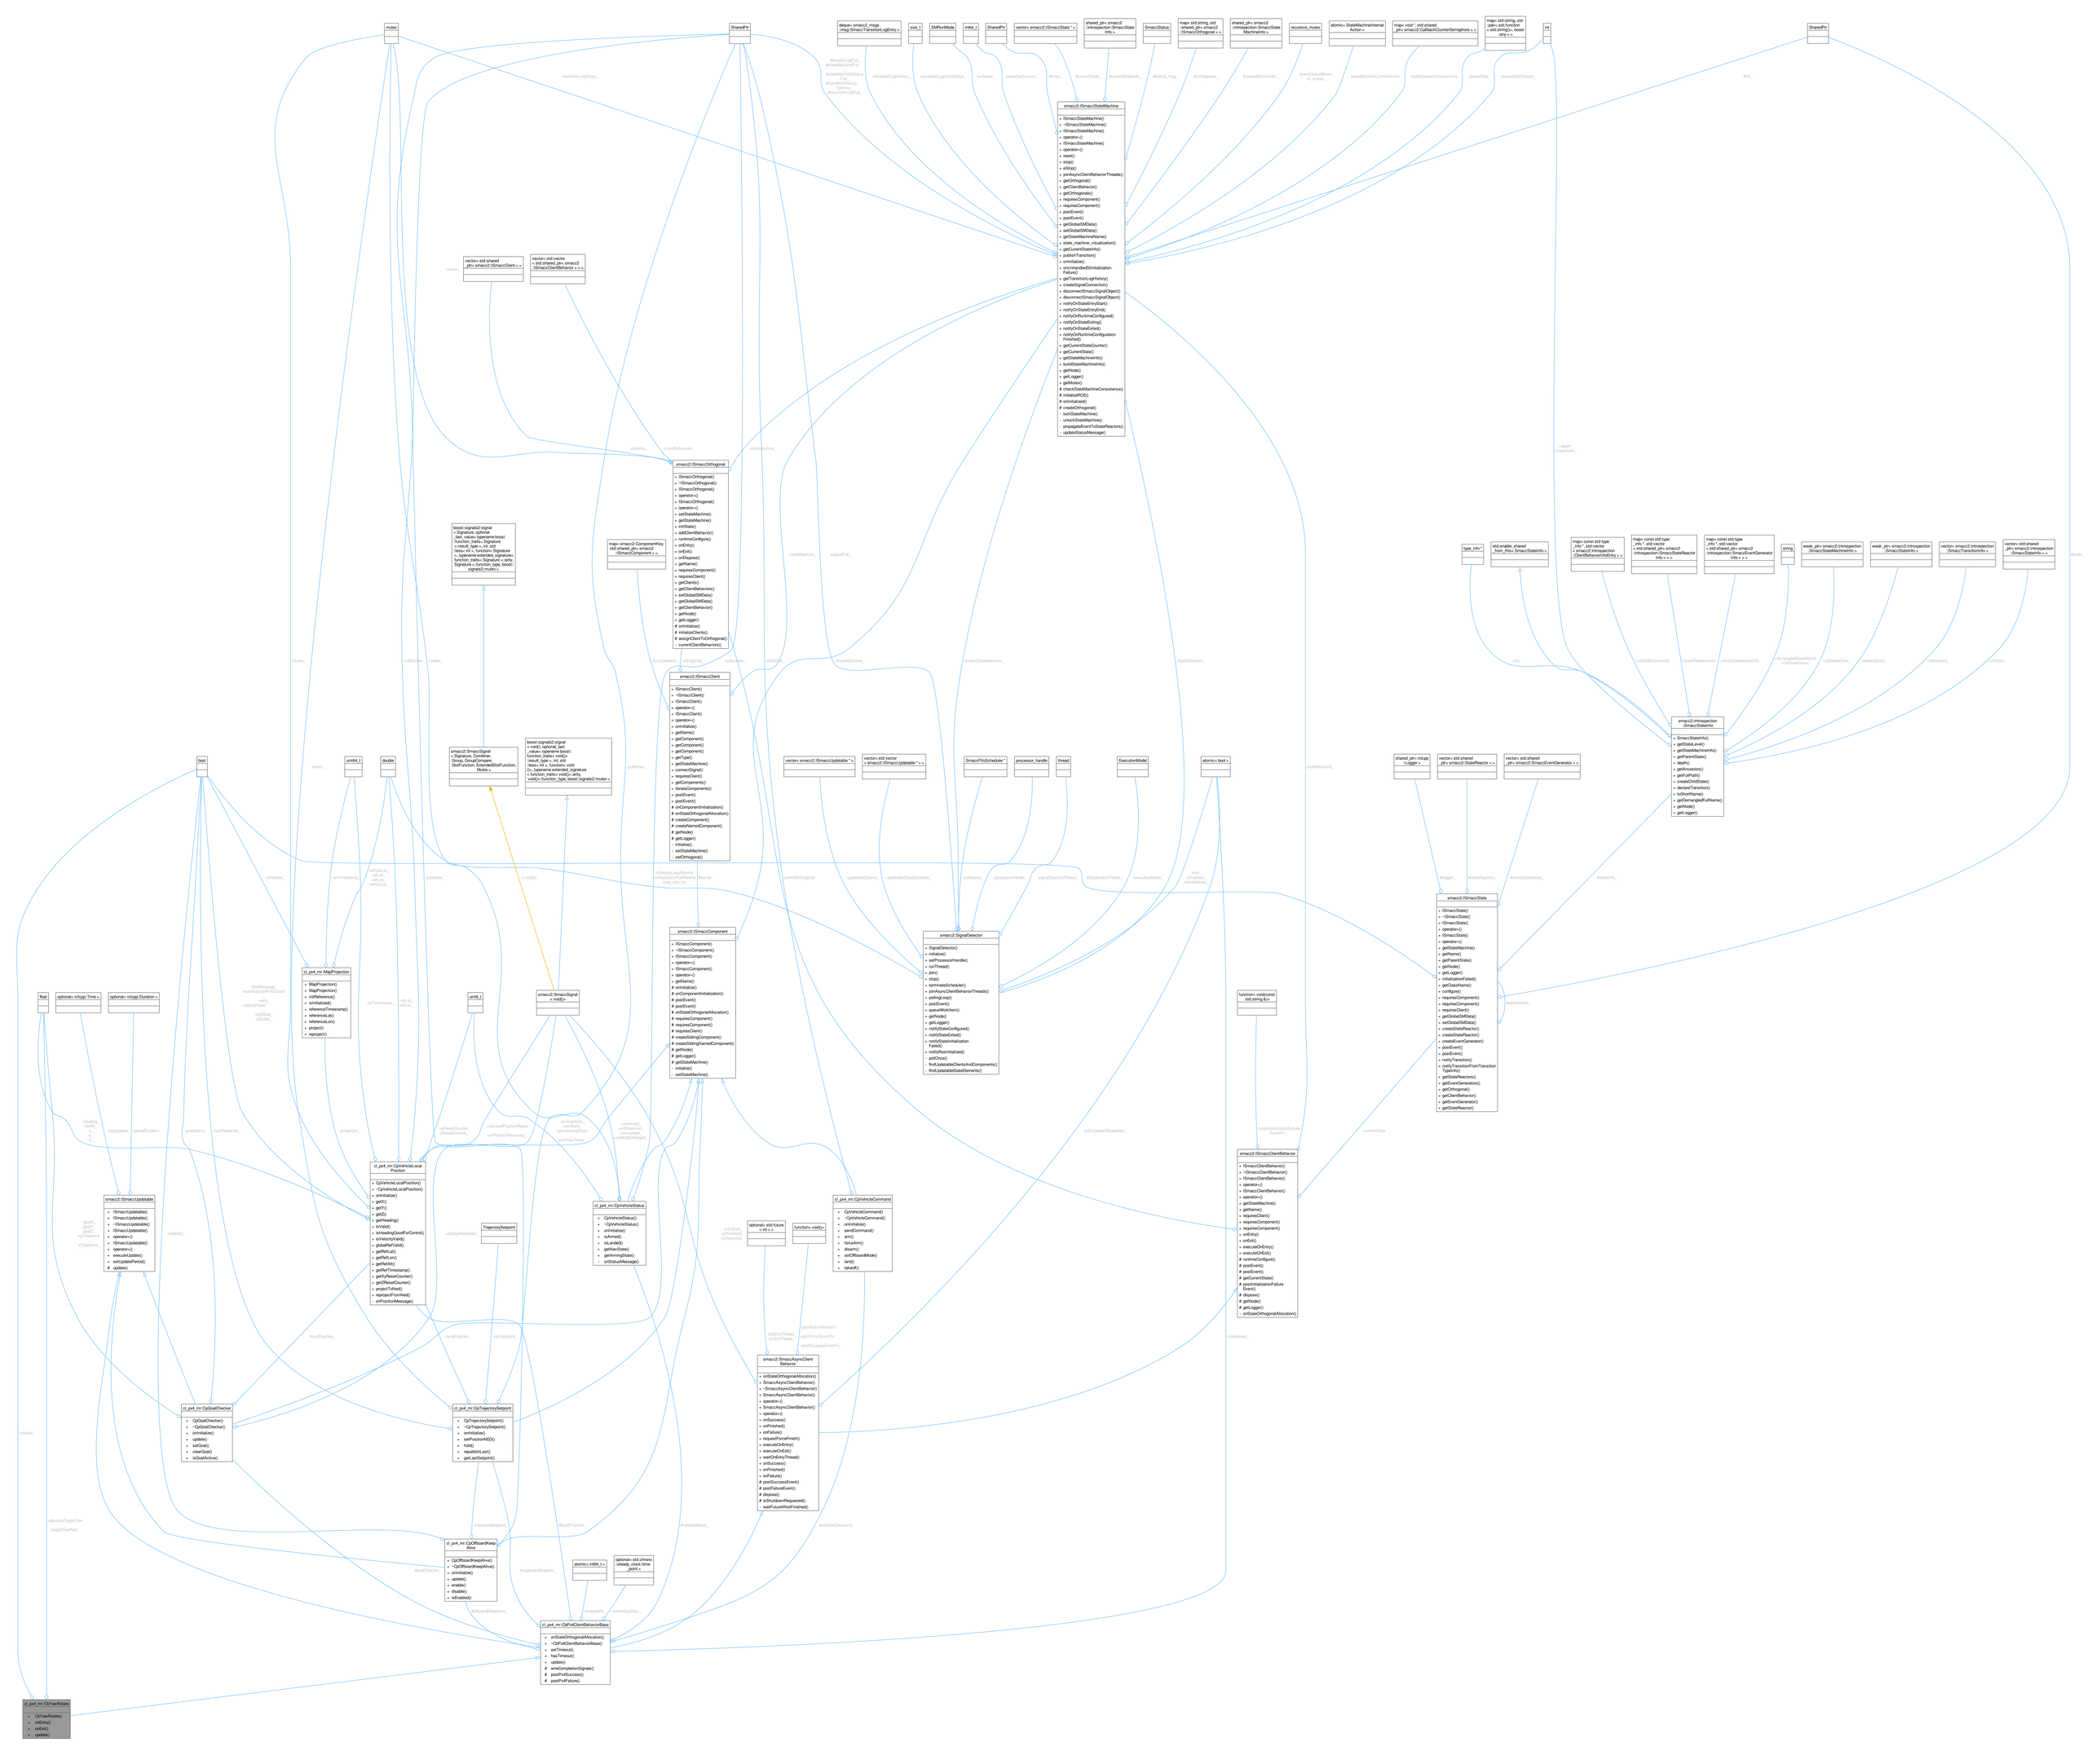
mutex
SharedPtr
deque< smacc2::msgs
::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2
::introspection::SmaccState
Info >
Smacc::Status
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
shared_ptr< smacc2
::introspection::SmaccState
MachineInfo >
recursive_mutex
atomic< StateMachineInternal
Action >
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std
::pair< std::function
< std::string()>, bool[
,]any > >
int
SharedPtr
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operation=()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ onUnhandledStInitialization
Failure()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrent States()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
+ onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
boost::signals2::signal
< Signature, optional
_last_value< typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity,
Signature >::function_type, boost::
signals2::mutex >
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponents()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::SmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(), optional_last
_value< typename boost::
function_traits< void()>
::result_type >, int, std
::less< int >, function< void
(const boost::signals2::connection
&, function_traits< void()>::arity,
void()>::function_type, boost::signals2::mutex >
vector< smacc2::ISmaccUpdatable * >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
atomic< bool >
vector< smacc2::ISmaccClient * >
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
+ onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization
Failed()
+ notifyRosInitialized()
- postOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
shared_ptr< rclcpp
::Logger >
vector< std::shared
_ptr< smacc2::StateReactor > >
vector< std::shared
_ptr< smacc2::SmaccEventGenerator > >
type_info *
std::enable_shared
_from_this< SmaccStateInfo >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::ISmaccClientBehavior
InfoEntry > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::ISmaccStateReactor
Info > > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::ISmaccEventGenerator
Info > > >
string
weak_ptr< smacc2::introspection
::ISmaccStateMachineInfo >
weak_ptr< smacc2::introspection
::ISmaccStateInfo >
vector< smacc2::introspection
::ISmaccTransitionInfo >
vector< std::shared
_ptr< smacc2::introspection
::ISmaccStateInfo > >
smacc2::introspection
::ISmaccStateInfo
+ ISmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ initializationFailed()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition
TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
function< void(const
std::string &)>
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure
Event()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
vector< std::shared
_ptr< smacc2::ISmaccUpdatable > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ ISmaccUpdatable()
+ operator=()
+ execute(Update)()
+ setUpdatePeriod()
# update()
cl_p4_mr::MapProjection
+ MapProjection()
+ MapProjection()
+ initReference()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
cl_p4_mr::CpVehicleLocal
Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefIsValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
cl_p4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
cl_p4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
optional< std::future
< int > >
function< void()>
TrajectorySetpoint
cl_p4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_p4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
smacc2::SmaccAsyncClient
Behavior
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
cl_p4_mr::CpOffboardKeep
Alive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
atomic< int64_t >
optional< std::chrono
::steady_clock::time
_point >
cl_p4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
cl_p4_mr::CbYawRotate
+ CbYawRotate()
+ onEntry()
+ onExit()
+ update()
float
optional< rclcpp::Time >
optional< rclcpp::Duration >
uint8_t
double
uint64_t
bool