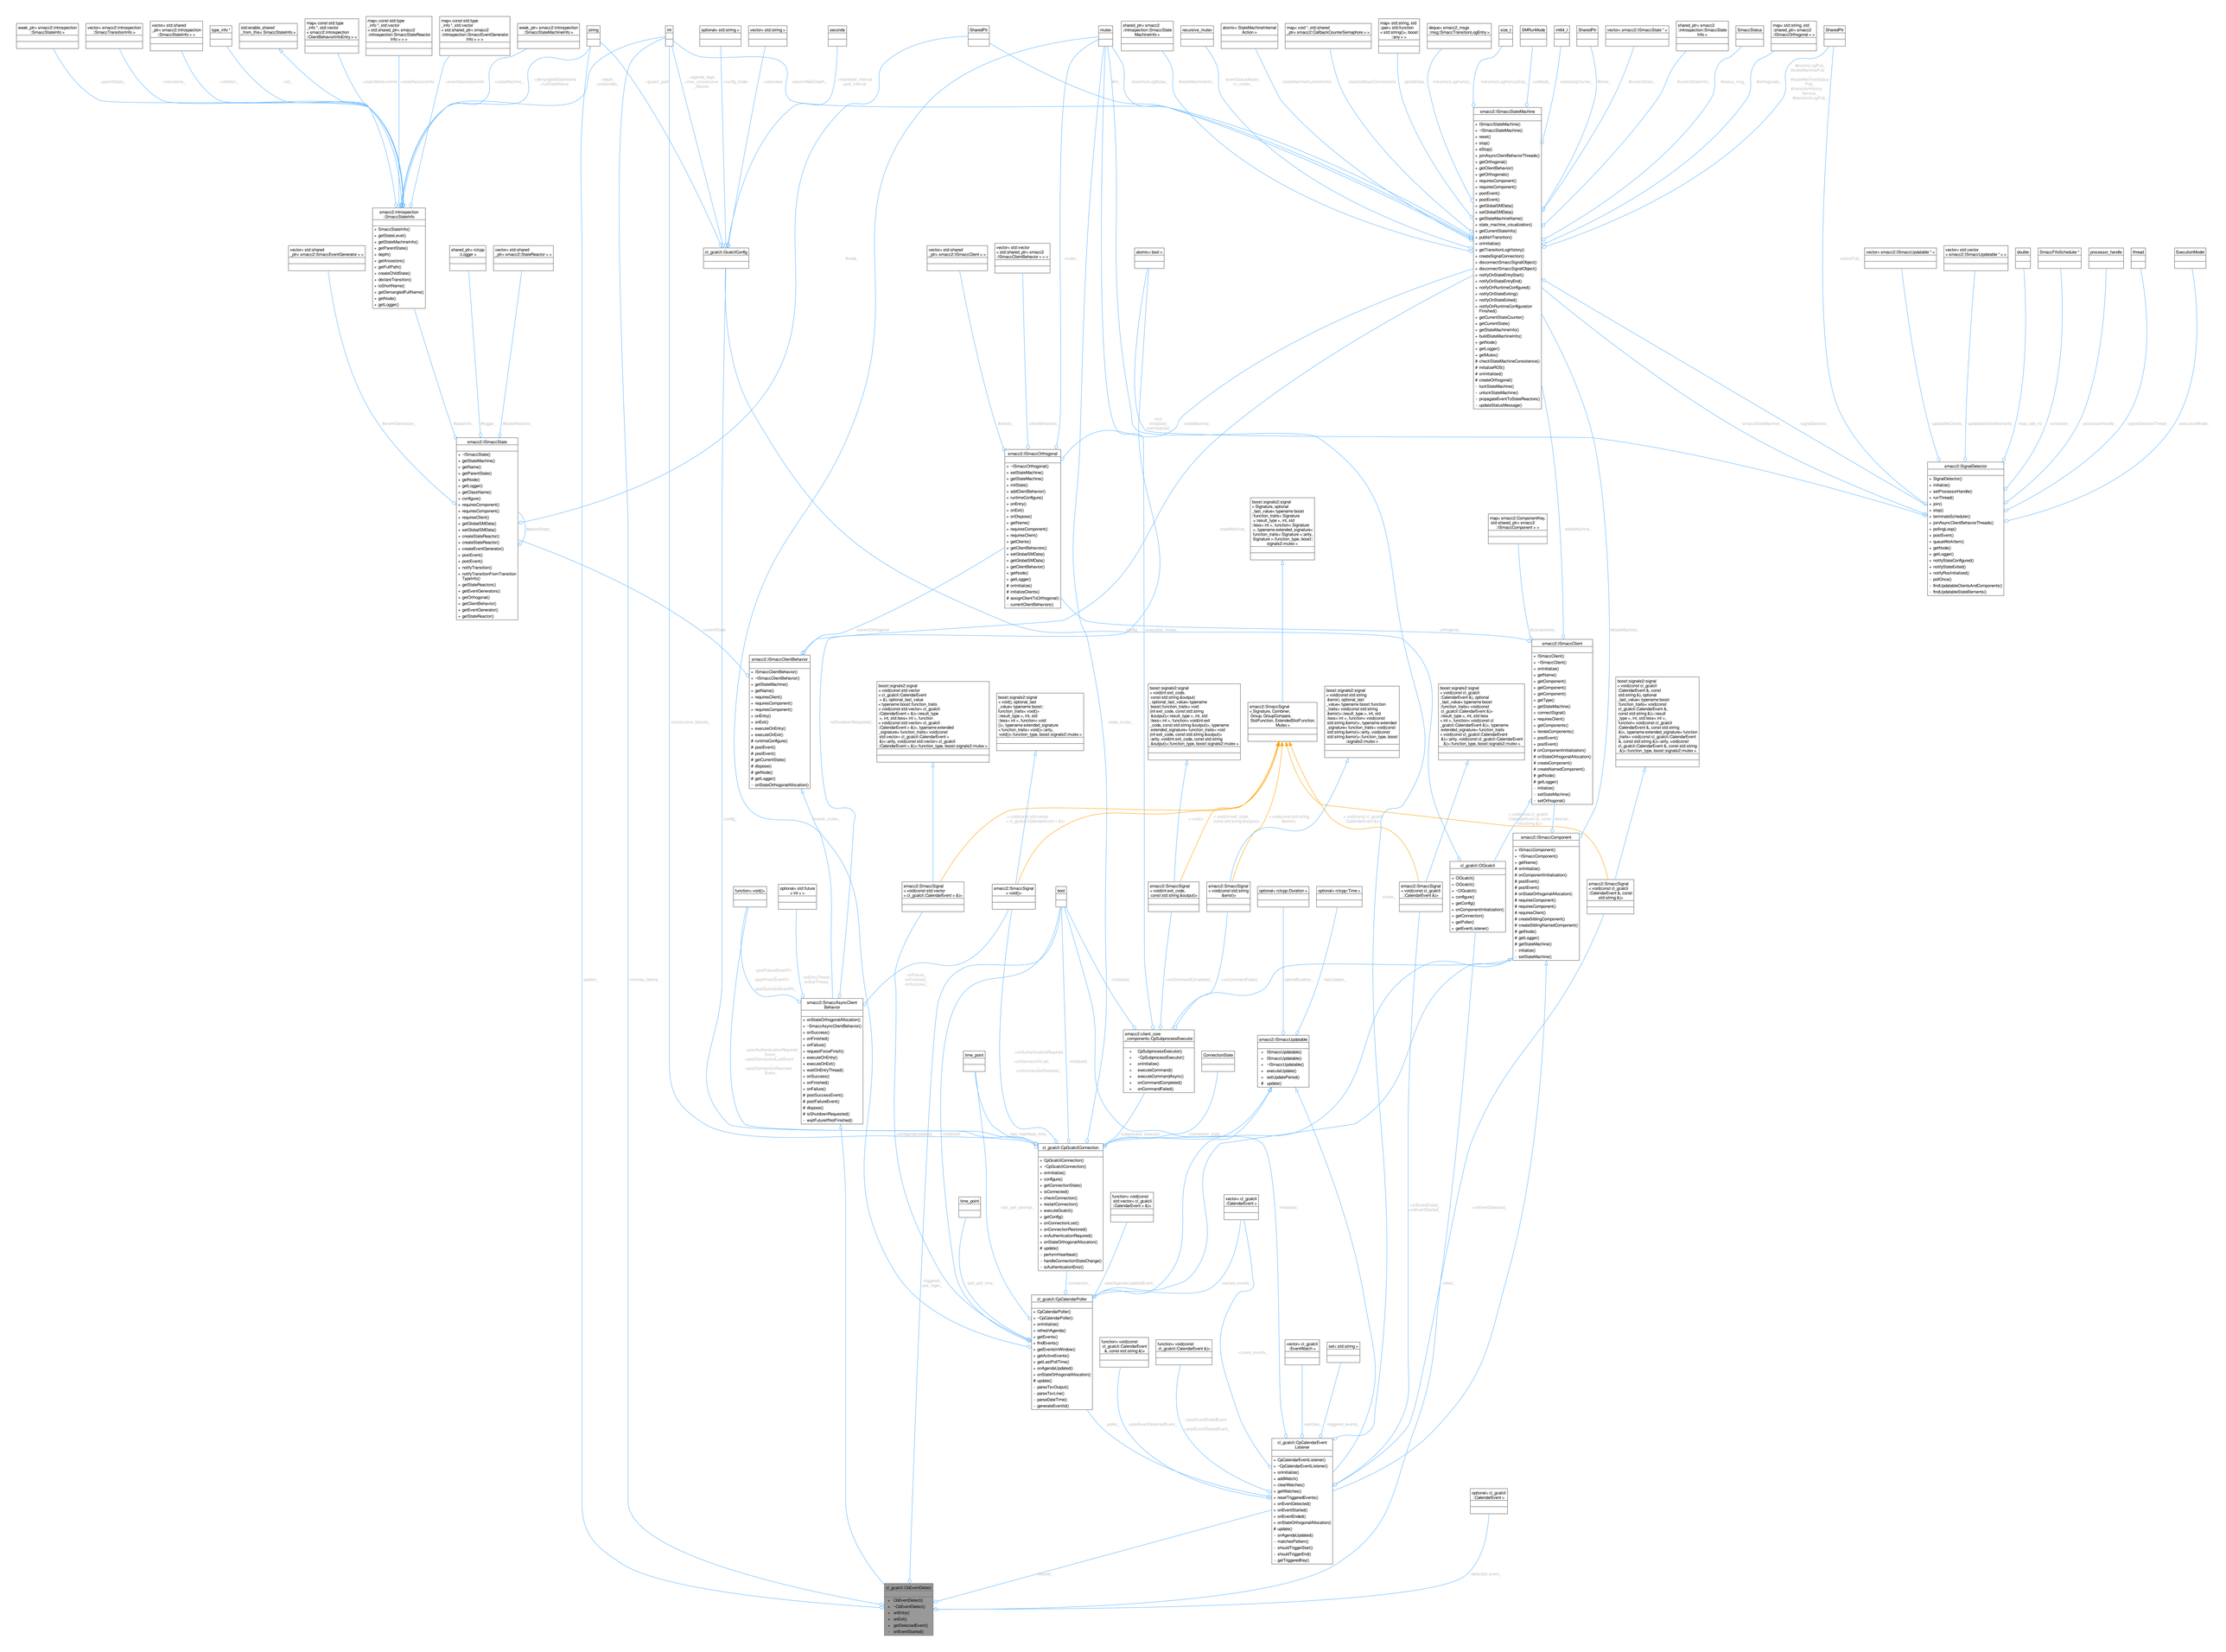
weak_ptr< smacc2::introspection ::ISmaccStateInfo >
vector< smacc2::introspection ::ISmaccTransitionInfo >
vector< std::shared_ptr< smacc2::introspection ::ISmaccStateInfo > >
type_info *
std::enable_shared_ from_this< ISmaccStateInfo >
map< const std::type _info *, std::vector < smacc2::introspection ::ClientBehaviorInfoEntry > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::ISmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::ISmaccEventGenerator Info > > >
weak_ptr< smacc2::introspection ::ISmaccStateMachineInfo >
string
int
optional< std::string >
vector< std::string >
seconds
SharedPtr
mutex
shared_ptr< smacc2 ::introspection::ISmaccStateMachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string() >, bool> ,any > >
deque< smacc2_msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::ISmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
SharedPtr
smacc2::introspection ::ISmaccStateInfo
+ ISmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
vector< std::shared _ptr< smacc2::ISmaccEventGenerator > >
shared_ptr< rclcpp ::Logger >
vector< std::shared _ptr< smacc2::IStateReactor > >
cl_gcalcli::GcalcliConfig
vector< std::shared _ptr< smacc2::ISmaccClient > >
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
atomic< bool >
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requireComponent()
+ requiresComponents()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
lockStateMachine()
unlockStateMachine()
propagateEventToStateReactions()
updateStatusMessage()
vector< std::shared _ptr< smacc2::ISmaccUpdatable * >
vector< std::vector < smacc2::ISmaccUpdatable * > >
double
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyPluginInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccOrthogonal
+ ~ISmaccOrthogonal()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
smacc2::ISmaccState
+ ~ISmaccState()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
boost::signals2::signal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ reinitComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccClientBehavior
+ ~ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
+ runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
boost::signals2::signal < void(const std::vector < cl_gcalcli::CalendarEvent > &)> boost::signals2::signal < void(const std::vector < cl_gcalcli::CalendarEvent > &)>
boost::signals2::signal < void() >
boost::signals2::signal < void(int exit_code, const std::string &output)> boost::signals2::signal < void(int exit_code, const std::string &output)>
boost::signals2::signal < void(const std::string &error)> boost::signals2::signal < void(const std::string &error)>
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional_last _value< typename boost::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less< int >, function< void(const std::string &error)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &)>::function_type, boost::signals2::mutex > boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional_last _value< typename boost::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less< int >, function< void(const std::string &error)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional_last _value< typename boost::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less< int >, function< void(const std::string &error)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional_last _value< typename boost::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less< int >, function< void(const std::string &error)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional_last _value< typename boost::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less< int >, function< void(const std::string &error)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional_last _value< typename boost::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less< int >, function< void(const std::string &error)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional_last _value< typename boost::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less< int >, function< void(const std::string &error)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional_last _value< typename boost::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less< int >, function< void(const std::string &error)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &)>::function_type, boost::signals2::mutex >
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
cl_gcalcli::ClOcalcli
+ ClOcalcli()
+ ClOcalcli()
+ ~ClOcalcli()
+ configure()
+ getConfig()
+ onComponentInitialization()
+ getConnection()
+ getPoller()
+ getEventListener()
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &) , optional _last_value< typename boost ::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result_type > , int, std::less < int >, function< void(const cl_gcalcli ::CalendarEvent &)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli ::CalendarEvent &, const std::string &)>, function_type, boost::signals2::mutex >
function< void()>
optional< std::future < int > >
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestFinishFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
time_point
cl_gcalcli::ClCalendarConnection
+ ClQcalcliConnection()
+ ~ClQcalcliConnection()
+ onInitialize()
+ configure()
+ getConnectionState()
+ isConnected()
+ checkConnection()
+ restartConnection()
+ executeQcalcli()
+ getConfig()
+ onConnectionLost()
+ onConnectionRestored()
+ onAuthenticationRequired()
+ onStateOrthogonalAllocation()
# update()
- performHeartbeat()
- handleConnectionStateChange()
- isAuthenticationError()
smacc2::client_core _components::ClSubprocessExecutor
+ ClSubprocessExecutor()
+ ~ClSubprocessExecutor()
+ onInitialize()
+ executeCommand()
+ executeCommandAsync()
+ onCommandCompleted()
+ onCommandFailed()
ConnectionState
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
function< void(const std::vector< cl_gcalcli ::CalendarEvent > &)>
vector< cl_gcalcli ::CalendarEvent >
cl_gcalcli::ClCalendarPoller
+ ClCalendarPoller()
+ ~ClCalendarPoller()
+ onInitialize()
+ refreshAgenda()
+ getEvents()
+ findEvents()
+ getEventsInWindow()
+ getActiveEvents()
+ getLastPollTime()
+ onAgenda(Updated)
+ onStateOrthogonalAllocation()
# update()
- parseTevOutput()
- parseTimLine()
- parseDateTime()
- generateEventId()
function< void(const cl_gcalcli::CalendarEvent &, const std::string &)>
function< void(const cl_gcalcli::CalendarEvent &)>
vector< cl_gcalcli ::EventWatch >
set< std::string >
cl_gcalcli::ClCalendarEvent Listener
+ ClCalendarEventListener()
+ ~ClCalendarEventListener()
+ onInitialize()
+ addWatch()
+ clearWatches()
+ getWatches()
+ resetTriggeredEvents()
+ onEventDetected()
+ onEventStarted()
+ onEventEnded()
+ onStateOrthogonalAllocation()
# update()
- onAgenda(Updated)
- matchesPattern()
- shouldTriggerStart()
- shouldTriggerEnd()
- getTriggeredKey()
optional< cl_gcalcli ::CalendarEvent >
cl_gcalcli::ClEventDetect
+ ClEventDetect()
+ ~ClEventDetect()
+ onEntry()
+ onExit()
- getDetectedEvent()
- onEventStarted()