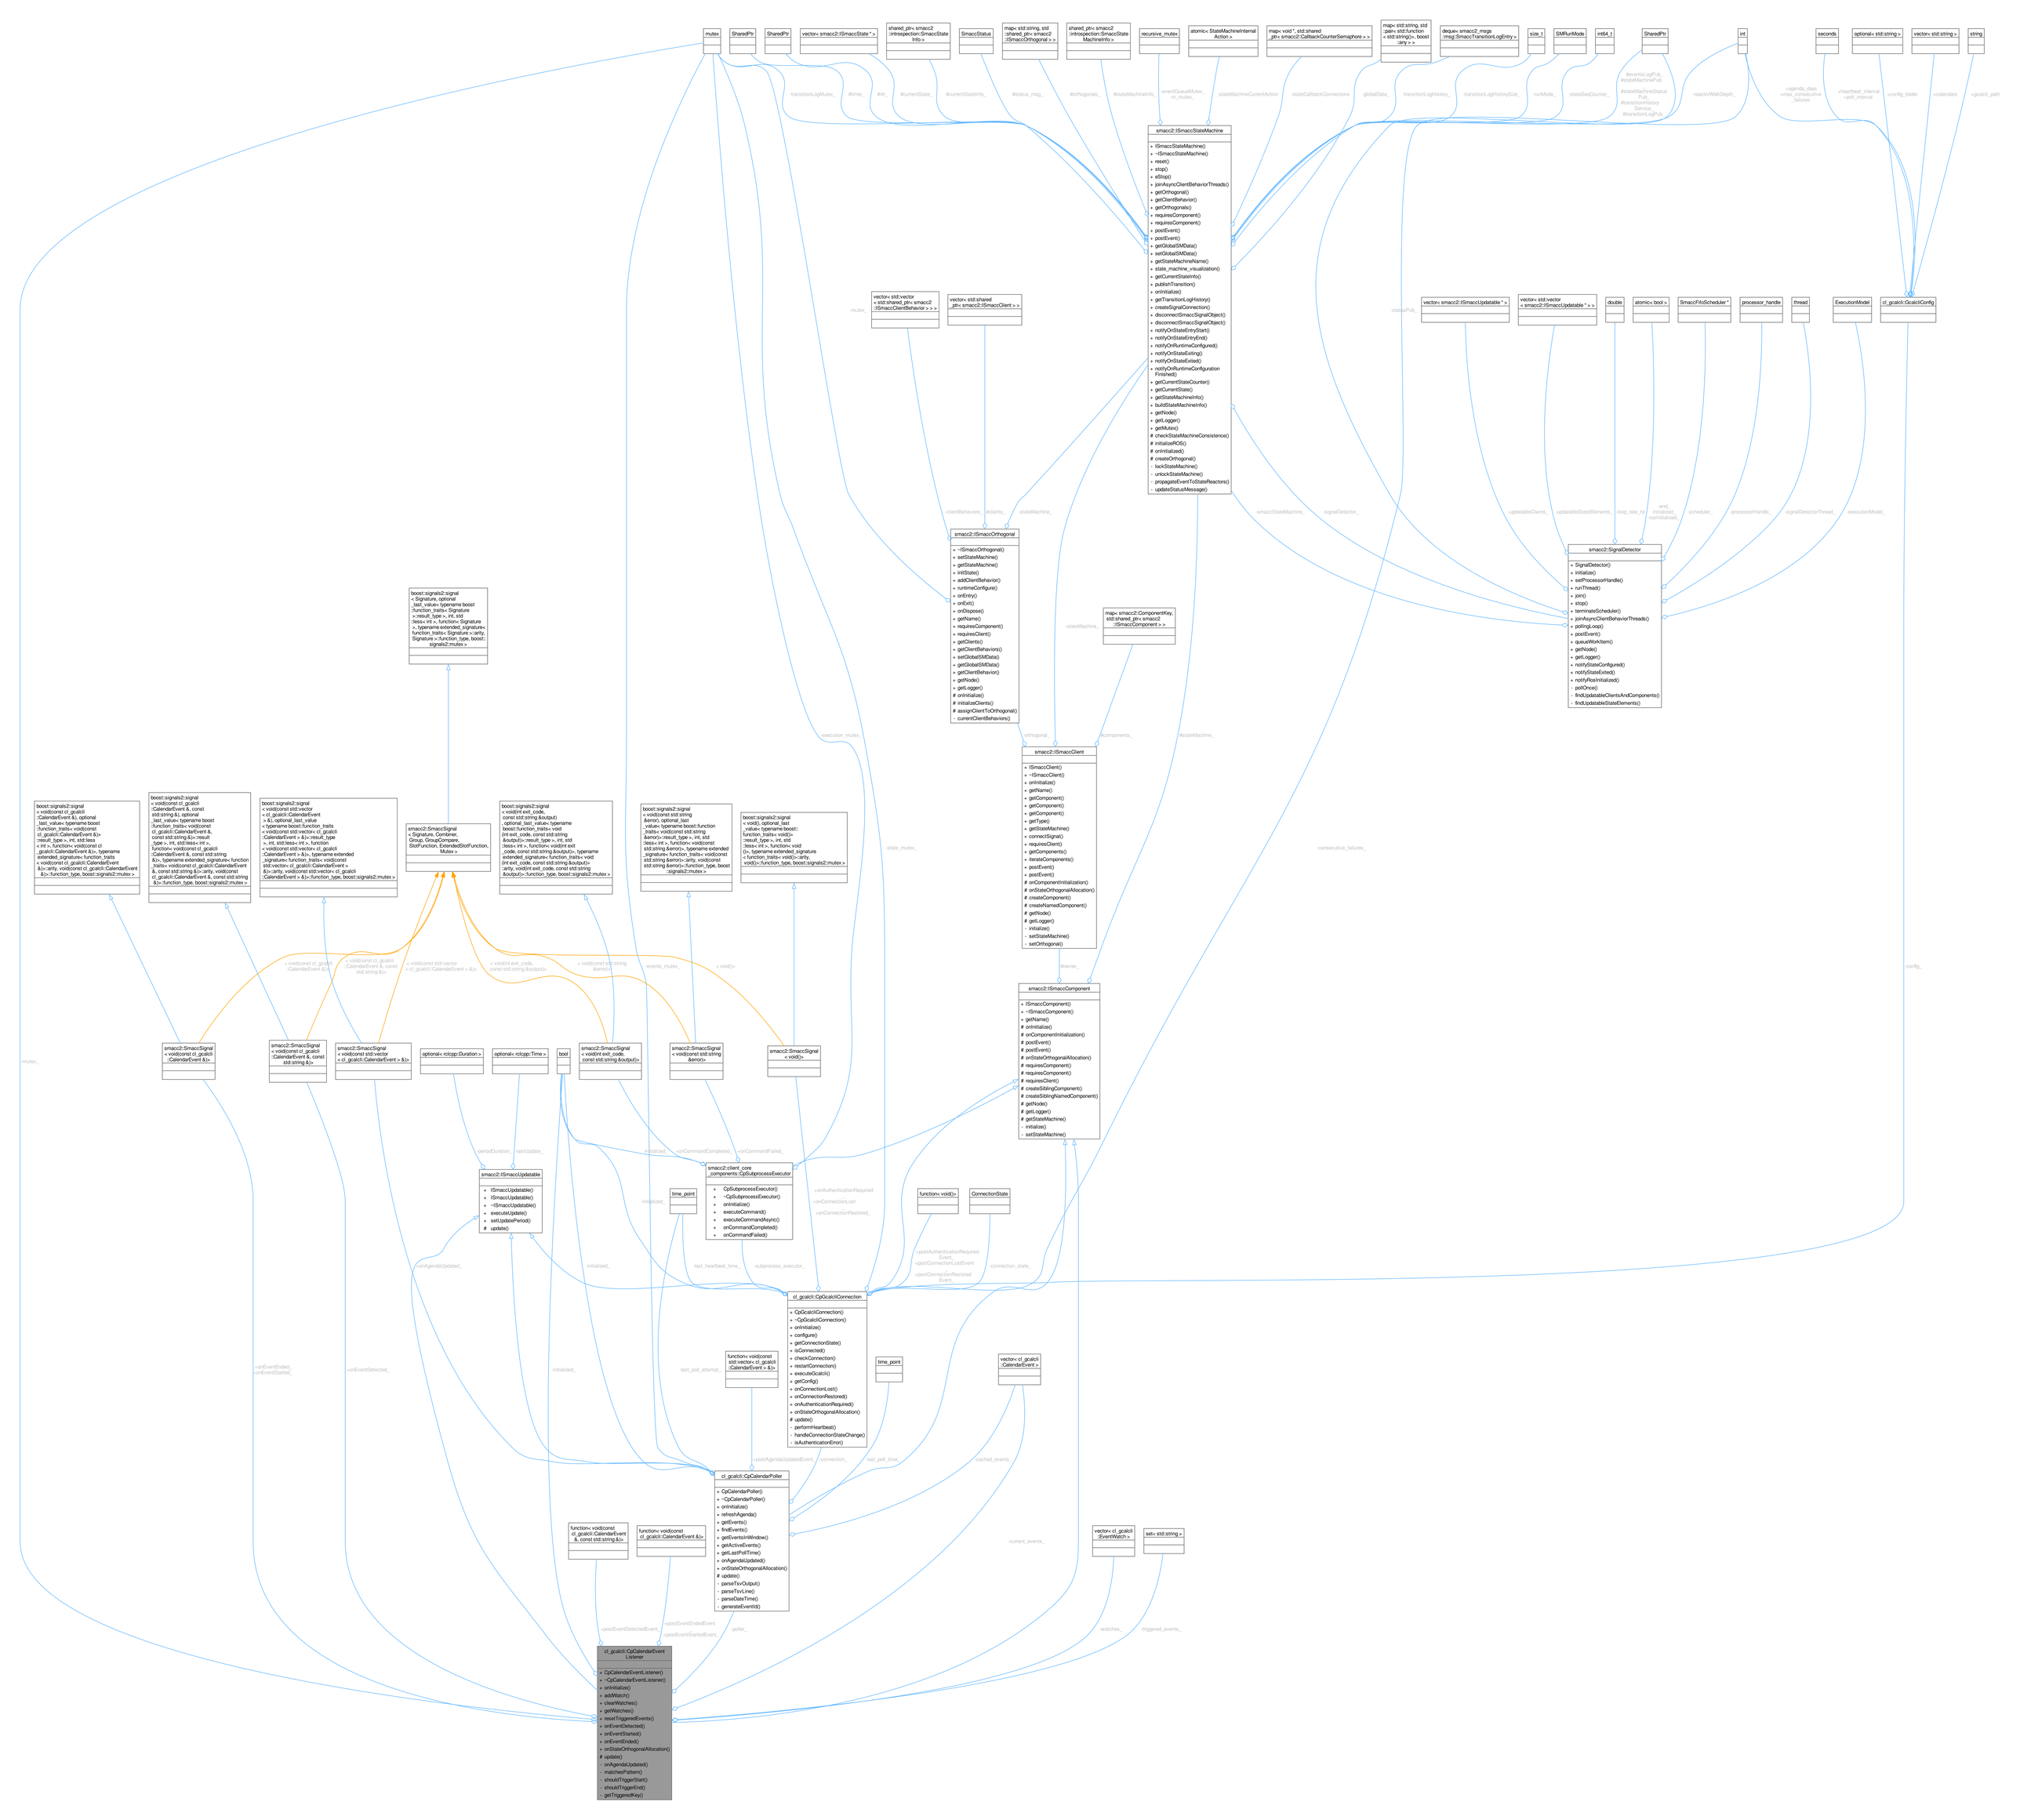
mutex
SharedPtr
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::SmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
shared_ptr< smacc2 ::introspection::SmaccState MachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string()>, boost ::any > >
deque< smacc2_msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRuntMode
int64_t
SharedPtr
int
seconds
optional< std::string >
vector< std::string >
string
-transitionLogMutex_
#timer_
#rh_
#currentState_
#currentStateInfo_
#status_msg_
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_ -m_mutex_
-stateMachineCurrentAction_
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-stateSeqCounter_
#eventsLogPub_ #stateMachinePub
#stateMachineStatus Pub_ #transitionHistory Service_ #transitionsLogPub_
-reactorWalkDepth_
+agenda_days +max_consecutive _failures
+heartbeat_interval +poll_interval_
+config_folder
+calendars
+gcalcli_path
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
-mutex_
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
vector< std::shared _ptr< smacc2::ISmaccClient > >
-clientBehaviors_
#clients_
-stateMachine_
-statePub_
vector< smacc2::ISmaccUpdatable * >
vector< std::vector < smacc2::ISmaccUpdatable * > >
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
cl_gcalcli::GcalcliConfig
-updatableClients_
-updatableStateElements_
-loop_rate_hz_
-end- -initialized_ -rosInitialized_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionMode_
smacc2::ISmaccOrthogonal
+ ~ISmaccOrthogonal()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
-stateMachine_
-orthogonal_
#components_
#stateMachine_
-smaccStateMachine_
-signalDetector_
boost::signals2::signal < Signature, optional _last_value= typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost:: signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &, const std::string &), optional _last_value= typename boost ::function_traits< void(const cl_gcalcli::CalendarEvent &, const std::string &)>::result _type >, int, std::less< int >, function< void(const cl_gcalcli ::CalendarEvent &, const std::string &)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &, const std::string &)>::arity, void(const cl_gcalcli::CalendarEvent &, const std::string &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &), optional _last_value= typename boost ::function_traits< void(const cl_gcalcli::CalendarEvent &)>::result _type >, int, std::less< int >, function< void(const cl_gcalcli ::CalendarEvent &)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &)>::arity, void(const cl_gcalcli::CalendarEvent &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &, const std::string &), optional _last_value= typename boost ::function_traits< void(const cl_gcalcli::CalendarEvent &, const std::string &)>::result _type >, int, std::less< int >, function< void(const cl_gcalcli ::CalendarEvent &, const std::string &)>, typename extended_signature< function_traits< void(const cl_gcalcli::CalendarEvent &, const std::string &)>::arity, void(const cl_gcalcli::CalendarEvent &, const std::string &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const std::vector < cl_gcalcli::CalendarEvent > &), optional _last_value= typename boost ::function_traits< void(const std::vector < cl_gcalcli::CalendarEvent > &)>::result _type >, int, std::less< int >, function< void(const std::vector < cl_gcalcli::CalendarEvent > &)>, typename extended_signature< function_traits< void(const std::vector < cl_gcalcli::CalendarEvent > &)>::arity, void(const std::vector < cl_gcalcli ::CalendarEvent > &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(int exit_code, const std::string &output) , optional_last_value= typename boost::function_traits< void (int exit_code, const std::string &output)>::result_type >, int, std ::less< int >, function< void(int exit _code, const std::string &output)>, typename extended_signature< function_traits< void (int exit_code, const std::string &output)> ::arity, void(int exit_code, const std::string &output)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(int exit_code, const std::string &output) , optional_last_value= typename boost::function_traits< void (int exit_code, const std::string &output)>::result_type >, int, std ::less< int >, function< void(int ext _code, const std::string &output)>, typename extended_signature< function_traits< void (int ext_code, const std::string &output)> ::arity, void(int ext_code, const std::string &output)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const std::string &error) , optional_last _value= typename boost::function _traits< void(const std::string &error)>::result_type >, int, std ::less< int >, function< void(const std::string &error)>, typename extended _signature< function_traits< void(const std::string &error)>::arity, void(const std::string &error)>::function_type, boost ::signals2::mutex >
boost::signals2::signal < void(), optional_last _value= typename boost:: function_traits< void()> ::result_type >, int, std ::less< int >, function< void ()>, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
-state_mutex_
-execution_mutex_
-consecutive_failures_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
#owner_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
+ setStateMachine()
-config_
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &)>
boost::signals2::signal < void(const cl_gcalcli ::CalendarEvent &, const std::string &)>
boost::signals2::signal < void(const std::vector < cl_gcalcli::CalendarEvent > &)>
boost::signals2::signal < void(int exit_code, const std::string &output)>
boost::signals2::signal < void(const std::string &error)>
boost::signals2::signal < void()>
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
< void(const cl_gcalcli ::CalendarEvent &)>
< void(const cl_gcalcli ::CalendarEvent &, const std::string &)>
< void(const std::vector < cl_gcalcli::CalendarEvent > &)>
< void(int exit_code, const std::string &output)>
< void(const std::string &error)>
< void()>
-events_mutex_
-mutex_
smacc2::SmaccSignal < void(const cl_gcalcli ::CalendarEvent &)>
smacc2::SmaccSignal < void(const cl_gcalcli ::CalendarEvent &, const std::string &)>
smacc2::SmaccSignal < void(const std::vector < cl_gcalcli::CalendarEvent > &)>
optional< rclcpp::Duration >
optional< rclcpp::Time >
bool
smacc2::SmaccSignal < void(int exit_code, const std::string &output)>
smacc2::SmaccSignal < void(const std::string &error)>
smacc2::SmaccSignal < void()>
-periodDuration_
-lastUpdate_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
-initialized_
+onCommandCompleted_
+onCommandFailed_
smacc2::client_core _components::CpSubprocessExecutor
+ CpSubprocessExecutor()
+ ~CpSubprocessExecutor()
+ onInitialize()
+ executeCommand()
+ executeCommandAsync()
+ onCommandCompleted()
+ onCommandFailed()
time_point
+onAuthenticationRequired
+onConnectionLost
+onConnectionRestored_
function< void()>
ConnectionState
+onAgendaIUpdated_
-last_heartbeat_time_
-subprocess_executor_
+postAuthenticationRequired Event_
+postConnectionLostEvent
+postConnectionRestored Event_
-connection_state_
cl_gcalcli::CpGcalcliConnection
+ CpGcalcliConnection()
+ ~CpGcalcliConnection()
+ onInitialize()
+ configure()
+ getConnectionState()
+ isConnected()
+ checkConnection()
+ restartConnection()
+ executeGcalcli()
+ getConfig()
+ onConnectionLost()
+ onConnectionRestored()
+ onAuthenticationRequired()
+ onStateOrthogonalAllocation()
# update()
- performHeartbeat()
- handleConnectionStateChange()
- isAuthenticationError()
+onEventEnded_ +onEventStarted_
+onEventDetected_
-initialized_
-last_poll_attempt_
function< void(const std::vector< cl_gcalcli ::CalendarEvent > &)>
time_point
vector< cl_gcalcli ::CalendarEvent >
-last_poll_time_
-connection_
-cached_events_
+postAgendaIUpdatedEvent_
cl_gcalcli::CpCalendarPoller
+ CpCalendarPoller()
+ ~CpCalendarPoller()
+ onInitialize()
+ refreshAgenda()
+ getEvents()
+ findEvents()
+ getEventsInWindow()
+ getActiveEvents()
+ getLastPollTime()
+ onAgendaIUpdated()
+ onStateOrthogonalAllocation()
# update()
- parseTsvOutput()
- parseTsvLine()
- parseDateTime()
- generateEventId()
function< void(const cl_gcalcli::CalendarEvent &, const std::string &)>
function< void(const cl_gcalcli::CalendarEvent &)>
vector< cl_gcalcli ::EventWatch >
set< std::string >
-current_events_
+postEventDetectedEvent_
+postEventEndedEvent_
+postEventStartedEvent_
-poller_
-watches_
-triggered_events_
cl_gcalcli::CpCalendarEvent Listener
+ CpCalendarEventListener()
+ ~CpCalendarEventListener()
+ onInitialize()
+ addWatch()
+ clearWatches()
+ getWatches()
+ resetTriggeredEvents()
+ onEventDetected()
+ onEventStarted()
+ onEventEnded()
+ onStateOrthogonalAllocation()
# update()
- onAgendaIUpdated()
- matchesPattern()
- shouldTriggerStart()
- shouldTriggerEnd()
- getTriggeredKey()