


```
boost::statechart::  
event< EvTransitionDestroy  
< TSourceObject, TOrthogonal > >
```

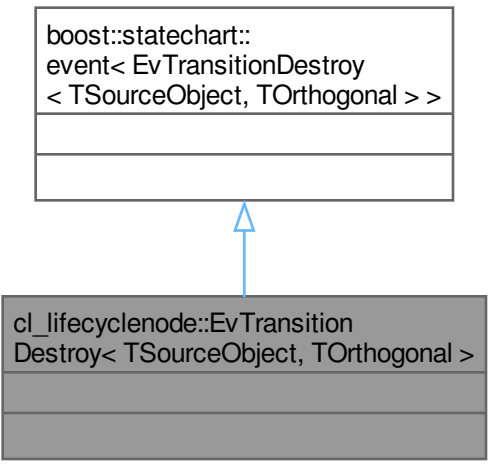

```
classDiagram
    class boost_statechart_event["boost::statechart::event< EvTransitionDestroy< TSourceObject, TOrthogonal > >"]
    class cl_lifecyclenode_evtransition_destroy["cl_lifecyclenode::EvTransitionDestroy< TSourceObject, TOrthogonal >"]
    cl_lifecyclenode_evtransition_destroy --|> boost_statechart_event
```

The diagram shows two class boxes. The top box is white with a black border and contains the text 'boost::statechart::event< EvTransitionDestroy< TSourceObject, TOrthogonal > >'. It has two empty rectangular compartments below the text. The bottom box is gray with a black border and contains the text 'cl_lifecyclenode::EvTransitionDestroy< TSourceObject, TOrthogonal >'. It also has two empty rectangular compartments below the text. A blue arrow with an open triangular head points from the top of the bottom box to the bottom of the top box, indicating inheritance.

```
cl_lifecyclenode::EvTransition  
Destroy< TSourceObject, TOrthogonal >
```