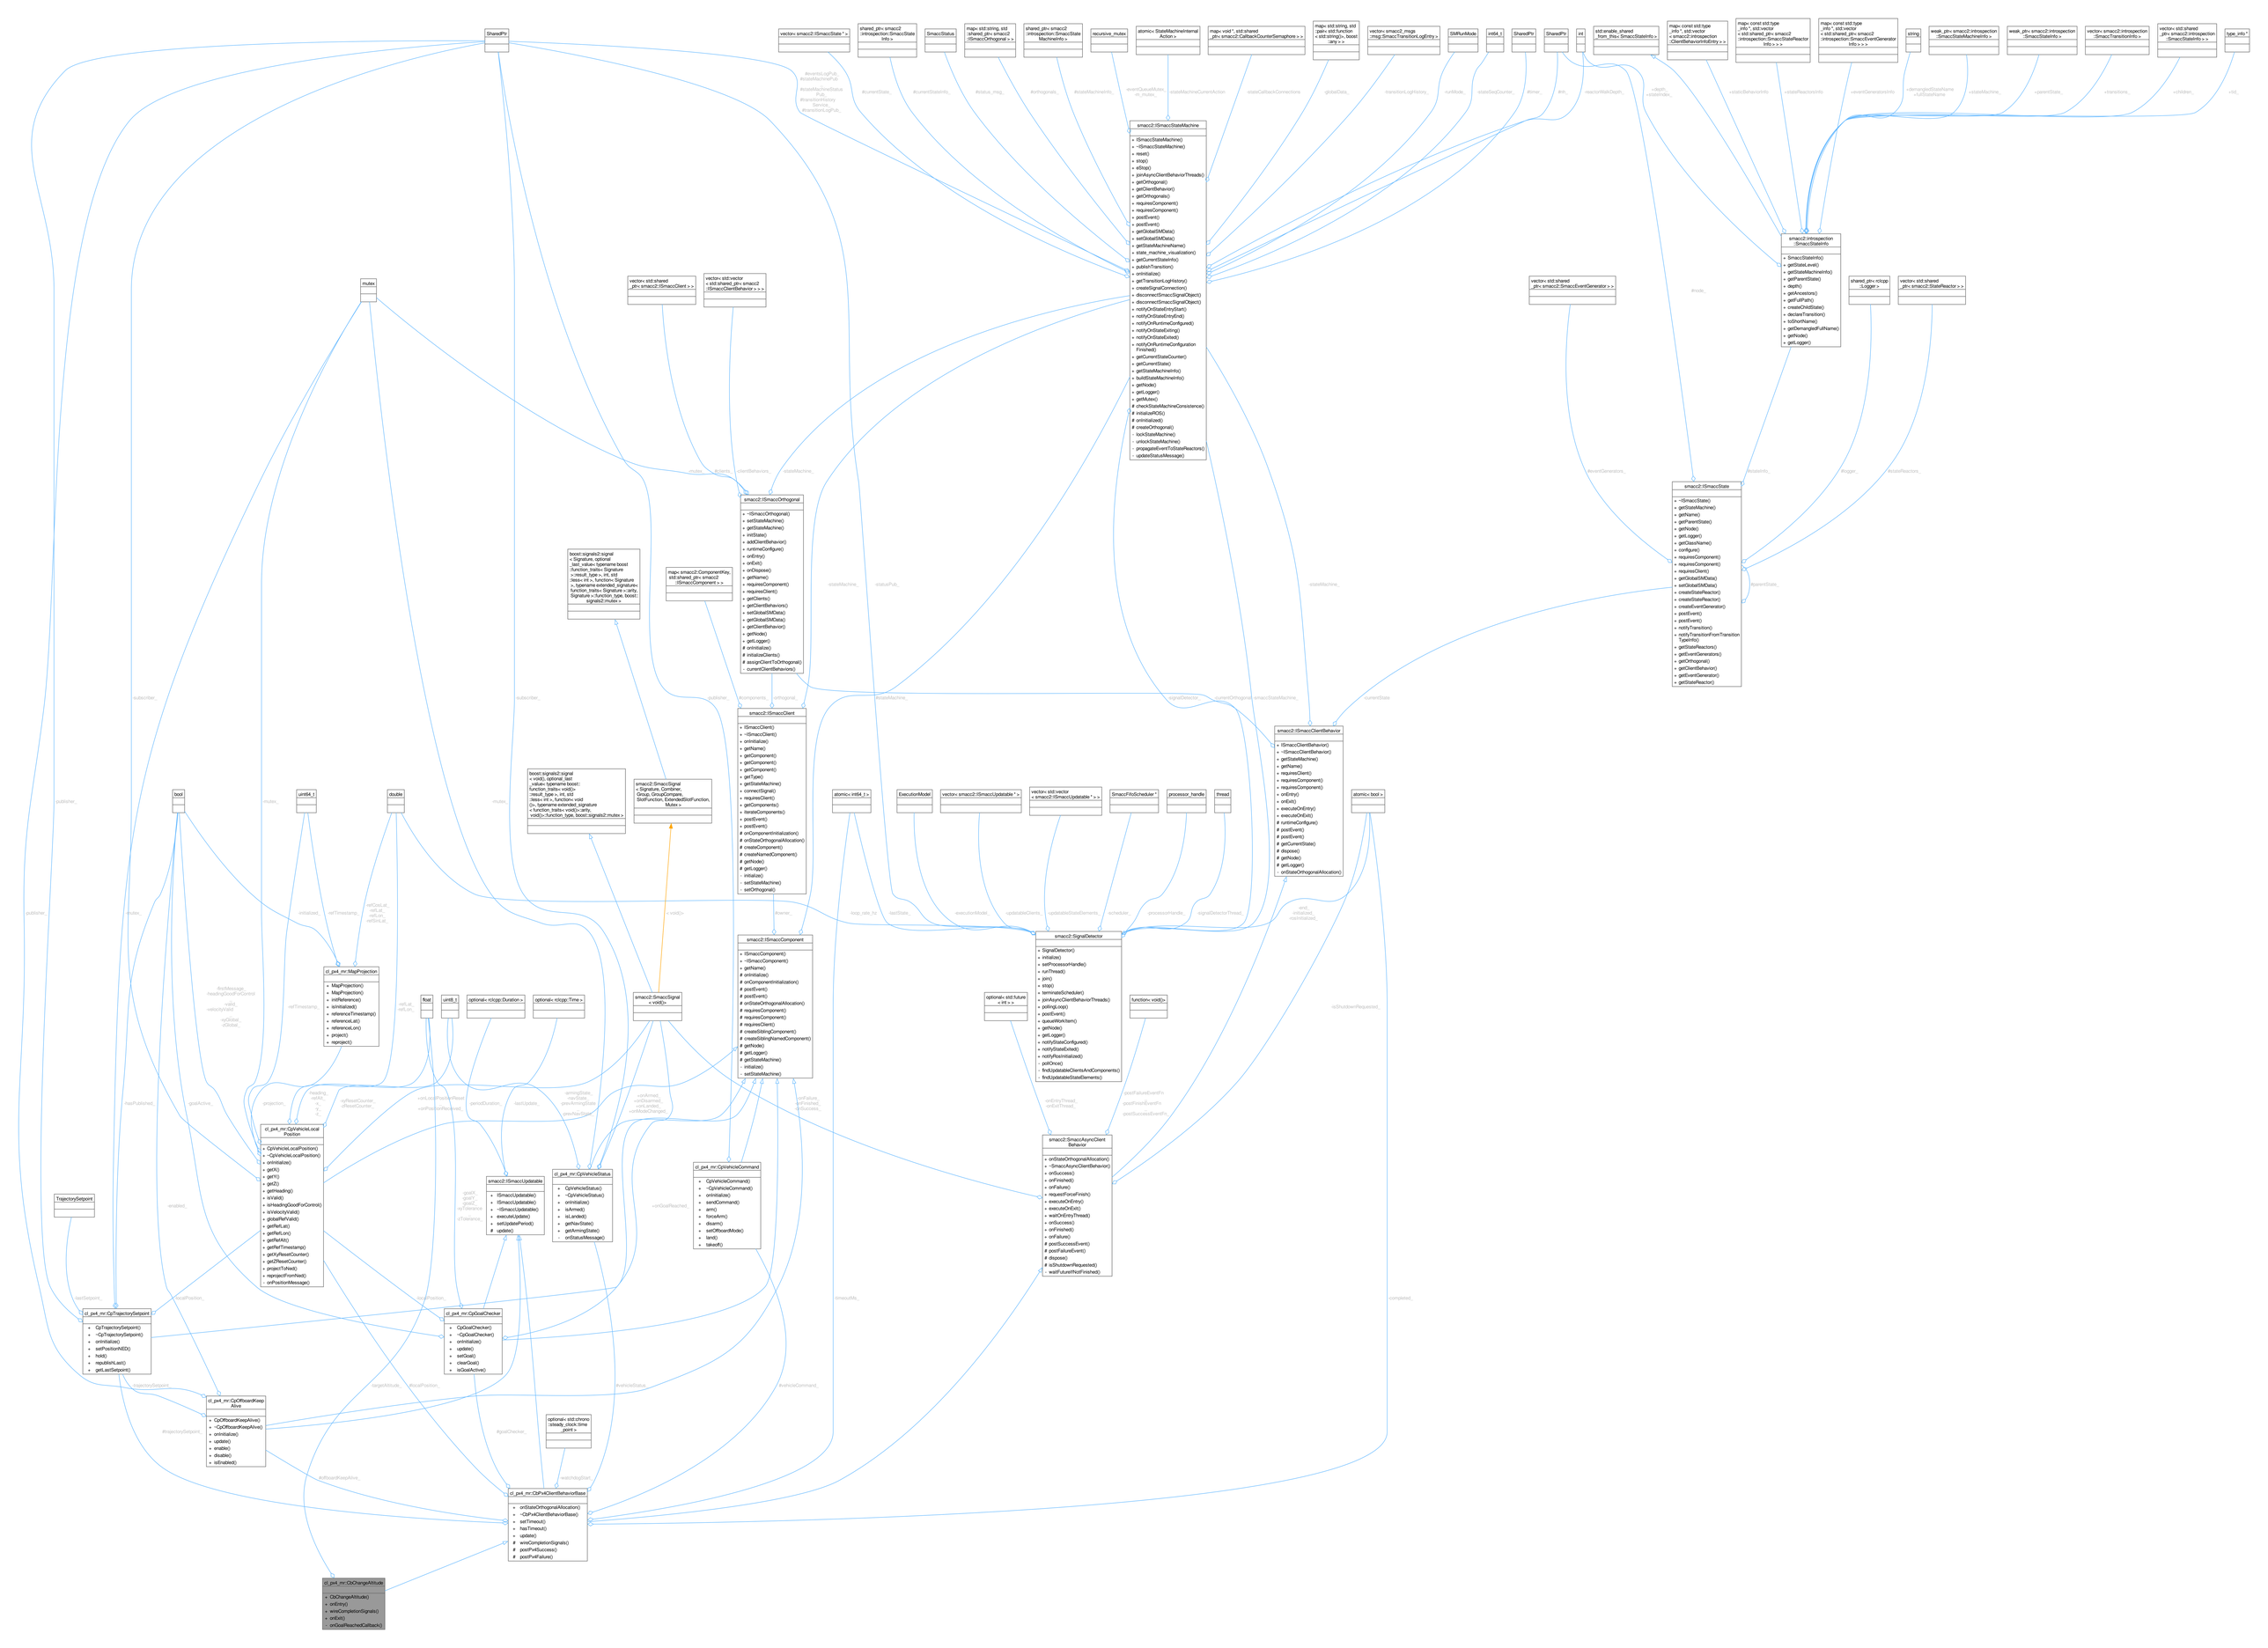
SharePtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::ISmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
shared_ptr< smacc2 ::introspection::ISmaccState MachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string(),_boost ::any > >
vector< smacc2_msgs ::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharePtr
SharePtr
int
std::enable_shared _from_this< SmaccStateInfo >
map< const std::type _info *, std::vector < ClientBehaviorInfoEntry > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccEventGenerator Info > > >
string
weak_ptr< smacc2::introspection ::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection ::SmaccStateInfo >
vector< smacc2::introspection ::SmaccTransitionInfo >
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
type_info *
#eventLogPub_
#stateMachineInfoPub_
#stateMachineStatus Pub_
#transitionHistory Client_
#transitionLogPub_
#currentState_
#currentStateInfo_
#status_msg_
#orthogonals_
#stateMachineInfo_
#eventQueueMutex_ m_mutex_
#stateMachineCurrentAction
#stateCallBackConnections
#globalData_
#transitionLogHistory_
#runMode_
#stateSeqCounter_
#timer_
#rh_
#reactorWalkDepth_
#depth_ #stateIndex_
#staticBehaviorInfo
#stateReactorsInfo
#eventGeneratorsInfo
#demangledStateName #fullStateName
#stateMachine_
#parentState_
#transitions_
#children_
#id_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getHode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getHode()
+ getLogger()
vector< std::shared _ptr< smacc2::ISmaccClient > >
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
mutex
#mutex_
#clients_
#clientBehaviors_
#stateMachine_
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
#eventGenerators_
shared_ptr< rclcpp ::Logger >
vector< std::shared _ptr< smacc2::StateReactor > >
#logger_
#stateReactors_
smacc2::ISmaccOrthogonal
+ ~ISmaccOrthogonal()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getHode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
#stateMachine_
#statusPub_
#components_
#orthogonal_
#signalDetector_
#currentOrthogonal_
#smaccStateMachine_
#currentState
boost::signals2::signal < Signature, optional _last_value< typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature > > mutex< typename boost::function_traits< Signature >::arity, Signature >::function_type, boost:: signals2::mutex >
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getHode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccState
+ ~ISmaccState()
+ getStateMachine()
+ getName()
+ getParentState()
+ getHode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#stateInfo_
#parentState_
boost::signals2::signal < void(), optional_last _value< typename boost:: function_traits< void()> ::result_type >, int, std ::less< int >, function< void () >, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
atomic< int64_t >
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector < smacc2::ISmaccUpdatable * > >
SmaccFifoScheduler *
processor_handle
thread
atomic< bool >
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getHode()
# getLogger()
- onStateOrthogonalAllocation()
bool
uint64_t
double
#subscriber_
#publisher_
#mutex_
#initialized_
#refTimestamp_
#refLat_ #refLon_ #refUnitLat_
#firstMessage_ #readingSizeForControl
#valid_ #velocityValid_
#refGlobal_ #cGlobal_
#refTimestamp_
#reading_ #dtAll_ #x_ #y_ #z_
#myResetCounter_ #lResetCounter_
#hasPublished_
#goalActive_
#projection_
#refLat_ #refLon_
float
uint8_t
optional< rclcpp::Duration >
optional< rclcpp::Time >
smacc2::SmaccSignal < void()>
#onLocalPositionReset
#onPositionReceived_
#periodDuration_
#lastUpdate_
#armingState_ #navState_ #prevArmingState_ #prevNavState_
#onArmed_ #onDisarmed_ #onLanded_ #onModeChanged_
#onFailure_ #onFinished_ #onSuccess_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
#goalX_ #goalY_ #goalZ_ #yTolerance_
#dTolerance_
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
#onGoalReached_
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFuturesNotFinished()
#onEntryThread_ #onExitThread_
#postFailureEventFn
#postFinishEventFn
#postSuccessEventFn
optional< std::future < int > >
function< void()>
#isShutdownRequested_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getHode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyReinitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
#loop_rate_hz_
#lastState_
#executionMode_
#updatableClients_
#updatableStateElements_
#scheduler_
#processorHandle_
#signalDetectorThread_
#end_ #initialized_ #startInitialized_
cl_px4_mr::CpVehicleLocal Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ project(ToNed()
+ reprojectFromNed()
- onPositionMessage()
#projection_
#reading_ #dtAll_ #x_ #y_ #z_
#myResetCounter_ #lResetCounter_
#onLocalPositionReset
#onPositionReceived_
#hasPublished_
#goalActive_
#enabled_
#localPosition_
#refTimestamp_
#refLat_ #refLon_ #refUnitLat_
#firstMessage_ #readingSizeForControl
#valid_ #velocityValid_
#xyGlobal_ #zGlobal_
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
TrajectorySetpoint
#lastSetpoint_
#trajectorySetpoint_
#localPosition_
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
#goalX_ #goalY_ #goalZ_ #yTolerance_
#dTolerance_
#goalChecker_
#localPosition_
cl_px4_mr::CpOffboardKeep Alive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
#offboardKeepAlive_
#trajectorySetpoint_
#targetAltitude_
#localPosition_
#vehicleStatus_
#vehicleCommand_
#loop_rate_hz_
#lastState_
#executionMode_
#updatableClients_
#updatableStateElements_
#scheduler_
#processorHandle_
#signalDetectorThread_
#end_ #initialized_ #startInitialized_
#isShutdownRequested_
#timeoutMs_
#completed_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
+ onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponents()
# createSiblingNamedComponent()
# getHode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
optional< std::chrono ::steady_clock::time _point >
#watchdogStart_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
cl_px4_mr::CbChangeAttitude
+ CbChangeAttitude()
+ onEntry()
+ wireCompletionSignals()
+ onExit()
- onGoalReachedCallback()