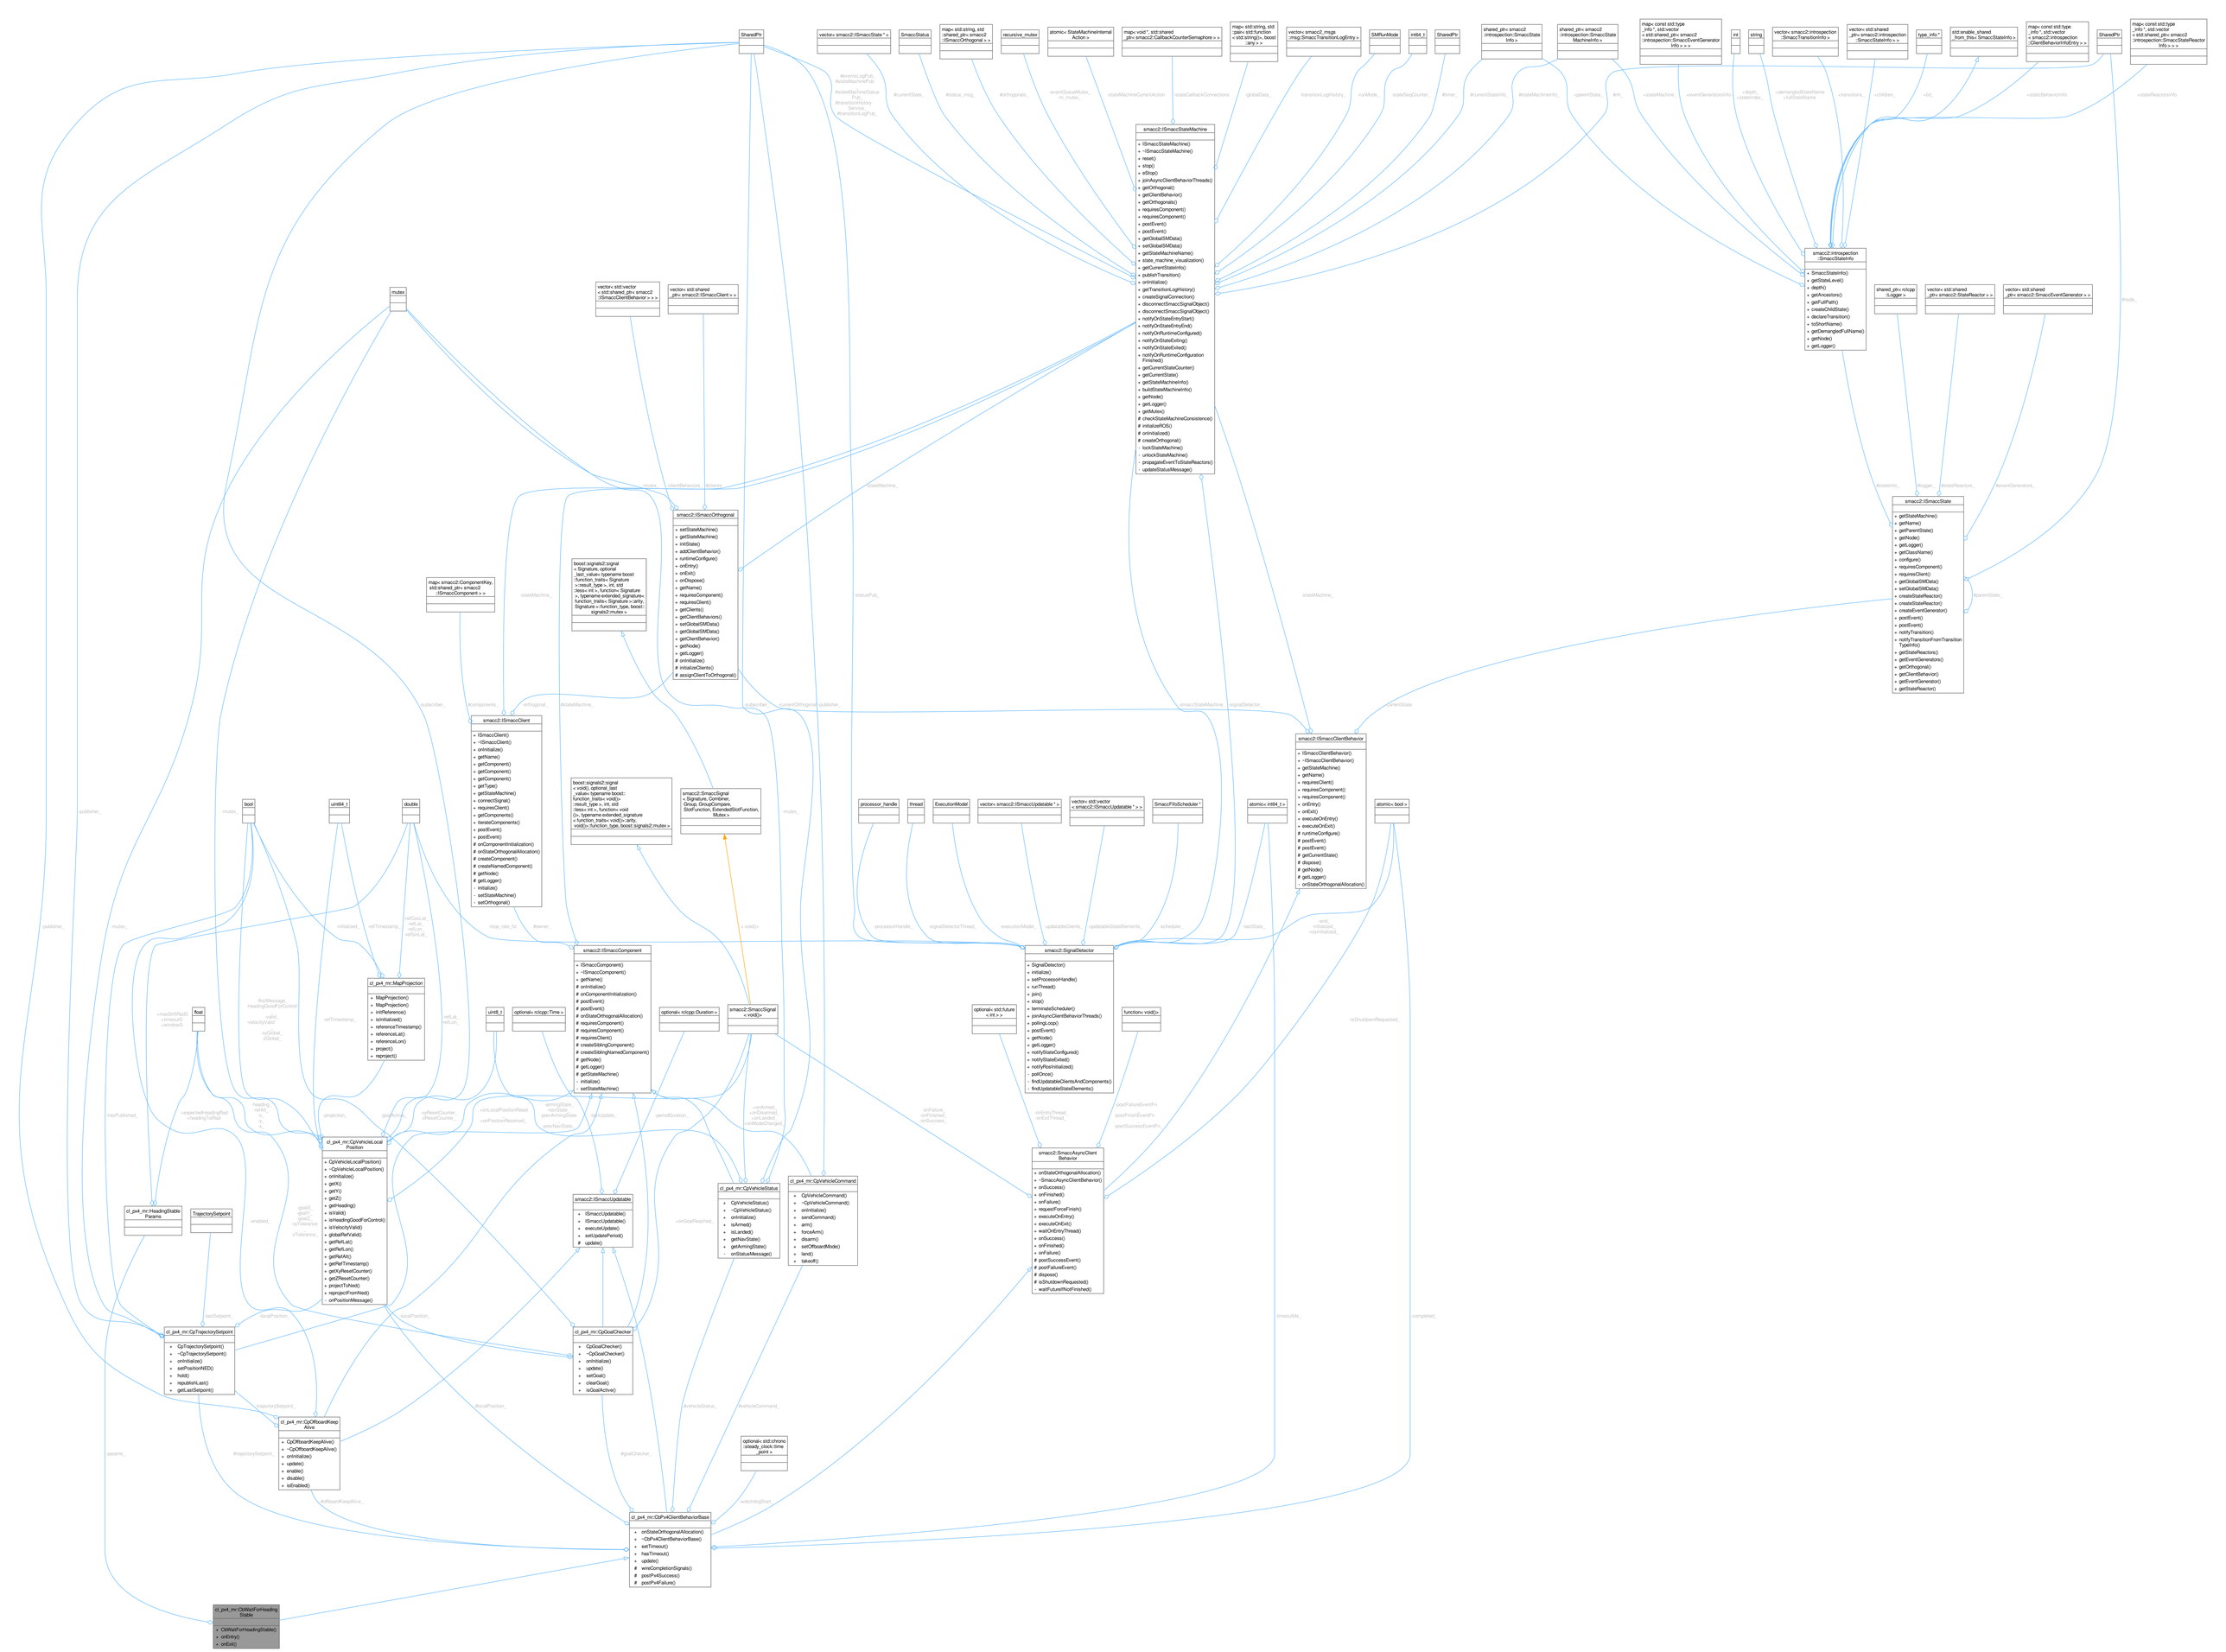
SharedPtr
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string()>, boost ::any > >
vector< smacc2::msgs ::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
shared_ptr< smacc2 ::introspection::SmaccState Info >
shared_ptr< smacc2 ::introspection::SmaccState MachineInfo >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccEventGenerator Info > > >
int
string
vector< smacc2::introspection ::SmaccTransitionInfo >
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
type_info *
std::enable_shared _from_this< SmaccStateInfo >
map< const std::type _info *, std::vector < smacc2::introspection ::ClientBehaviorInfoEntry > >
SharedPtr
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
#eventsLogPub_
#stateMachineInfoPub_
#stateMachineStatus _msg_
#transitionHistory _service_
#transitionLogPub_
-currentState_
#status_msg_
#orthogonals_
-eventQueueMutex _m_mutex_
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-runMode_
-stateSeqCounter_
#timer_
#currentStateInfo_
#stateMachineInfo_
-parentState_
#fn_
-stateMachine_
-eventGeneratorInfo_
-depth_
-stateIndex_
-demangledStateName _fullStateName
-transitions_
-children_
-id_
-staticBehaviorInfo
-stateReactorInfo
#node_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ oninitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignal(Object)
+ disconnectSmaccSignal(Object)
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# oninitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
shared_ptr< rclcpp ::Logger >
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
#stateInfo_
#logger_
#stateReactors_
#eventGenerators_
mutex
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
vector< std::shared _ptr< smacc2::ISmaccClient > >
-mutex_
-clientBehaviors_
#clients_
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# oninitialize()
# initializeClients()
# assignClientToOrthogonal()
-stateMachine_
-statusPub_
-stateMachine_
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
boost::signals2::signal < Signature, optional _last_value< typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost:: signals2::mutex >
-stateMachine_
-orthogonal_
#components_
-subscriber_
-subscriber_
-currentOrthogonal_
-publisher_
-stateMachine_
-signalDetector_
-eventState
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ oninitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
+ onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#parentState_
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
boost::signals2::signal < void(), optional_last _value< typename boost:: function_traits< void()> ::result_type >, int, std ::less< int >, function< void ()>, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable* >
vector< std::vector < smacc2::ISmaccUpdatable* > >
SmaccFifoScheduler *
atomic< int64_t >
atomic< bool >
-mutex_
-initialized_
-initTimestamp_
-initCostLat_
-initLat_
-initSinLat_
#loop_rate_hz
#owner_
< void()>
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-updatableStateElements_
-scheduler_
-lastState_
-end_
-initialized_
-isInitialized_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyResInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
-isShutdownRequested_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# oninitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
cl_p4_mr::MapProjection
+ MapProjection()
+ MapProjection()
+ initReferences()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
float
uint8_t
optional< rclcpp::Time >
optional< rclcpp::Duration >
smacc2::SmaccSignal < void()>
optional< std::future < R$ > >
function< void()>
-hasDriftRad
-timeout
-windowS
-firstMessage_
-headingGoodForControl
-valid_
-velocityValid
-myGlobal_
-dGlobal_
-refTimestamp_
-refLat_
-refLon_
-hasPublished_
-expectedHeadingRad
-headingToRad
-headingGoodForControl
-refLat_
-x_
-y_
-z_
-projection_
-goalReached_
-sysResetCounter_
-sysResetCounter_
-onLocalPositionReset
-onPositionReceived_
-prevArmingState
-prevNavState_
-lastUpdate_
-periodDuration_
-onArmed_
-onDisarmed_
-onLanded_
-onModeChanged_
-onFailure_
-onFinished_
-onSuccess_
-postFailureEventFn
-postFirstEventFn
-postSuccessEventFn
cl_p4_mr::ClpVehicleLocal Position
+ ClpVehicleLocalPosition()
+ ~ClpVehicleLocalPosition()
+ oninitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
cl_p4_mr::HeadingStable Params
TrajectorySetpoint
-goalX_
-goalY_
-goalZ_
-xyTolerance_
-zTolerance_
-enabled_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
cl_p4_mr::ClpVehicleStatus
+ ClpVehicleStatus()
+ ~ClpVehicleStatus()
+ oninitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
cl_p4_mr::ClpVehicleCommand
+ ClpVehicleCommand()
+ ~ClpVehicleCommand()
+ oninitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFuturesIfNotFinished()
-lastSetpoint_
-localPosition_
-localPosition_
-localPosition_
cl_p4_mr::ClpTrajectorySetpoint
+ ClpTrajectorySetpoint()
+ ~ClpTrajectorySetpoint()
+ oninitialize()
+ setPositionNED()
+ hold()
+ repubMrhLast()
+ getLastSetpoint()
cl_p4_mr::ClpGoalChecker
+ ClpGoalChecker()
+ ~ClpGoalChecker()
+ oninitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
-timeoutMs_
-completed_
-trajectorySetpoint_
-trajectorySetpoint_
-offboardKeepAlive_
-vehicleStatus_
-vehicleCommand_
cl_p4_mr::ClpOffboardKeep Alive
+ ClpOffboardKeep Alive()
+ ~ClpOffboardKeepAlive()
+ oninitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
optional< std::chrono ::steady_clock::time _point >
-goalChecker_
-watchdogStart_
-params_
cl_p4_mr::ClbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~ClbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
cl_p4_mr::ClbWaitForHeading Stable
+ ClbWaitForHeadingStable()
+ onEntry()
+ onExit()