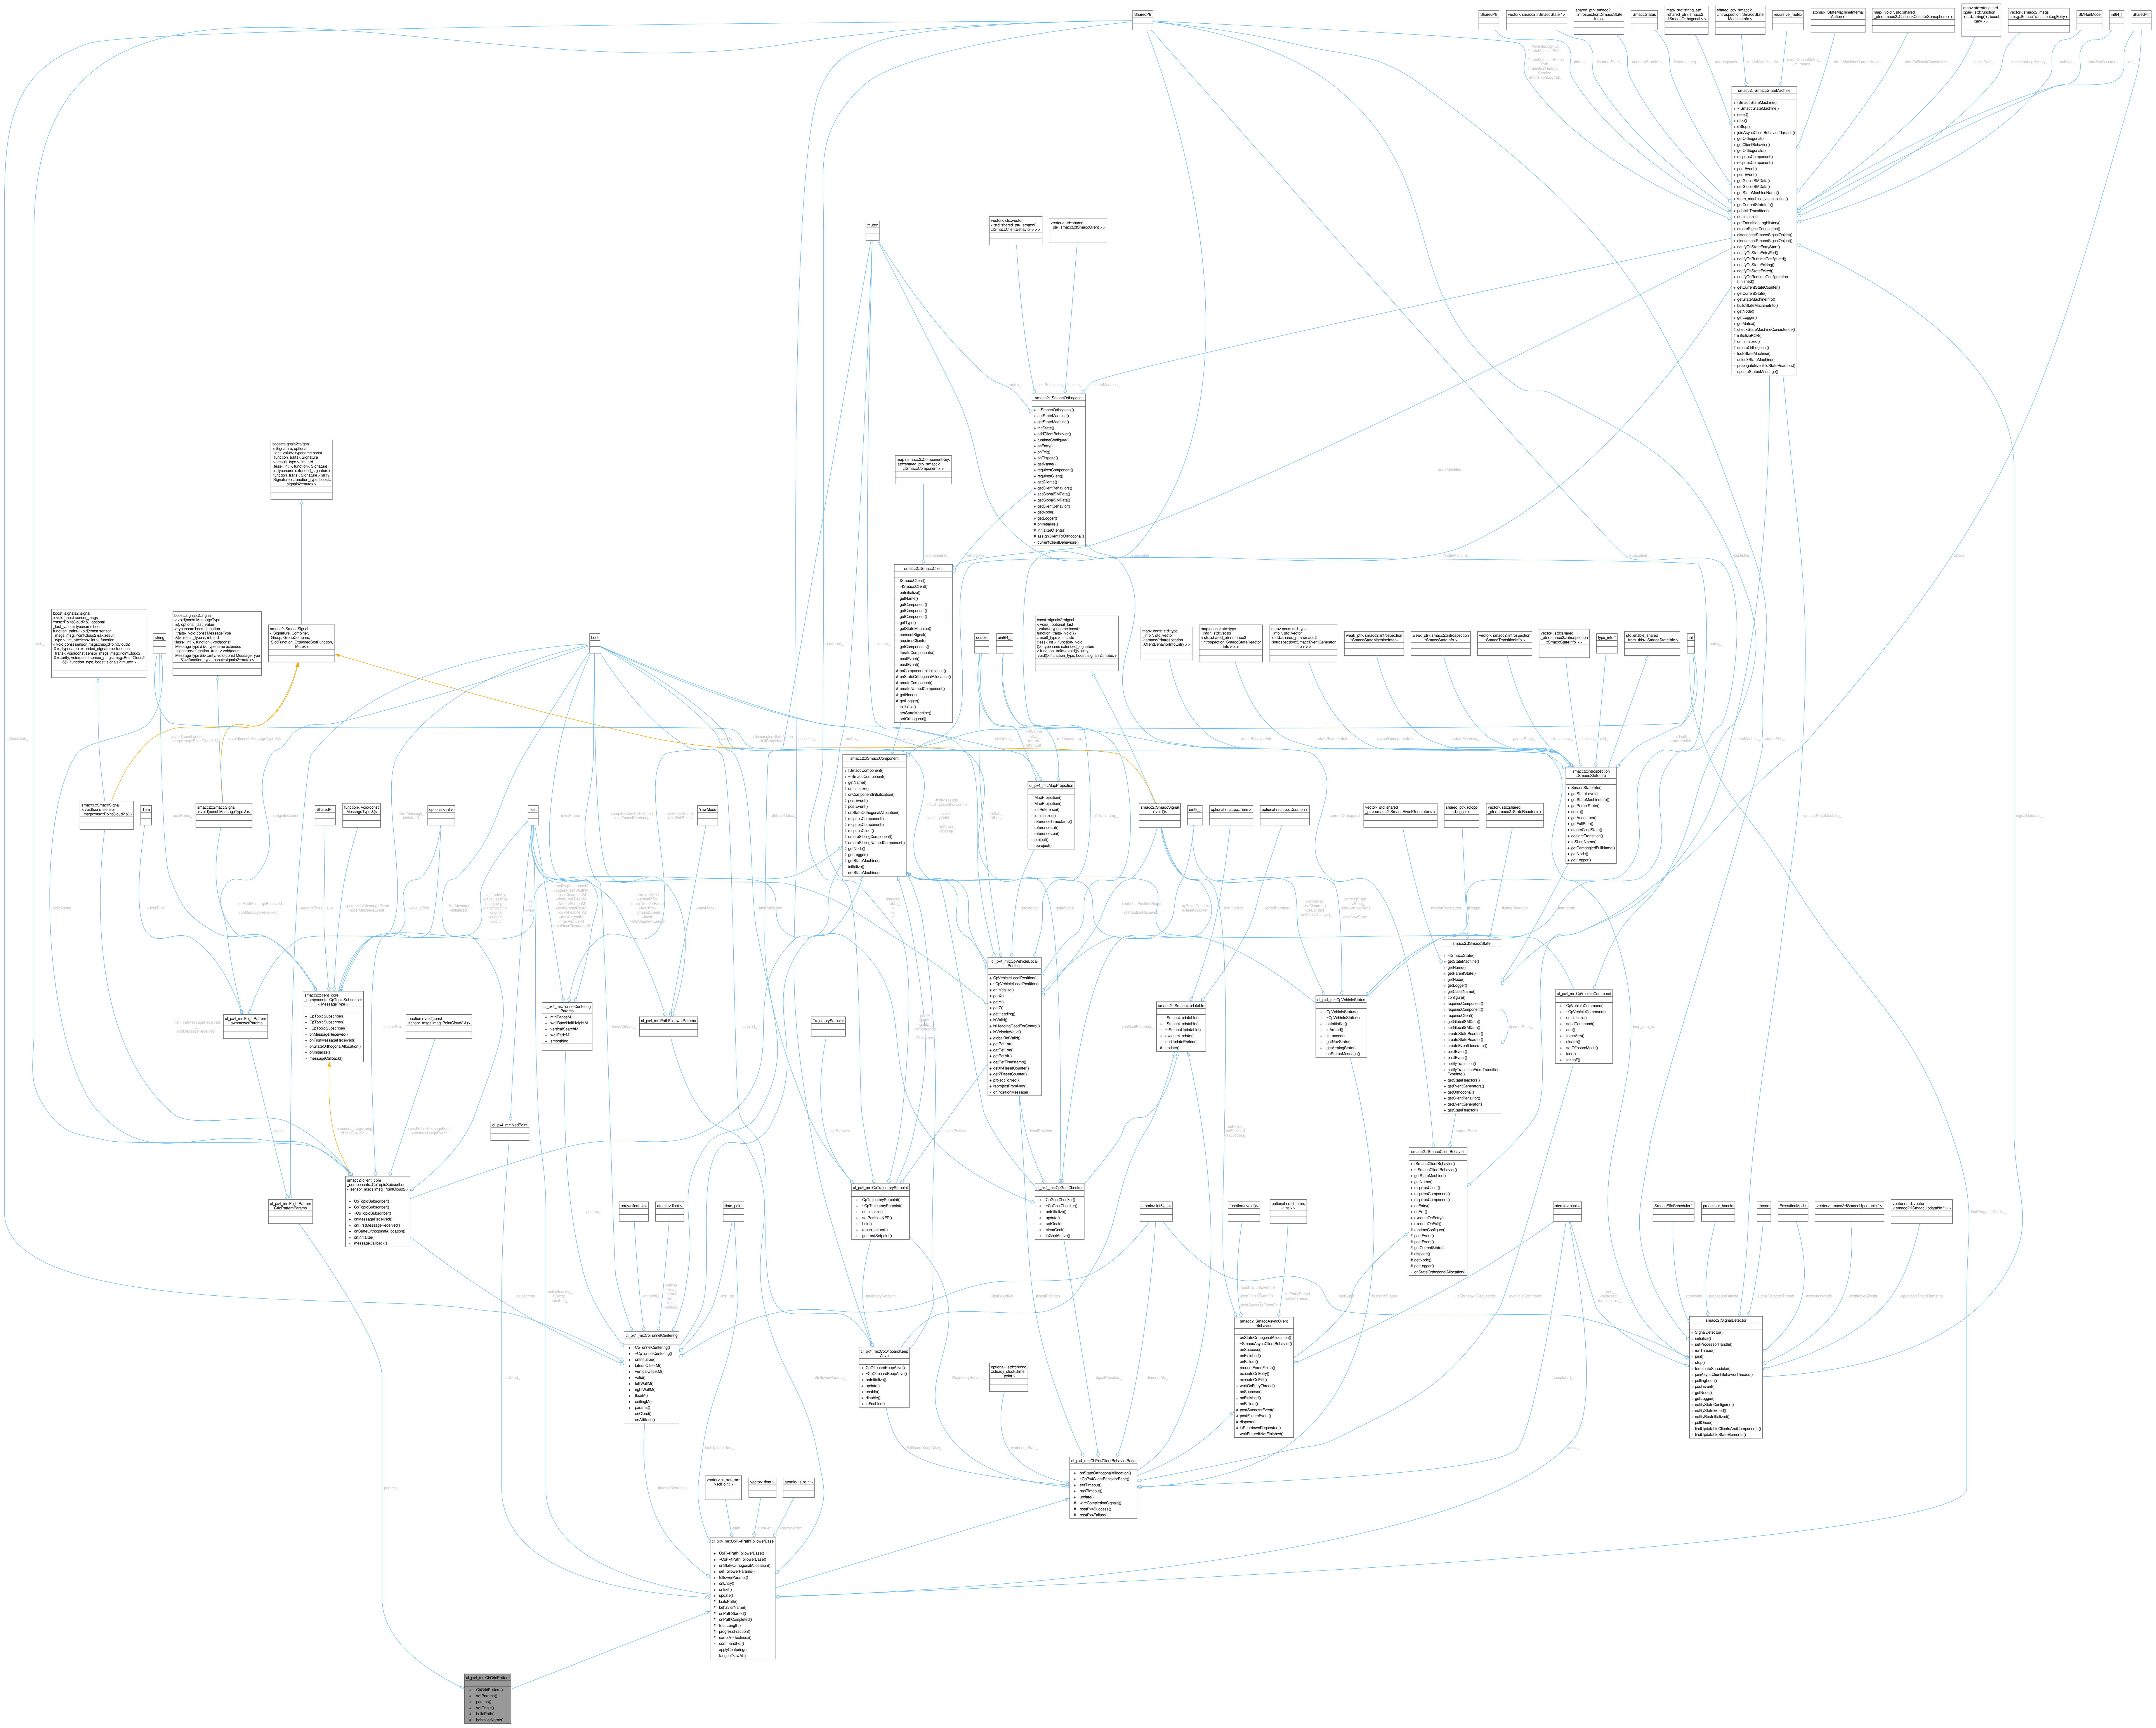
cl_px4_mr::CbGridPattern
+ CbGridPattern()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
#tunnelCentering_
-lastUpdateTime_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#offboardKeepAlive_
-watchdogStart_
#followerParams_
#trajectorySetpoint_
#goalChecker_
-timeoutMs_
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
array< float, 4 >
atomic< float >
time_point
-params_
-attitudeQ_
-ceiling_
-floor_
-lateral_
-left_
-right_
-vertical_
-lastLog_
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
-lastSetpoint_
-localPosition_
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
-trajectorySetpoint_
-lastCloudNs_
#localPosition_
optional< std::chrono::steady_clock::time_point >
atomic< int64_t >
function< void()>
optional< std::future< int > >
-onFailure_
-onFinished_
-onSuccess_
-postFailureEventFn_
-postFinishEventFn_
-postSuccessEventFn_
-onEntryThread_
-onExitThread_
smacc2::SmaccAsyncClientBehavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::ISmaccStateMachine
smacc2::ISmaccOrthogonal
smacc2::ISmaccClient
smacc2::ISmaccComponent
smacc2::ISmaccClientBehavior
smacc2::ISmaccState
smacc2::ISmaccUpdatable
smacc2::SignalDetector
smacc2::introspection::SmaccStateInfo
cl_px4_mr::CpVehicleLocalPosition
cl_px4_mr::CpVehicleStatus
cl_px4_mr::CpVehicleCommand
cl_px4_mr::MapProjection
cl_px4_mr::FlightPatternLawnmowerParams
cl_px4_mr::FlightPatternGridPatternParams
cl_px4_mr::TunnelCenteringParams
cl_px4_mr::PathFollowerParams
cl_px4_mr::NedPoint
SharedPtr
mutex
bool
float
double
string