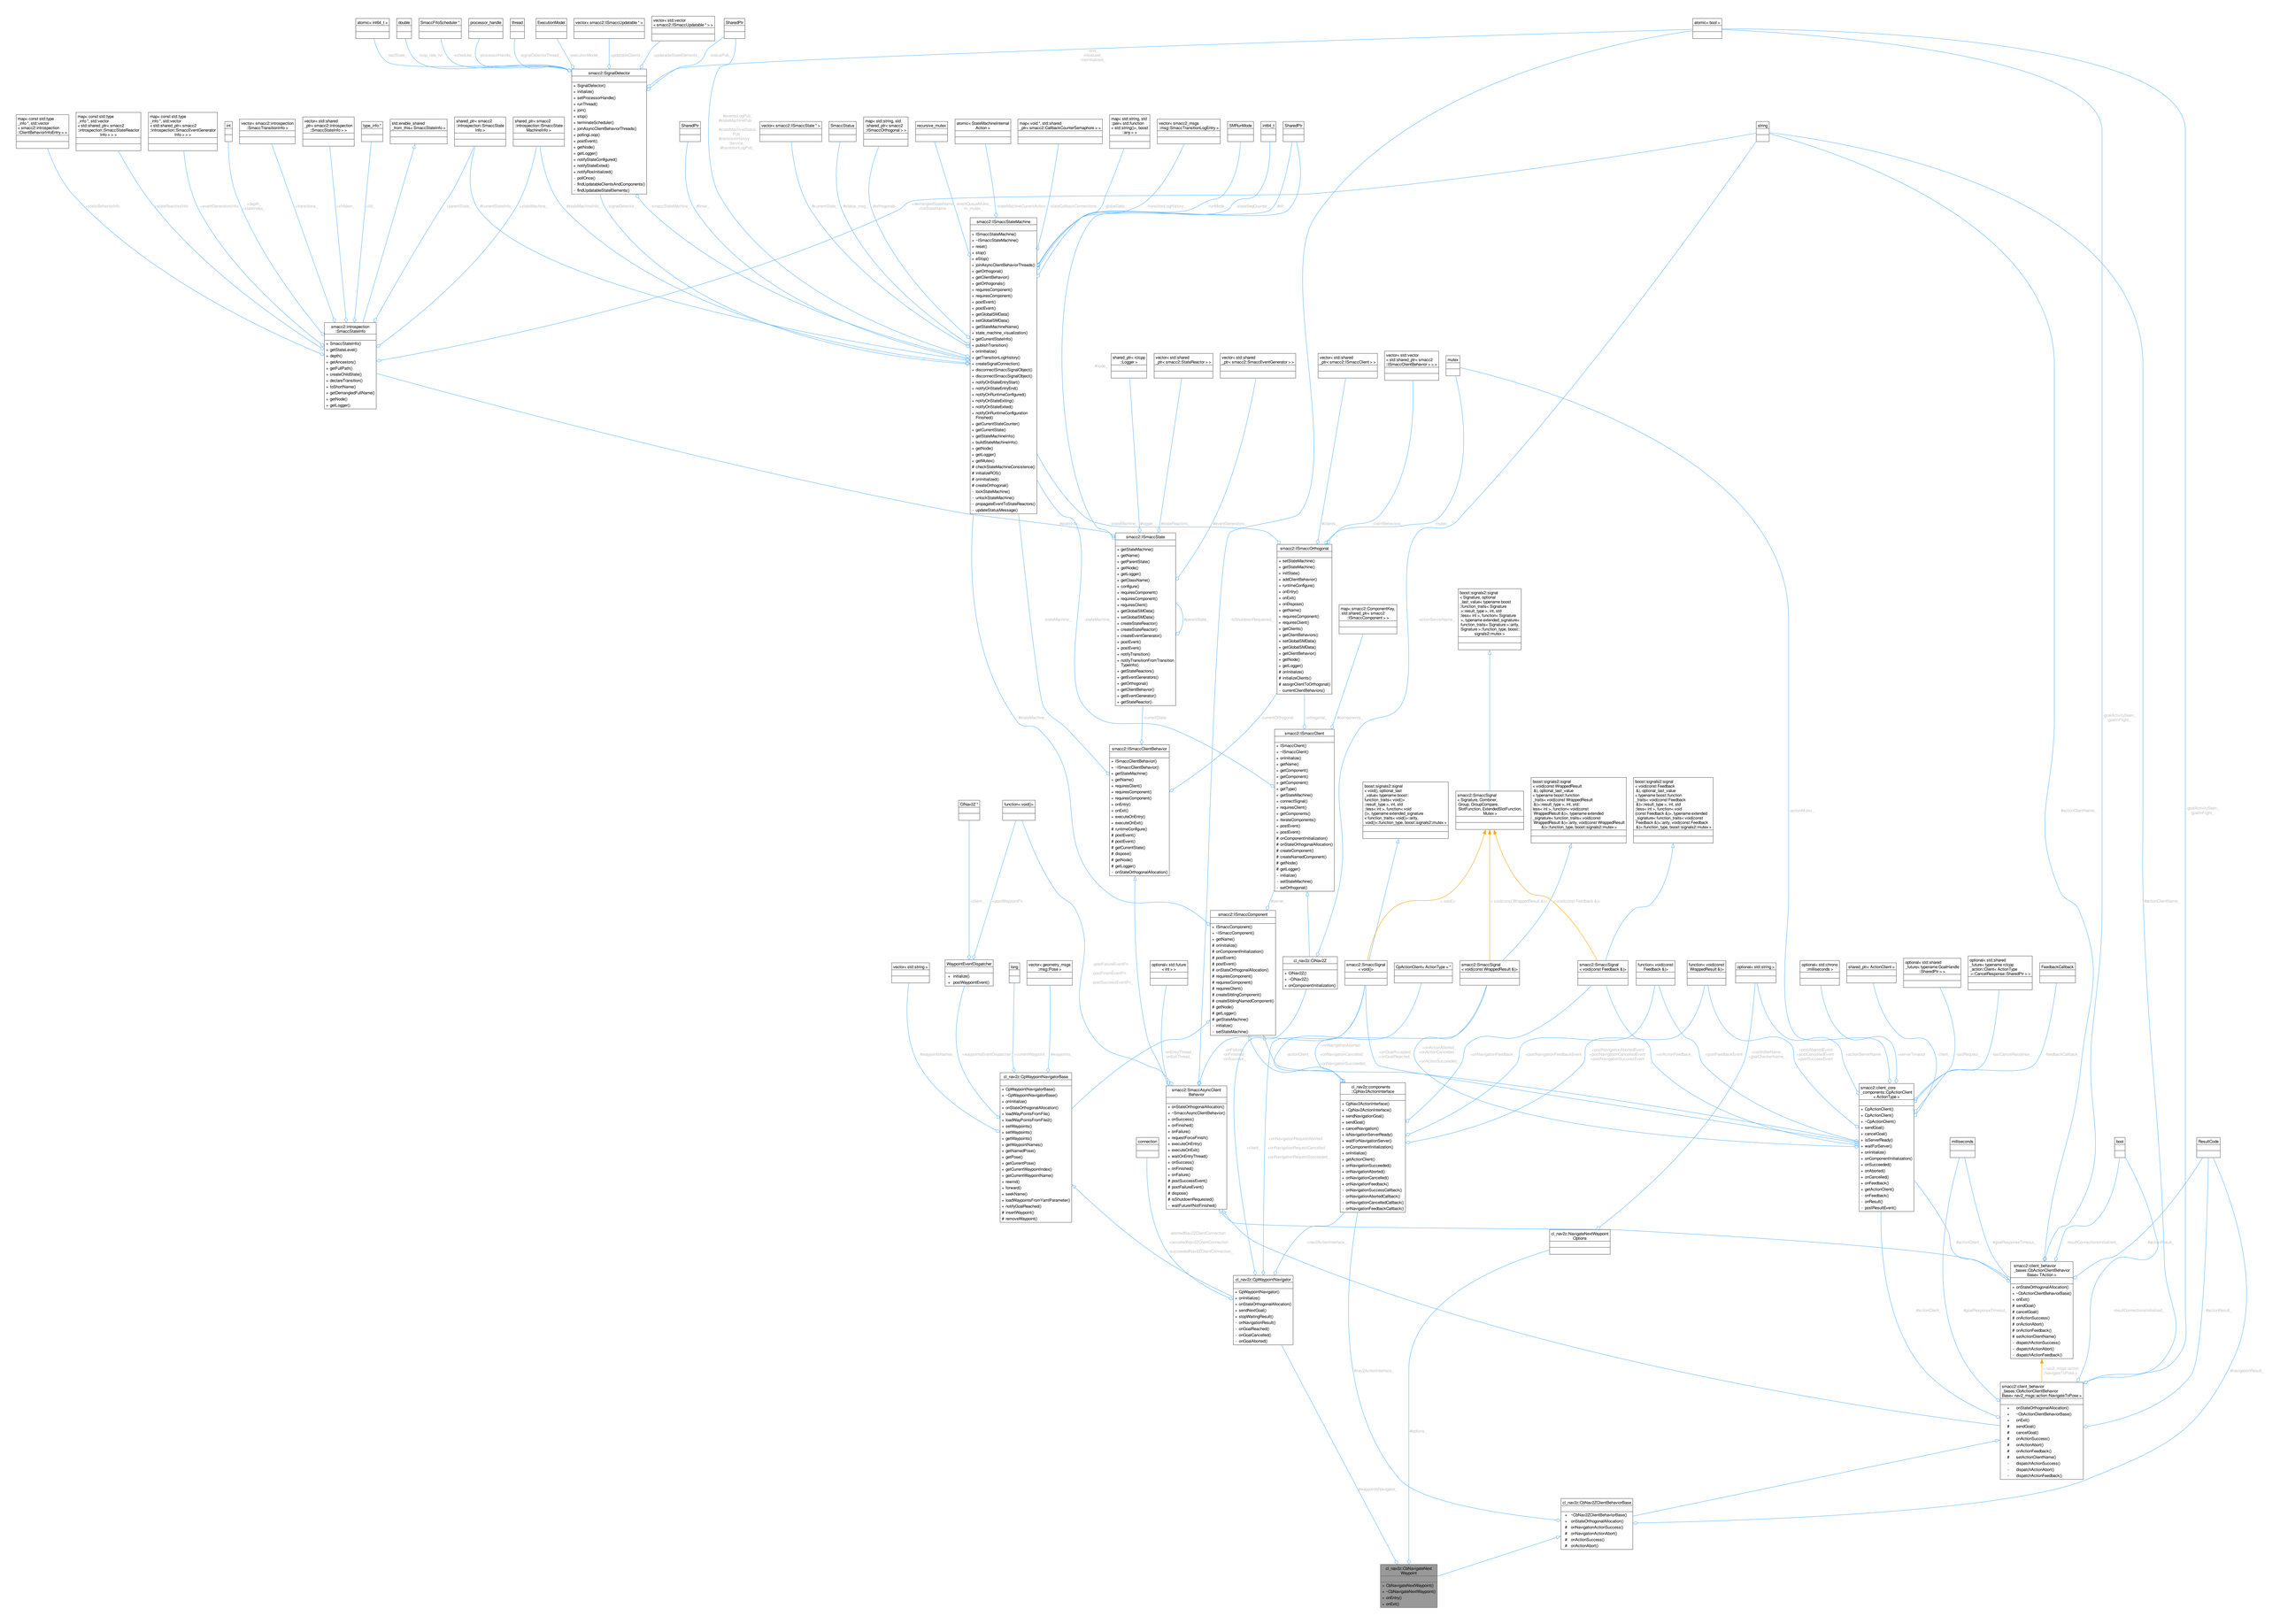
atomic< int64_t >
double
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector < smacc2::ISmaccUpdatable * > >
SharedPtr
atomic< bool >
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRuntimeInitialized()
+ pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
map< const std::type_info *, std::vector < smacc2::introspection::ClientBehaviorAndEntry > >
map< const std::type_info *, std::vector < std::shared_ptr< smacc2::introspection::SmaccStateReactorInfo > > >
map< const std::type_info *, std::vector < std::shared_ptr< smacc2::introspection::SmaccEventGeneratorInfo > > >
int
vector< smacc2::introspection::SmaccTransitionInfo >
vector< std::shared_ptr< smacc2::introspection::SmaccStateInfo > >
type_info *
std::enable_shared_from_this< SmaccStateInfo >
shared_ptr< smacc2 ::introspection::SmaccStateInfo >
shared_ptr< smacc2 ::introspection::SmaccStateMachineInfo >
SharedPtr
#eventLogPub
#stateMachinePub
#stateMachineStatusPub
#transitionHistory Service
#transitionLogPub
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string(), boost ::any > > >
vector< smacc2::msgs ::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
string
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
shared_ptr< rclcpp ::Logger >
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
vector< std::shared _ptr< smacc2::ISmaccClient > >
vector< std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
mutex
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getStateName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
boost::signals2::signal < Signature, optional _last_value = typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity +1, void(boost::signals2::mutex > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponents()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
boost::signals2::signal < void(), optional_last _value = typename boost::function _traits< void(boost::signals2 ::detail::void_type, int, std ::less< int >, function< void() >, typename extended _signature< function_traits< void() >::arity +1, void(boost::signals2::mutex > >
smacc2::SmaccSignal < void(const WrappedResult &)>
boost::signals2::signal < Signature, optional _last_value = typename boost::function _traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity +1, Signature > >
boost::signals2::signal < void(const WrappedResult &), Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal < void(const WrappedResult &), optional_last_value = typename boost::function _traits< void(const WrappedResult &)>::result_type >, int, std ::less< int >, function< void(const WrappedResult &)>, typename extended _signature< function_traits< void(const WrappedResult &)>::arity +1, void(const WrappedResult &), boost::signals2::mutex > >
boost::signals2::signal < void(const Feedback &), optional_last_value = typename boost::function _traits< void(const Feedback &)>::result_type >, int, std ::less< int >, function< void (const Feedback &)>, typename extended _signature< function_traits< void(const Feedback &)>::arity +1, void(const Feedback &), boost::signals2::mutex > >
cl_nav2z::ClPlugin
+ ClPlugin()
+ ~ClPlugin()
+ onInitialize()
cl_nav2z::ClNav2Z
+ ClNav2Z()
+ ~ClNav2Z()
+ onComponentInitialization()
smacc2::SmaccSignal < void() >
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename rclcpp ::GoalHandle ::SharedPtr > >
optional< std::shared _future< typename rclcpp ::action::ClientGoalHandle ::SharedPtr > >
+ CancelResponse::SharedPtr > >
FeedbackCallback
vector< std::string >
WaypointEventDispatcher
+ initialize()
+ postWaypointEvent()
long
vector< geometry_msgs ::msg::Pose >
cl_nav2z::ClPlugWaypointNavigatorBase
+ ClPlugWaypointNavigatorBase()
+ ~ClPlugWaypointNavigatorBase()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ loadWaypointsFromFile()
+ loadWaypointsFromFile2()
+ setWaypoints()
+ setWaypoints()
+ getWaypoints()
+ getWaypointNames()
+ getNamedPose()
+ getPose()
+ getCurrentPose()
+ getCurrentWaypointIndex()
+ getCurrentWaypointName()
+ rewind()
+ forward()
+ seekName()
+ loadWaypointsFromYamlParameter()
+ notifyGoalReached()
# insertWaypoint()
# removeWaypoint()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIsNotFinished()
cl_nav2z::components ::ClNav2ActionInterface
+ ClNav2ActionInterface()
+ ~ClNav2ActionInterface()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCancelled()
+ onNavigationFeedback()
- onNavigationSuccessCallback()
- onNavigationAbortedCallback()
- onNavigationCancelledCallback()
- onNavigationFeedbackCallback()
smacc2::client_core _components::CpActionClient < ActionType >
+ CpActionClient()
+ CpActionClient()
+ ~CpActionClient()
+ sendGoal()
+ cancelGoal()
+ isServerReady()
+ waitForServer()
+ onInitialize()
+ onComponentInitialization()
+ onSucceeded()
+ onAborted()
+ onCancelled()
+ onFeedback()
+ getActionClient()
+ onFeedback()
+ onResult()
- postResultEvent()
connection
millisecondls
bool
ResultCode
cl_nav2z::NavigateNextWaypoint Options
smacc2::client_behavior _bases::CbActionClientBehavior Base< TAction >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAborted()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAborted()
- dispatchActionFeedback()
cl_nav2z::ClPlugWaypointNavigator
+ ClPlugWaypointNavigator()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ sendNextGoal()
+ stopMovingResult()
- onNavigationResult()
- onGoalReached()
- onGoalCancelled()
- onGoalAborted()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::NavigateToPose >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAborted()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAborted()
- dispatchActionFeedback()
nav2_msgs::action ::NavigateToPose
cl_nav2z::ClNav2ZClientBehaviorBase
+ ~ClNav2ZClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAborted()
# onActionSuccess()
# onActionAborted()
cl_nav2z::ClNavigateNext Waypoint
+ ClNavigateNextWaypoint()
+ ~ClNavigateNextWaypoint()
+ onEntry()
+ onExit()
ONce2Z *
function< void()>
WaypointEventDispatcher
+ initialize()
+ postWaypointEvent()
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
cl_nav2z::ClNav2Z
+ ClNav2Z()
+ ~ClNav2Z()
+ onComponentInitialization()
smacc2::SmaccSignal < void() >
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename rclcpp ::GoalHandle ::SharedPtr > >
optional< std::shared _future< typename rclcpp ::action::ClientGoalHandle ::SharedPtr > >
+ CancelResponse::SharedPtr > >
FeedbackCallback
#eventLogPub
#stateMachinePub
#stateMachineStatusPub
#transitionHistory Service
#transitionLogPub
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string(), boost ::any > > >
vector< smacc2::msgs ::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
string
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getStateName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
boost::signals2::signal < Signature, optional _last_value = typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity +1, Signature > >
boost::signals2::signal < void(), optional_last _value = typename boost::function _traits< void() >::result_type >, int, std ::less< int >, function< void() >, typename extended _signature< function_traits< void() >::arity +1, void(), boost::signals2::mutex > >
smacc2::SmaccSignal < void() >
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename rclcpp ::GoalHandle ::SharedPtr > >
optional< std::shared _future< typename rclcpp ::action::ClientGoalHandle ::SharedPtr > >
+ CancelResponse::SharedPtr > >
FeedbackCallback
vector< std::string >
WaypointEventDispatcher
+ initialize()
+ postWaypointEvent()
long
vector< geometry_msgs ::msg::Pose >
cl_nav2z::ClPlugWaypointNavigatorBase
+ ClPlugWaypointNavigatorBase()
+ ~ClPlugWaypointNavigatorBase()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ loadWaypointsFromFile()
+ loadWaypointsFromFile2()
+ setWaypoints()
+ setWaypoints()
+ getWaypoints()
+ getWaypointNames()
+ getNamedPose()
+ getPose()
+ getCurrentPose()
+ getCurrentWaypointIndex()
+ getCurrentWaypointName()
+ rewind()
+ forward()
+ seekName()
+ loadWaypointsFromYamlParameter()
+ notifyGoalReached()
# insertWaypoint()
# removeWaypoint()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIsNotFinished()
cl_nav2z::components ::ClNav2ActionInterface
+ ClNav2ActionInterface()
+ ~ClNav2ActionInterface()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCancelled()
+ onNavigationFeedback()
- onNavigationSuccessCallback()
- onNavigationAbortedCallback()
- onNavigationCancelledCallback()
- onNavigationFeedbackCallback()
smacc2::client_core _components::CpActionClient < ActionType >
+ CpActionClient()
+ CpActionClient()
+ ~CpActionClient()
+ sendGoal()
+ cancelGoal()
+ isServerReady()
+ waitForServer()
+ onInitialize()
+ onComponentInitialization()
+ onSucceeded()
+ onAborted()
+ onCancelled()
+ onFeedback()
+ getActionClient()
+ onFeedback()
+ onResult()
- postResultEvent()
connection
millisecondls
bool
ResultCode
cl_nav2z::NavigateNextWaypoint Options
smacc2::client_behavior _bases::CbActionClientBehavior Base< TAction >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAborted()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAborted()
- dispatchActionFeedback()
cl_nav2z::ClPlugWaypointNavigator
+ ClPlugWaypointNavigator()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ sendNextGoal()
+ stopMovingResult()
- onNavigationResult()
- onGoalReached()
- onGoalCancelled()
- onGoalAborted()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::NavigateToPose >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAborted()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAborted()
- dispatchActionFeedback()
nav2_msgs::action ::NavigateToPose
cl_nav2z::ClNav2ZClientBehaviorBase
+ ~ClNav2ZClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAborted()
# onActionSuccess()
# onActionAborted()
cl_nav2z::ClNavigateNext Waypoint
+ ClNavigateNextWaypoint()
+ ~ClNavigateNextWaypoint()
+ onEntry()
+ onExit()
ONce2Z *
function< void()>
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
cl_nav2z::ClNav2Z
+ ClNav2Z()
+ ~ClNav2Z()
+ onComponentInitialization()
smacc2::SmaccSignal < void() >
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename rclcpp ::GoalHandle ::SharedPtr > >
optional< std::shared _future< typename rclcpp ::action::ClientGoalHandle ::SharedPtr > >
+ CancelResponse::SharedPtr > >
FeedbackCallback
#eventLogPub
#stateMachinePub
#stateMachineStatusPub
#transitionHistory Service
#transitionLogPub
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string(), boost ::any > > >
vector< smacc2::msgs ::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
string
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getStateName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
boost::signals2::signal < Signature, optional _last_value = typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity +1, Signature > >
boost::signals2::signal < void(), optional_last _value = typename boost::function _traits< void() >::result_type >, int, std ::less< int >, function< void() >, typename extended _signature< function_traits< void() >::arity +1, void(), boost::signals2::mutex > >
smacc2::SmaccSignal < void() >
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename rclcpp ::GoalHandle ::SharedPtr > >
optional< std::shared _future< typename rclcpp ::action::ClientGoalHandle ::SharedPtr > >
+ CancelResponse::SharedPtr > >
FeedbackCallback
vector< std::string >
WaypointEventDispatcher
+ initialize()
+ postWaypointEvent()
long
vector< geometry_msgs ::msg::Pose >
cl_nav2z::ClPlugWaypointNavigatorBase
+ ClPlugWaypointNavigatorBase()
+ ~ClPlugWaypointNavigatorBase()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ loadWaypointsFromFile()
+ loadWaypointsFromFile2()
+ setWaypoints()
+ setWaypoints()
+ getWaypoints()
+ getWaypointNames()
+ getNamedPose()
+ getPose()
+ getCurrentPose()
+ getCurrentWaypointIndex()
+ getCurrentWaypointName()
+ rewind()
+ forward()
+ seekName()
+ loadWaypointsFromYamlParameter()
+ notifyGoalReached()
# insertWaypoint()
# removeWaypoint()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIsNotFinished()
cl_nav2z::components ::ClNav2ActionInterface
+ ClNav2ActionInterface()
+ ~ClNav2ActionInterface()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCancelled()
+ onNavigationFeedback()
- onNavigationSuccessCallback()
- onNavigationAbortedCallback()
- onNavigationCancelledCallback()
- onNavigationFeedbackCallback()
smacc2::client_core _components::CpActionClient < ActionType >
+ CpActionClient()
+ CpActionClient()
+ ~CpActionClient()
+ sendGoal()
+ cancelGoal()
+ isServerReady()
+ waitForServer()
+ onInitialize()
+ onComponentInitialization()
+ onSucceeded()
+ onAborted()
+ onCancelled()
+ onFeedback()
+ getActionClient()
+ onFeedback()
+ onResult()
- postResultEvent()
connection
millisecondls
bool
ResultCode
cl_nav2z::NavigateNextWaypoint Options
smacc2::client_behavior _bases::CbActionClientBehavior Base< TAction >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAborted()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAborted()
- dispatchActionFeedback()
cl_nav2z::ClPlugWaypointNavigator
+ ClPlugWaypointNavigator()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ sendNextGoal()
+ stopMovingResult()
- onNavigationResult()
- onGoalReached()
- onGoalCancelled()
- onGoalAborted()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::NavigateToPose >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAborted()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAborted()
- dispatchActionFeedback()
nav2_msgs::action ::NavigateToPose
cl_nav2z::ClNav2ZClientBehaviorBase
+ ~ClNav2ZClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAborted()
# onActionSuccess()
# onActionAborted()
cl_nav2z::ClNavigateNext Waypoint
+ ClNavigateNextWaypoint()
+ ~ClNavigateNextWaypoint()
+ onEntry()
+ onExit()
ONce2Z *
function< void()>
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
cl_nav2z::ClNav2Z
+ ClNav2Z()
+ ~ClNav2Z()
+ onComponentInitialization()
smacc2::SmaccSignal < void() >
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename rclcpp ::GoalHandle ::SharedPtr > >
optional< std::shared _future< typename rclcpp ::action::ClientGoalHandle ::SharedPtr > >
+ CancelResponse::SharedPtr > >
FeedbackCallback
#eventLogPub
#stateMachinePub
#stateMachineStatusPub
#transitionHistory Service
#transitionLogPub
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string(), boost ::any > > >
vector< smacc2::msgs ::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
string
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getStateName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
boost::signals2::signal < Signature, optional _last_value = typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity +1, Signature > >
boost::signals2::signal < void(), optional_last _value = typename boost::function _traits< void() >::result_type >, int, std ::less< int >, function< void() >, typename extended _signature< function_traits< void() >::arity +1, void(), boost::signals2::mutex > >
smacc2::SmaccSignal < void() >
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename rclcpp ::GoalHandle ::SharedPtr > >
optional< std::shared _future< typename rclcpp ::action::ClientGoalHandle ::SharedPtr > >
+ CancelResponse::SharedPtr > >
FeedbackCallback
vector< std::string >
WaypointEventDispatcher
+ initialize()
+ postWaypointEvent()
long
vector< geometry_msgs ::msg::Pose >
cl_nav2z::ClPlugWaypointNavigatorBase
+ ClPlugWaypointNavigatorBase()
+ ~ClPlugWaypointNavigatorBase()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ loadWaypointsFromFile()
+ loadWaypointsFromFile2()
+ setWaypoints()
+ setWaypoints()
+ getWaypoints()
+ getWaypointNames()
+ getNamedPose()
+ getPose()
+ getCurrentPose()
+ getCurrentWaypointIndex()
+ getCurrentWaypointName()
+ rewind()
+ forward()
+ seekName()
+ loadWaypointsFromYamlParameter()
+ notifyGoalReached()
# insertWaypoint()
# removeWaypoint()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIsNotFinished()
cl_nav2z::components ::ClNav2ActionInterface
+ ClNav2ActionInterface()
+ ~ClNav2ActionInterface()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()