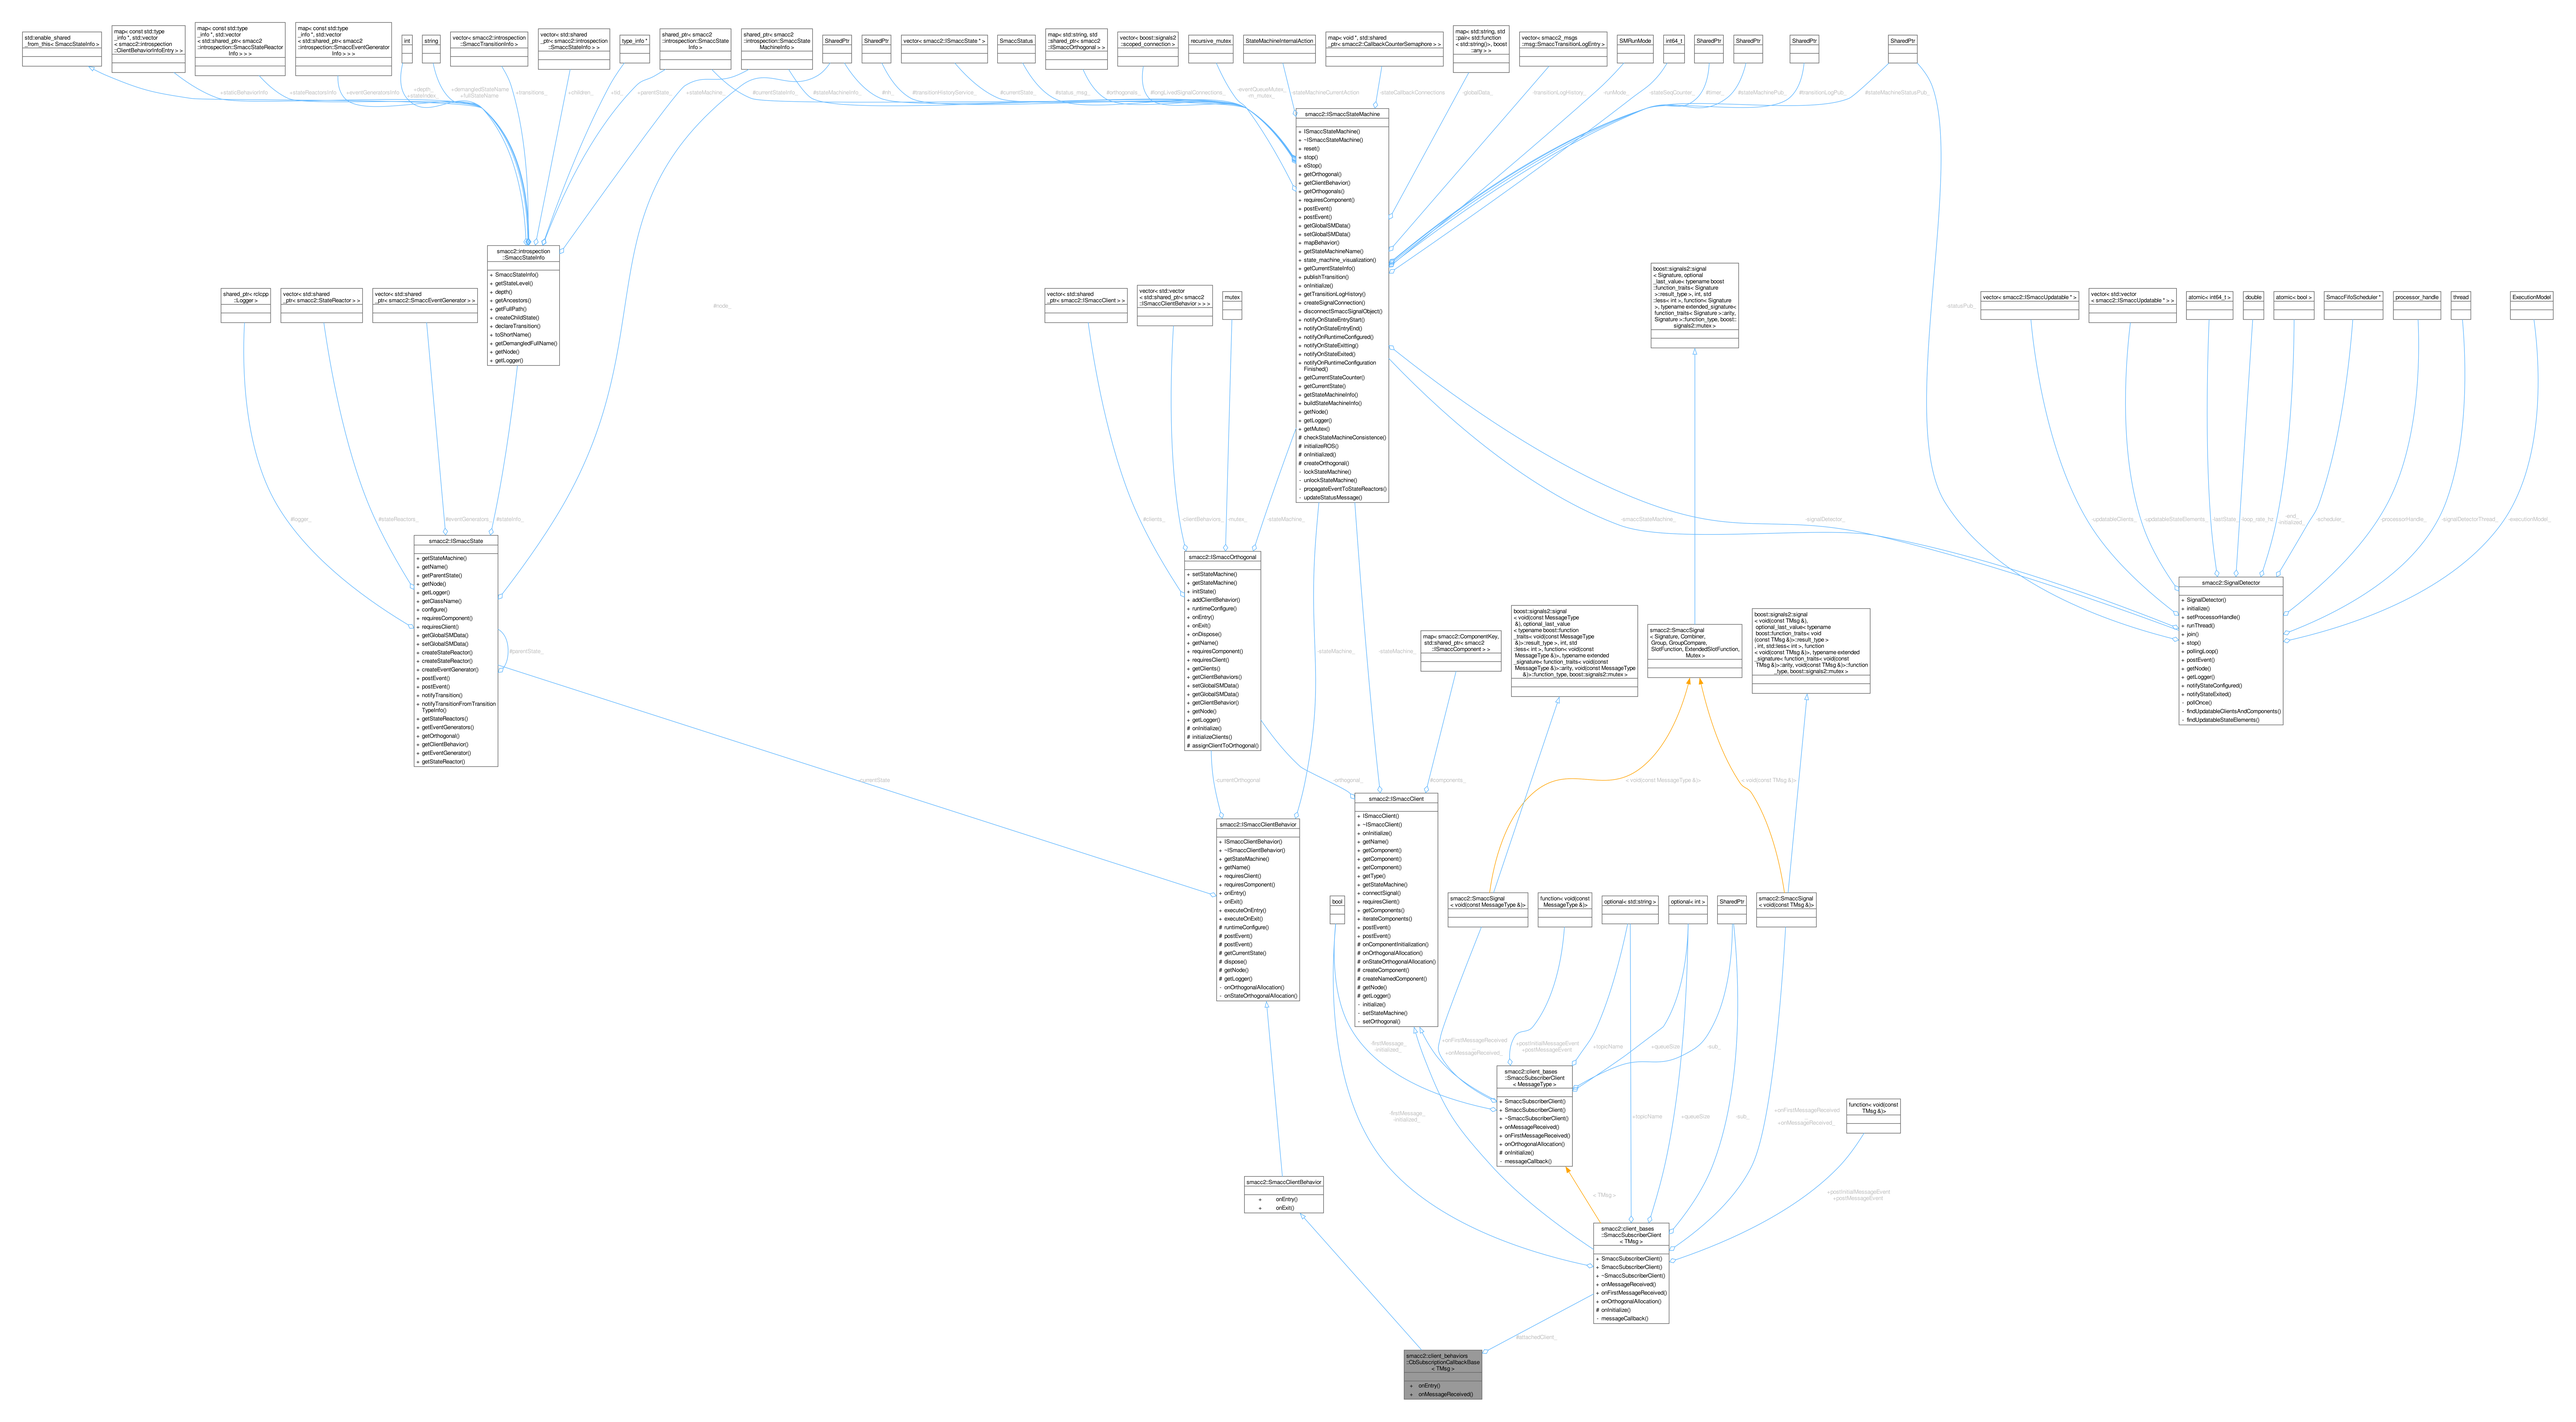

std::enable_shared
_from_this< SmaccStateInfo >
map< const std::type
_info *, std::vector
< smacc2::introspection
::ClientBehaviorInfoEntry > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccStateReactor
Info > > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccEventGenerator
Info > > >
int
string
vector< smacc2::introspection
::SmaccTransitionInfo >
vector< std::shared
_ptr< smacc2::introspection
::SmaccStateInfo > >
type_info *
shared_ptr< smacc2
::introspection::SmaccState
Info >
shared_ptr< smacc2
::introspection::SmaccState
MachineInfo >
SharedPtr
SharedPtr
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
vector< boost::signals2
::scoped_connection >
recursive_mutex
StateMachineInternalAction
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std
::pair< std::function
< std::string()>, boost
::any > >
vector< smacc2_msgs
::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
SharedPtr
SharedPtr
SharedPtr
+staticBehaviorInfo_
+stateReactorsInfo_
+eventGeneratorsInfo_
+depth_
+stateIndex_
+demangledStateName
+fullStateName
+transitions_
+children_
+id_
+parentState_
+stateMachine_
#currentStateInfo_
#stateMachineInfo_
#m_
#transitionHistoryService_
#currentState_
#status_msg_
#orthogonals_
#longLivedSignalConnections_
-eventQueueMutex_
-m_mutex_
+stateMachineCurrentAction
+stateCallbackConnections
globalData_
+transitionLogHistory_
+runMode_
+stateSeqCounter_
#timer_
#stateMachinePub_
#transitionLogPub_
#stateMachineStatusPub_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getOrthogonals()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ mapBehavior()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
checkStateMachineConsistency()
initializeROS()
onInitialized()
createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::Intrexpection
::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
#node_
shared_ptr< rclcpp
::Logger >
vector< std::shared
_ptr< smacc2::StateReactor > >
vector< std::shared
_ptr< smacc2::SmaccEventGenerator > >
#logger_
#stateReactors_
#eventGenerators_
#stateInfo_
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition
TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#eventState_
+currentState
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
mutex
#clients_
#clientBehaviors_
#mutex_
#stateMachine_
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
onInitialize()
initializeClients()
assignClientToOrthogonal()
currentOrthogonal
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
#components_
boost::signals2::signal
< void(const MessageType
&), optional_last_value
< typename boost::function
_traits< void(const MessageType
&)>::result_type >, int, std
::less< int >, function< void(const
MessageType &)>, typename extended
_signature< function_traits< void(const
MessageType &)>::arity, void(const MessageType
&)>::function_type, boost::signals2::mutex >
boost::signals2::signal
< Signature, optional
_last_value< typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity,
Signature >::function_type, boost::
signals2::mutex >
smacc2::SmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(const TMsg &),
optional_last_value< typename
boost::function_traits< void
(const TMsg &)>::result_type >
, int, std::less< int >, function
< void(const TMsg &)>, typename extended
_signature< function_traits< void(const
TMsg &)>::arity, void(const TMsg &)>::function
_type, boost::signals2::mutex >
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
+ runtimeConfigure()
postEvent()
postEvent()
getCurrentState()
dispose()
getNode()
getLogger()
- onOrthogonalAllocation()
- onStateOrthogonalAllocation()
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
onComponentInitialization()
onOrthogonalAllocation()
onStateOrthogonalAllocation()
createComponent()
createNamedComponent()
getNode()
getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
#stateMachine_
#orthogonal_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
#signalDetector_
vector< smacc2::ISmaccUpdatable * >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
atomic< int64_t >
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutorMode
#updatableClients_
#updatableStateElements_
#lastState_
#loop_rate_hz_
#end_
initialized_
#scheduler_
#processorHandle_
#signalDetectorThread_
#executionMode_
smacc2::client_bases
::SmaccSubscriberClient
< MessageType >
+ SmaccSubscriberClient()
+ SmaccSubscriberClient()
+ ~SmaccSubscriberClient()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onOrthogonalAllocation()
onInitialize()
messageCallback()
smacc2::SmaccSignal
< void(const MessageType &)>
function< void(const
MessageType &)>
optional< std::string >
optional< int >
SharedPtr
smacc2::SmaccSignal
< void(const TMsg &)>
bool
+onFirstMessageReceived_
+onMessageReceived_
#firstMessage_
#initialized_
+postInitialMessageEvent
+postMessageEvent
+topicName
+queueSize
+sub_
function< void(const
TMsg &)>
smacc2::SmaccClientBehavior
+ onEntry()
+ onExit()
smacc2::client_bases
::SmaccSubscriberClient
< TMsg >
+ SmaccSubscriberClient()
+ SmaccSubscriberClient()
+ ~SmaccSubscriberClient()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onOrthogonalAllocation()
onInitialize()
- messageCallback()
#attachedClient_
smacc2::client_behaviors
::CbSubscriptionCallbackBase
< TMsg >
+ onEntry()
+ onMessageReceived()