


cl_nav2z::CbNav2ZClientBehavior
Base::cancelGoal

cl_nav2z::CbAbortNavigation
::onEntry

cl_nav2z::components
::CpNav2ActionInterface
::cancelNavigation

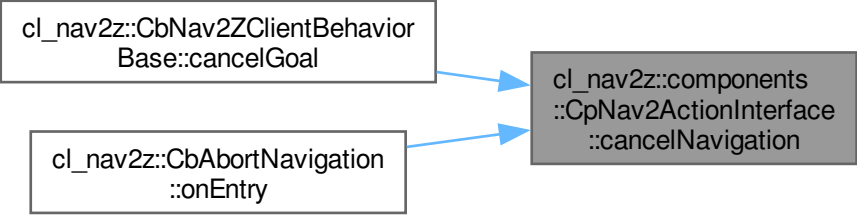

```
graph LR; A["cl_nav2z::CbNav2ZClientBehavior  
Base::cancelGoal"] --> C["cl_nav2z::components  
::CpNav2ActionInterface  
::cancelNavigation"]; B["cl_nav2z::CbAbortNavigation  
::onEntry"] --> C;
```

The diagram illustrates two function calls on the left pointing to a common target on the right. The top call is `cl_nav2z::CbNav2ZClientBehavior::cancelGoal` and the bottom call is `cl_nav2z::CbAbortNavigation::onEntry`. Both point to the `cancelNavigation` method of the `CpNav2ActionInterface` component within the `cl_nav2z::components` namespace.