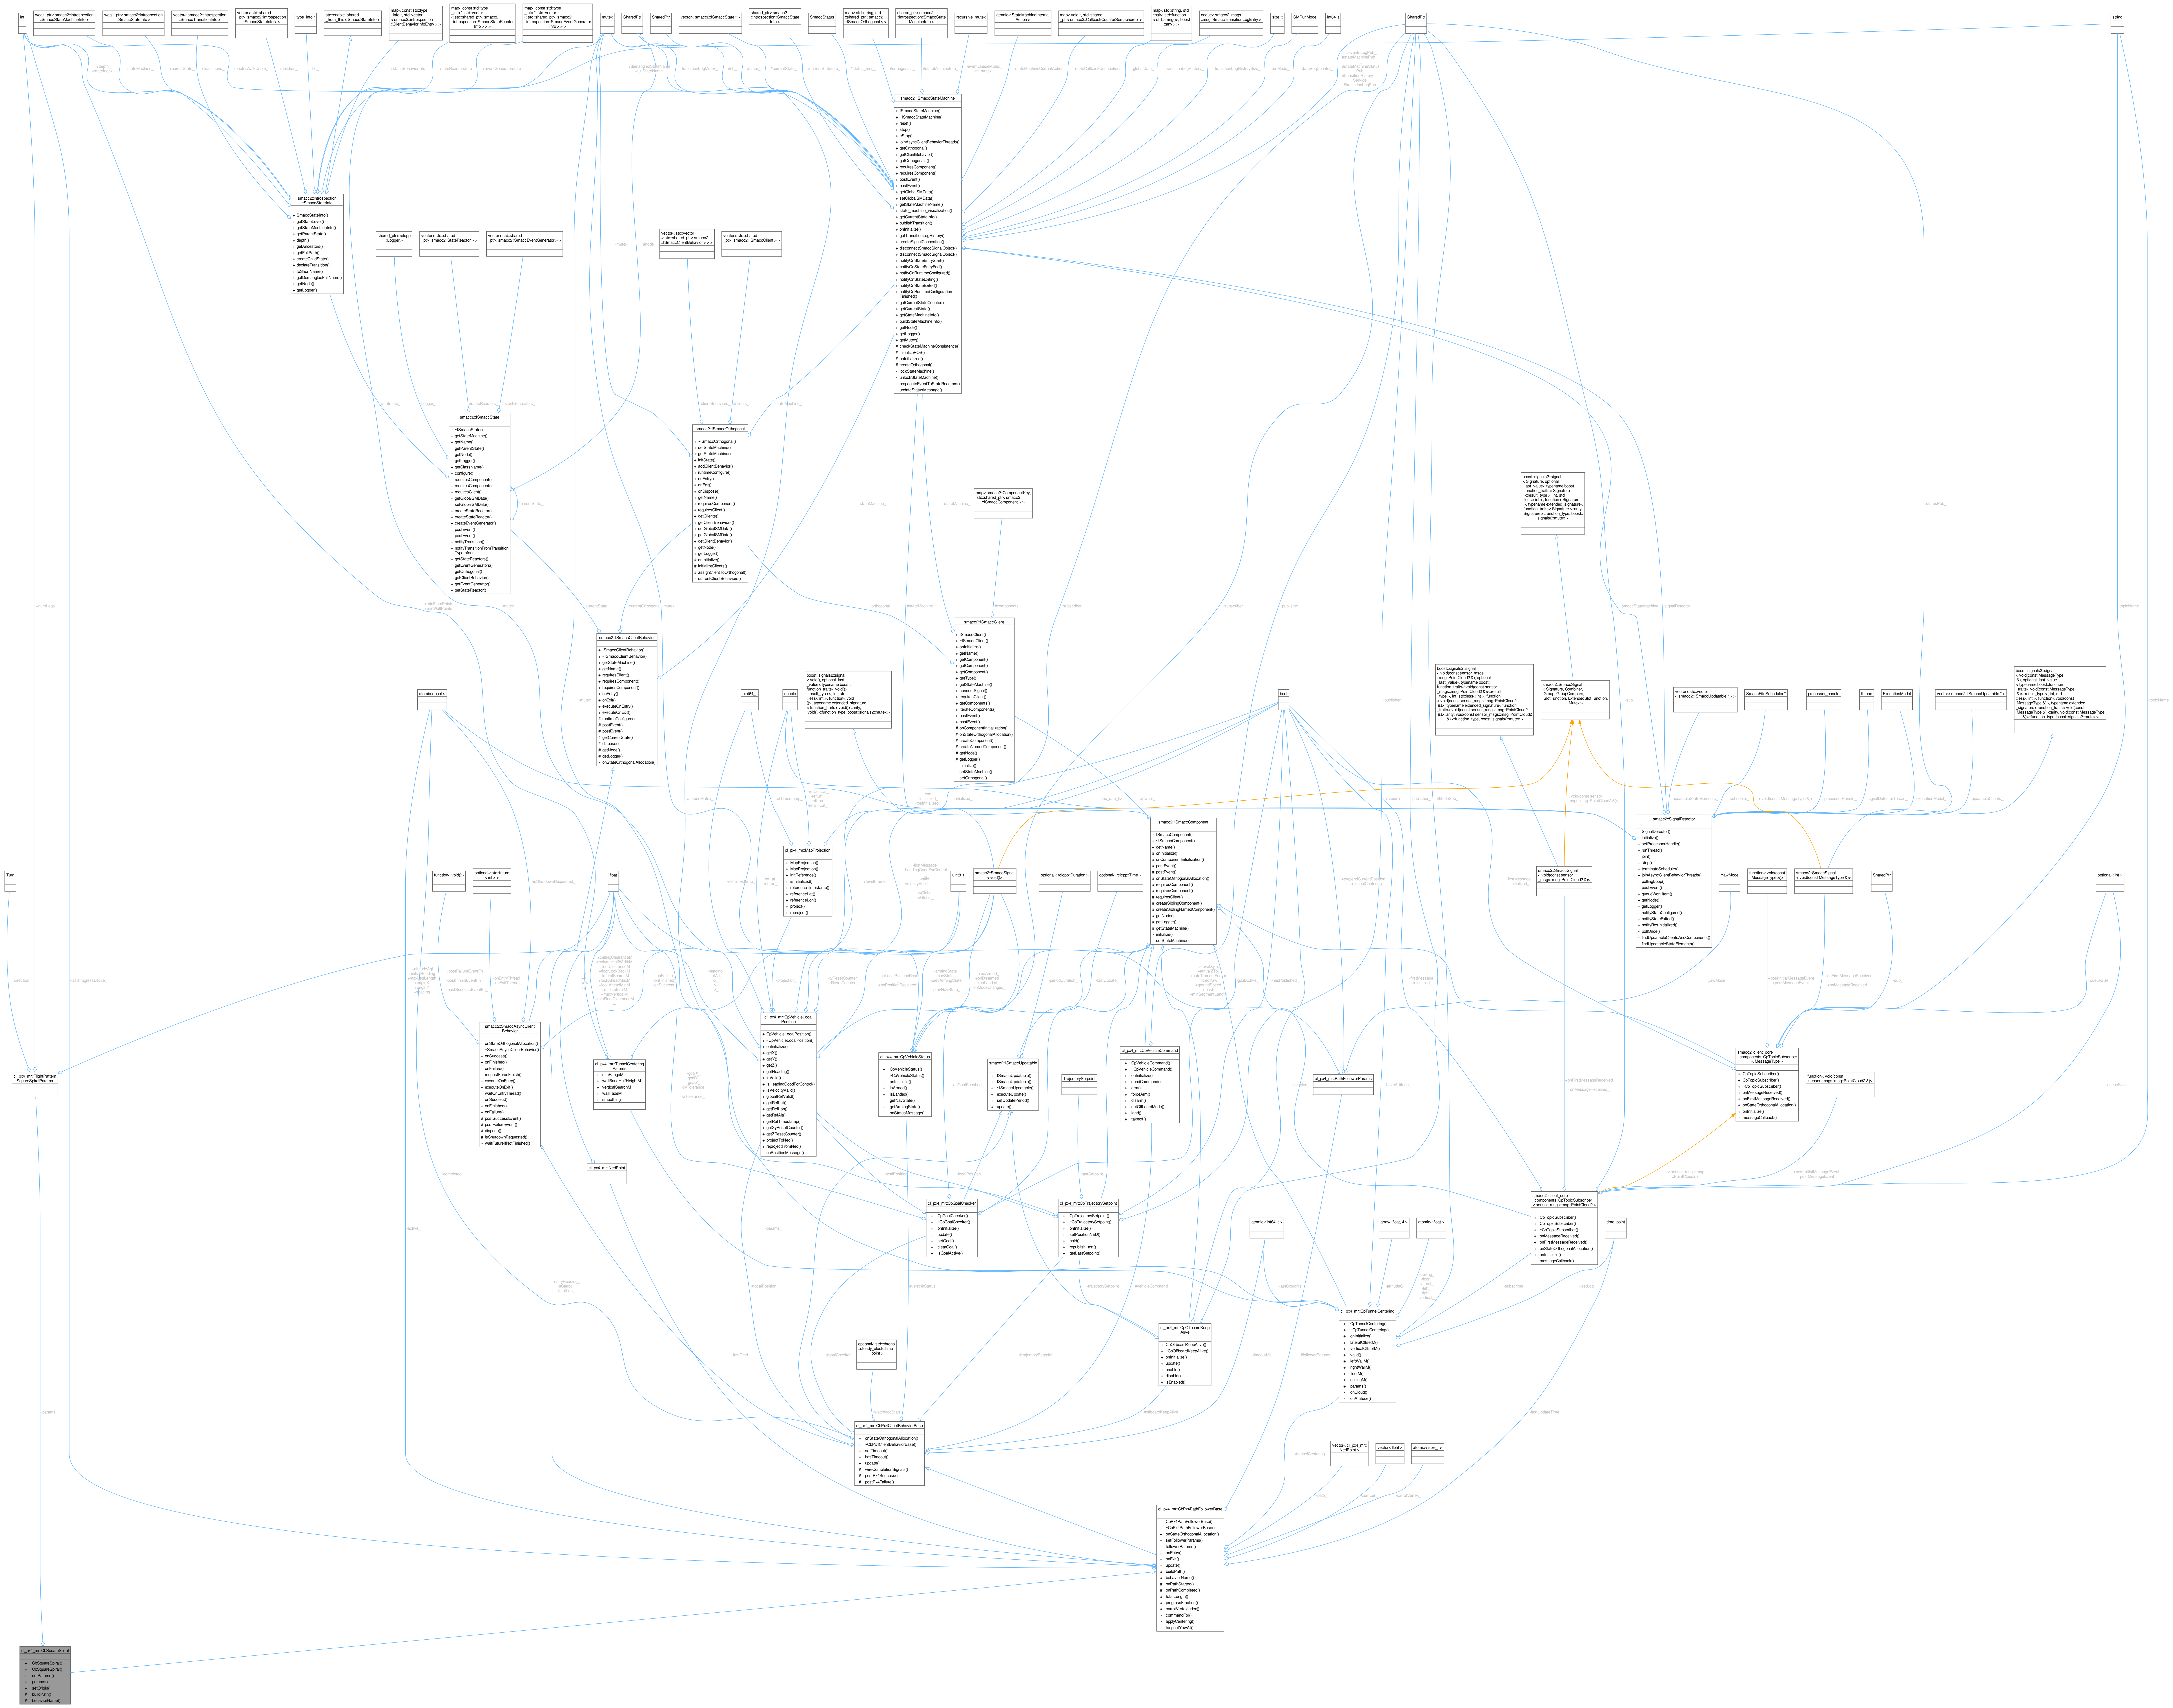
cl_px4_mr::CbSquareSpiral
+ CbSquareSpiral()
+ CbSquareSpiral()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
cl_px4_mr::FlightPattern SquareSpiralParams
Turn
+direction
-lastProgressDecile_
+altitudeAgl +initialHeading +maxLegLength +originX +originY +spacing
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr:: NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
#tunnelCentering_
#followerParams_
-lastUpdateTime_
-entryHeading_ -sCarrot_ -totalLen_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
optional< std::chrono ::steady_clock::time _point >
-watchdogStart_
#localPosition_
#vehicleStatus_
#goalChecker_
#trajectorySetpoint_
#vehicleCommand_
#offboardKeepAlive_
-lastCmd_
-params_
cl_px4_mr::NedPoint
cl_px4_mr::TunnelCentering Params
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
+ceilingClearanceM +columnHalfWidthM +floorClearanceM +floorLookBackM +lateralSearchM +lookAheadMaxM +lookAheadMinM +maxLateralM +maxVerticalM +minFloorClearanceM
float
+x +y +yaw +z
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
function< void()>
optional< std::future < int > >
-postFailureEventFn -postFinishEventFn -postSuccessEventFn_
-onEntryThread_ -onExitThread_
-isShutdownRequested_
-onFailure_ -onFinished_ -onSuccess_
-completed_
-active_
atomic< bool >
+minFloorPoints +minWallPoints
cl_px4_mr::CpVehicleLocal Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
-heading_ -refAlt_ -x_ -y_ -z_
-projection_
-xyResetCounter_ -zResetCounter_
+onLocalPositionReset +onPositionReceived
-firstMessage_ -headingGoodForControl -valid_ -velocityValid -xyGlobal_ -zGlobal_
+levelFrame
-attitudeMutex_
cl_px4_mr::MapProjection
+ MapProjection()
+ MapProjection()
+ initReference()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
uint64_t
double
-refTimestamp_
-refCosLat_ -refLat_ -refLon_ -refSinLat_
-refLat_ -refLon_
boost::signals2::signal < void(), optional_last _value< typename boost:: function_traits< void()> ::result_type >, int, std ::less< int >, function< void ()>, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
-armingState_ -navState_ -prevArmingState -prevNavState_
+onArmed_ +onDisarmed_ +onLanded_ +onModeChanged_
uint8_t
smacc2::SmaccSignal < void()>
optional< rclcpp::Duration >
optional< rclcpp::Time >
-periodDuration_
-lastUpdate_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
+onGoalReached_
-goalX_ -goalY_ -goalZ_ -xyTolerance -zTolerance_
-localPosition_
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
TrajectorySetpoint
-lastSetpoint_
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
-trajectorySetpoint_
#vehicleCommand_
cl_px4_mr::CpOffboardKeep Alive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
atomic< int64_t >
-timeoutMs_
-lastCloudNs_
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
array< float, 4 >
atomic< float >
-attitudeQ_
-ceiling_ -floor_ -lateral_ -left_ -right_ -vertical_
-subscriber_
-lastLog_
time_point
smacc2::client_core _components::CpTopicSubscriber < sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
< sensor_msgs::msg ::PointCloud2 >
+postInitialMessageEvent +postMessageEvent
function< void(const sensor_msgs::msg::PointCloud2 &)>
+onFirstMessageReceived +onMessageReceived_
smacc2::SmaccSignal < void(const sensor _msgs::msg::PointCloud2 &)>
< void(const sensor _msgs::msg::PointCloud2 &)>
boost::signals2::signal < void(const sensor_msgs ::msg::PointCloud2 &), optional _last_value< typename boost:: function_traits< void(const sensor _msgs::msg::PointCloud2 &)>::result _type >, int, std::less< int >, function < void(const sensor_msgs::msg::PointCloud2 &)>, typename extended_signature< function _traits< void(const sensor_msgs::msg::PointCloud2 &)>::arity, void(const sensor_msgs::msg::PointCloud2 &)>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal < Signature, optional _last_value< typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost:: signals2::mutex >
< void()>
< void(const MessageType &)>
smacc2::client_core _components::CpTopicSubscriber < MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
function< void(const MessageType &)>
smacc2::SmaccSignal < void(const MessageType &)>
SharedPtr
YawMode
optional< int >
+yawMode
+postInitialMessageEvent +postMessageEvent
+onFirstMessageReceived +onMessageReceived_
-sub_
+queueSize
-topicName_
boost::signals2::signal < void(const MessageType &), optional_last_value < typename boost::function _traits< void(const MessageType &)>::result_type >, int, std ::less< int >, function< void(const MessageType &)>, typename extended _signature< function_traits< void(const MessageType &)>::arity, void(const MessageType &)>::function_type, boost::signals2::mutex >
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
vector< std::vector < smacc2::ISmaccUpdatable * > >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
-updatableStateElements_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-smaccStateMachine_
-signalDetector_
cl_px4_mr::PathFollowerParams
+arrivalXyTol +arrivalZTol +autoTimeoutFactor +fixedYaw +groundSpeed +leash +minSegmentLength
+prependCurrentPosition +useTunnelCentering
bool
-goalActive_
-hasPublished_
-enabled_
-haveAttitude_
-loop_rate_hz
#owner_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
-publisher_
-attitudeSub_
-statusPub_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
#components_
-orthogonal_
#stateMachine_
-stateMachine_
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
-currentState
-currentOrthogonal
-mutex_
smacc2::ISmaccOrthogonal
+ ~ISmaccOrthogonal()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
vector< std::shared _ptr< smacc2::ISmaccClient > >
-clientBehaviors_
#clients_
-stateMachine_
-mutex_
#node_
smacc2::ISmaccState
+ ~ISmaccState()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#parentState_
#stateInfo_
#logger_
#stateReactors_
#eventGenerators_
shared_ptr< rclcpp ::Logger >
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
int
weak_ptr< smacc2::introspection ::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection ::SmaccStateInfo >
vector< smacc2::introspection ::SmaccTransitionInfo >
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
type_info *
std::enable_shared _from_this< SmaccStateInfo >
map< const std::type _info *, std::vector < smacc2::introspection ::ClientBehaviorInfoEntry > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccEventGenerator Info > > >
+depth_ +stateIndex_
+stateMachine_
+parentState_
+transitions_
-reactorWalkDepth_
+children_
+tid_
+staticBehaviorInfo
+stateReactorsInfo
+eventGeneratorsInfo
mutex
SharedPtr
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::SmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
shared_ptr< smacc2 ::introspection::SmaccState MachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string()>, boost ::any > >
deque< smacc2_msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
SharedPtr
string
+demangledStateName +fullStateName
-transitionLogMutex_
#nh_
#timer_
#currentState_
#currentStateInfo_
#status_msg_
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_ -m_mutex_
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-stateSeqCounter_
#eventsLogPub_ #stateMachinePub_ #stateMachineStatus Pub_ #transitionHistory Service_ #transitionLogPub_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()