


smacc2::ISmaccOrthogonal
::addClientBehavior

smacc2::ISmaccOrthogonal
::initState

smacc2::ISmaccOrthogonal
::runtimeConfigure

smacc2::ISmaccOrthogonal
::getName

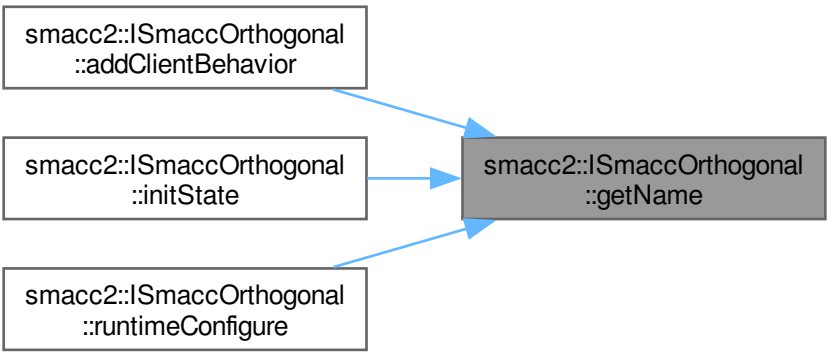

```
graph LR; A["smacc2::ISmaccOrthogonal::addClientBehavior"] --> D["smacc2::ISmaccOrthogonal::getName"]; B["smacc2::ISmaccOrthogonal::initState"] --> D; C["smacc2::ISmaccOrthogonal::runtimeConfigure"] --> D;
```