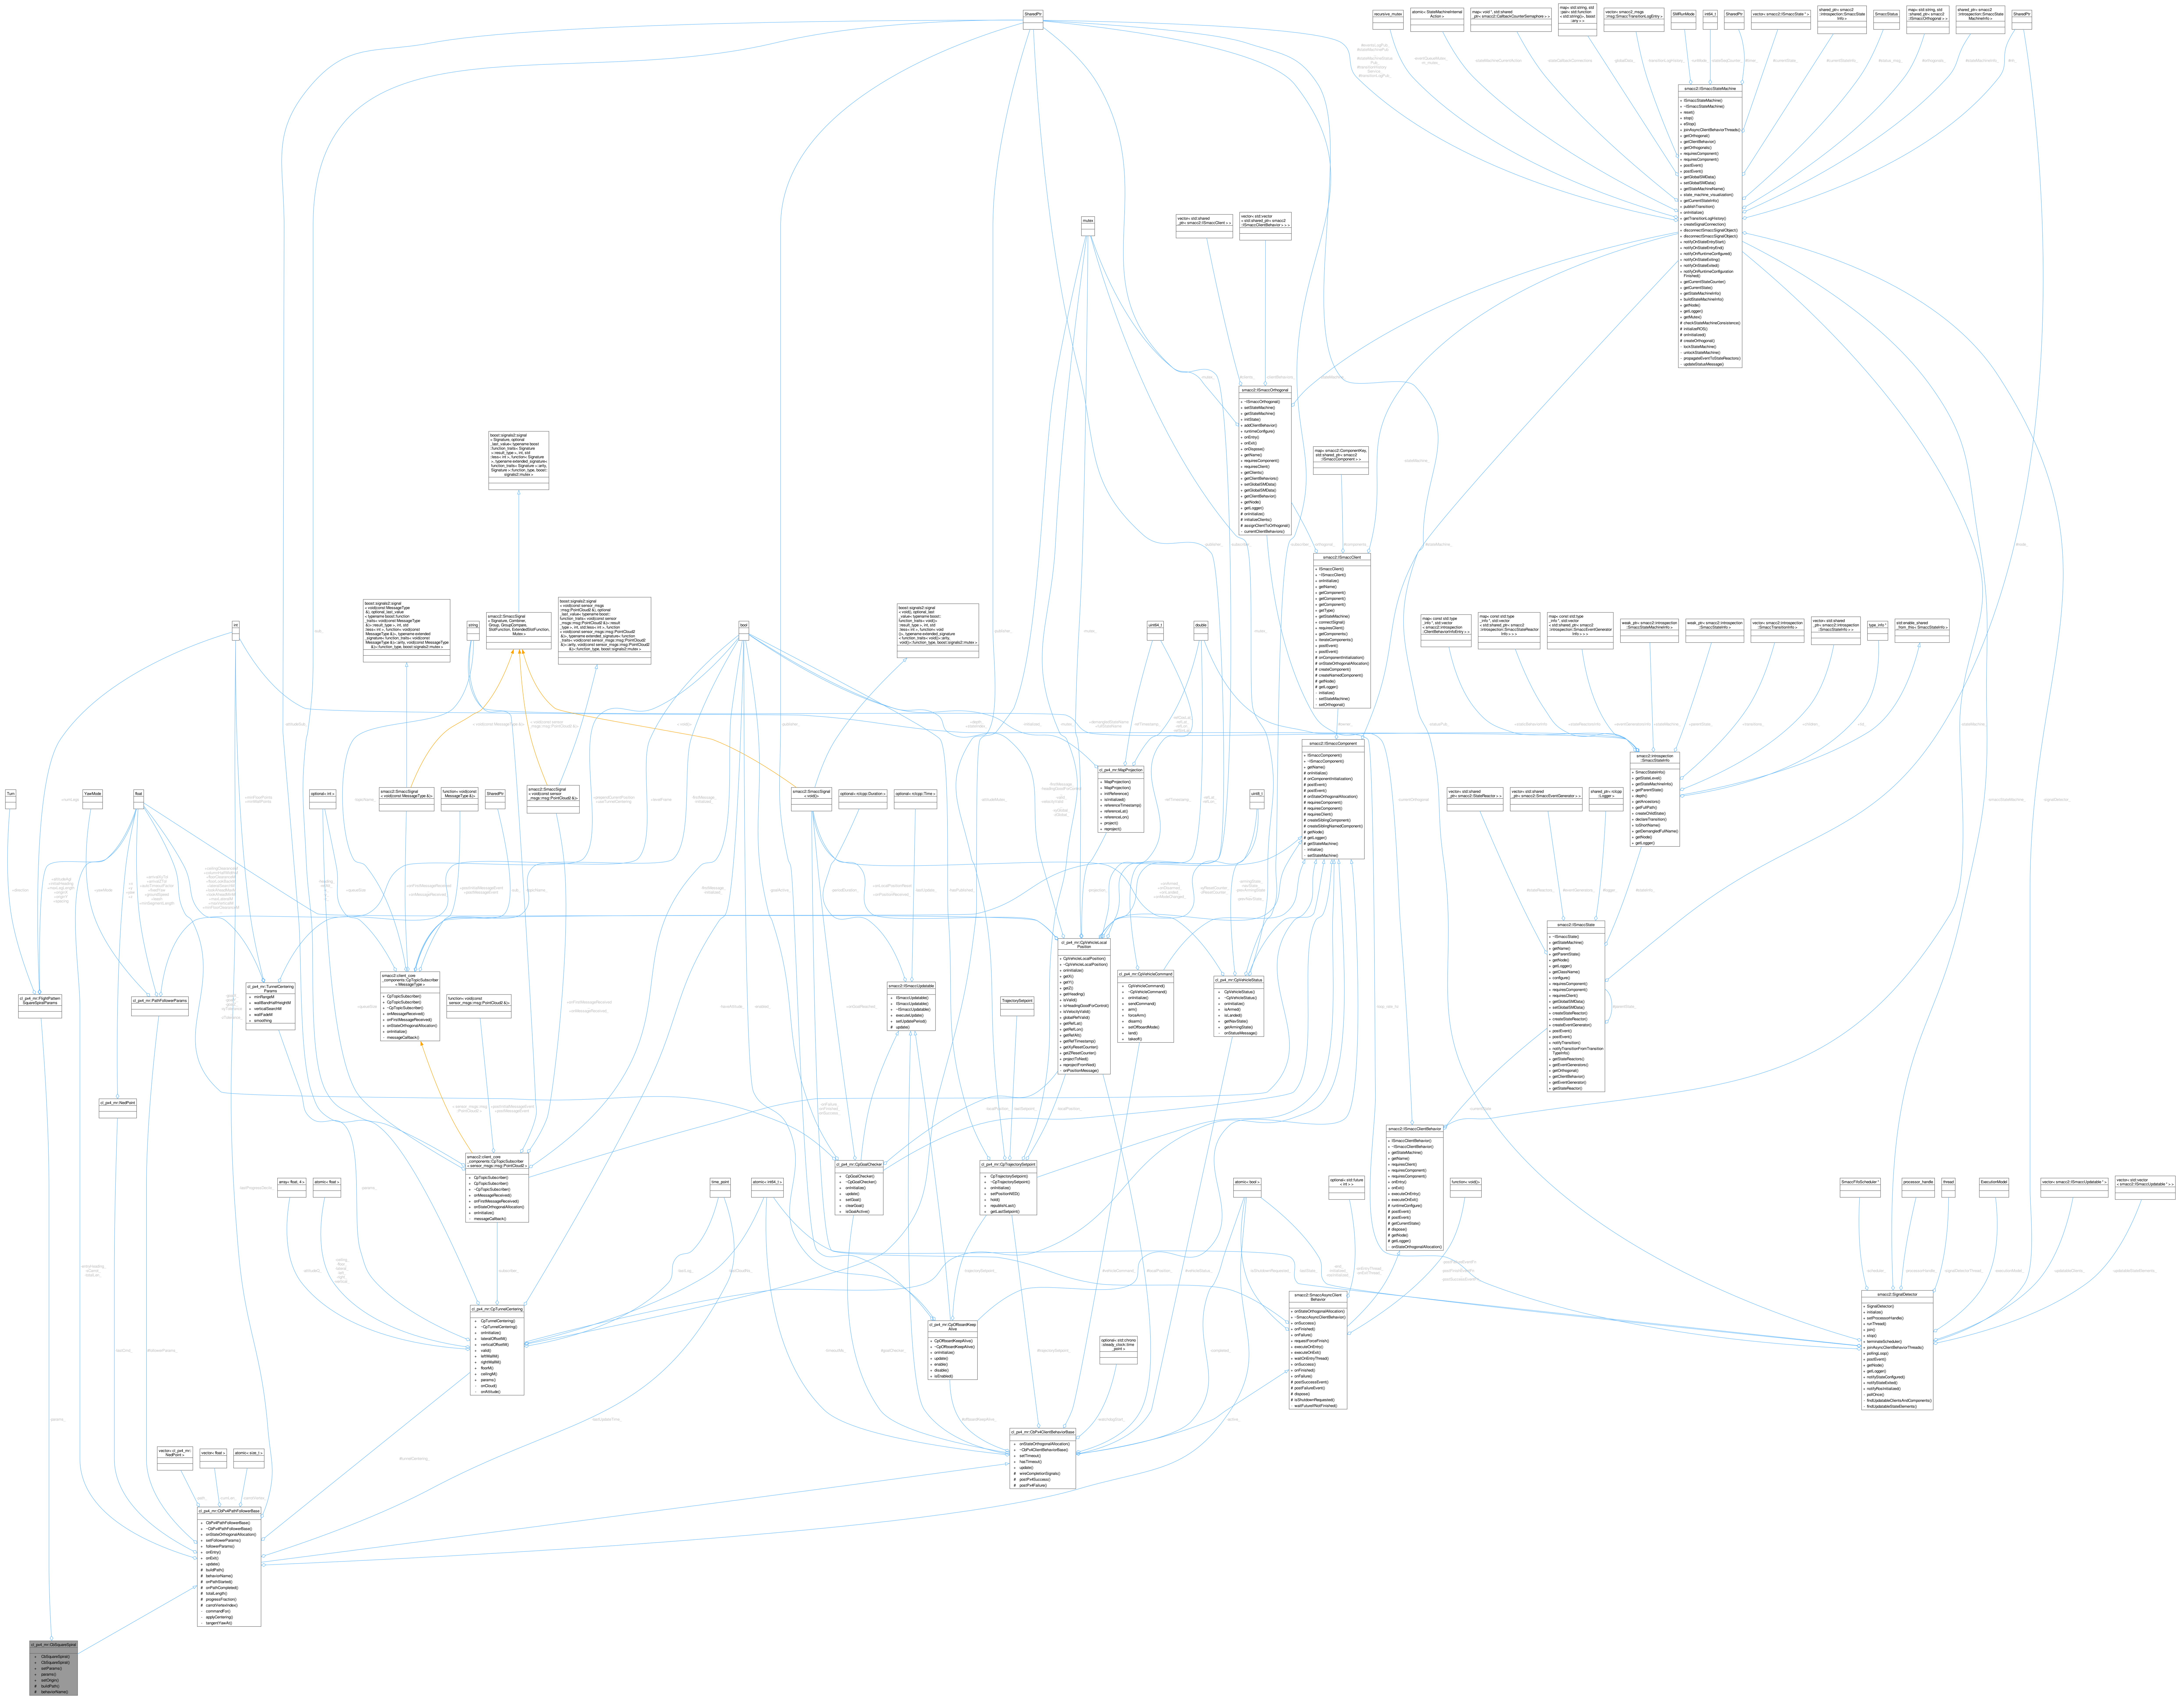
cl_px4_mr::CbSquareSpiral
+ CbSquareSpiral()
+ CbSquareSpiral()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
-params_
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
optional< std::chrono::steady_clock::time_point >
-trajectorySetpoint_
#goalChecker_
#trajectorySetpoint_
#vehicleCommand_
#localPosition_
#vehicleStatus_
#offboardKeepAlive_
-watchdogStart_
-completed_
-active_
-isShutdownRequested_
-lastState_
-end_
-initialized_
-rosInitialized_
-onEntryThread_
-onExitThread_
-postFailureEventFn
-postFinishEventFn
-postSuccessEventFn
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
smacc2::SmaccAsyncClientBehavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()