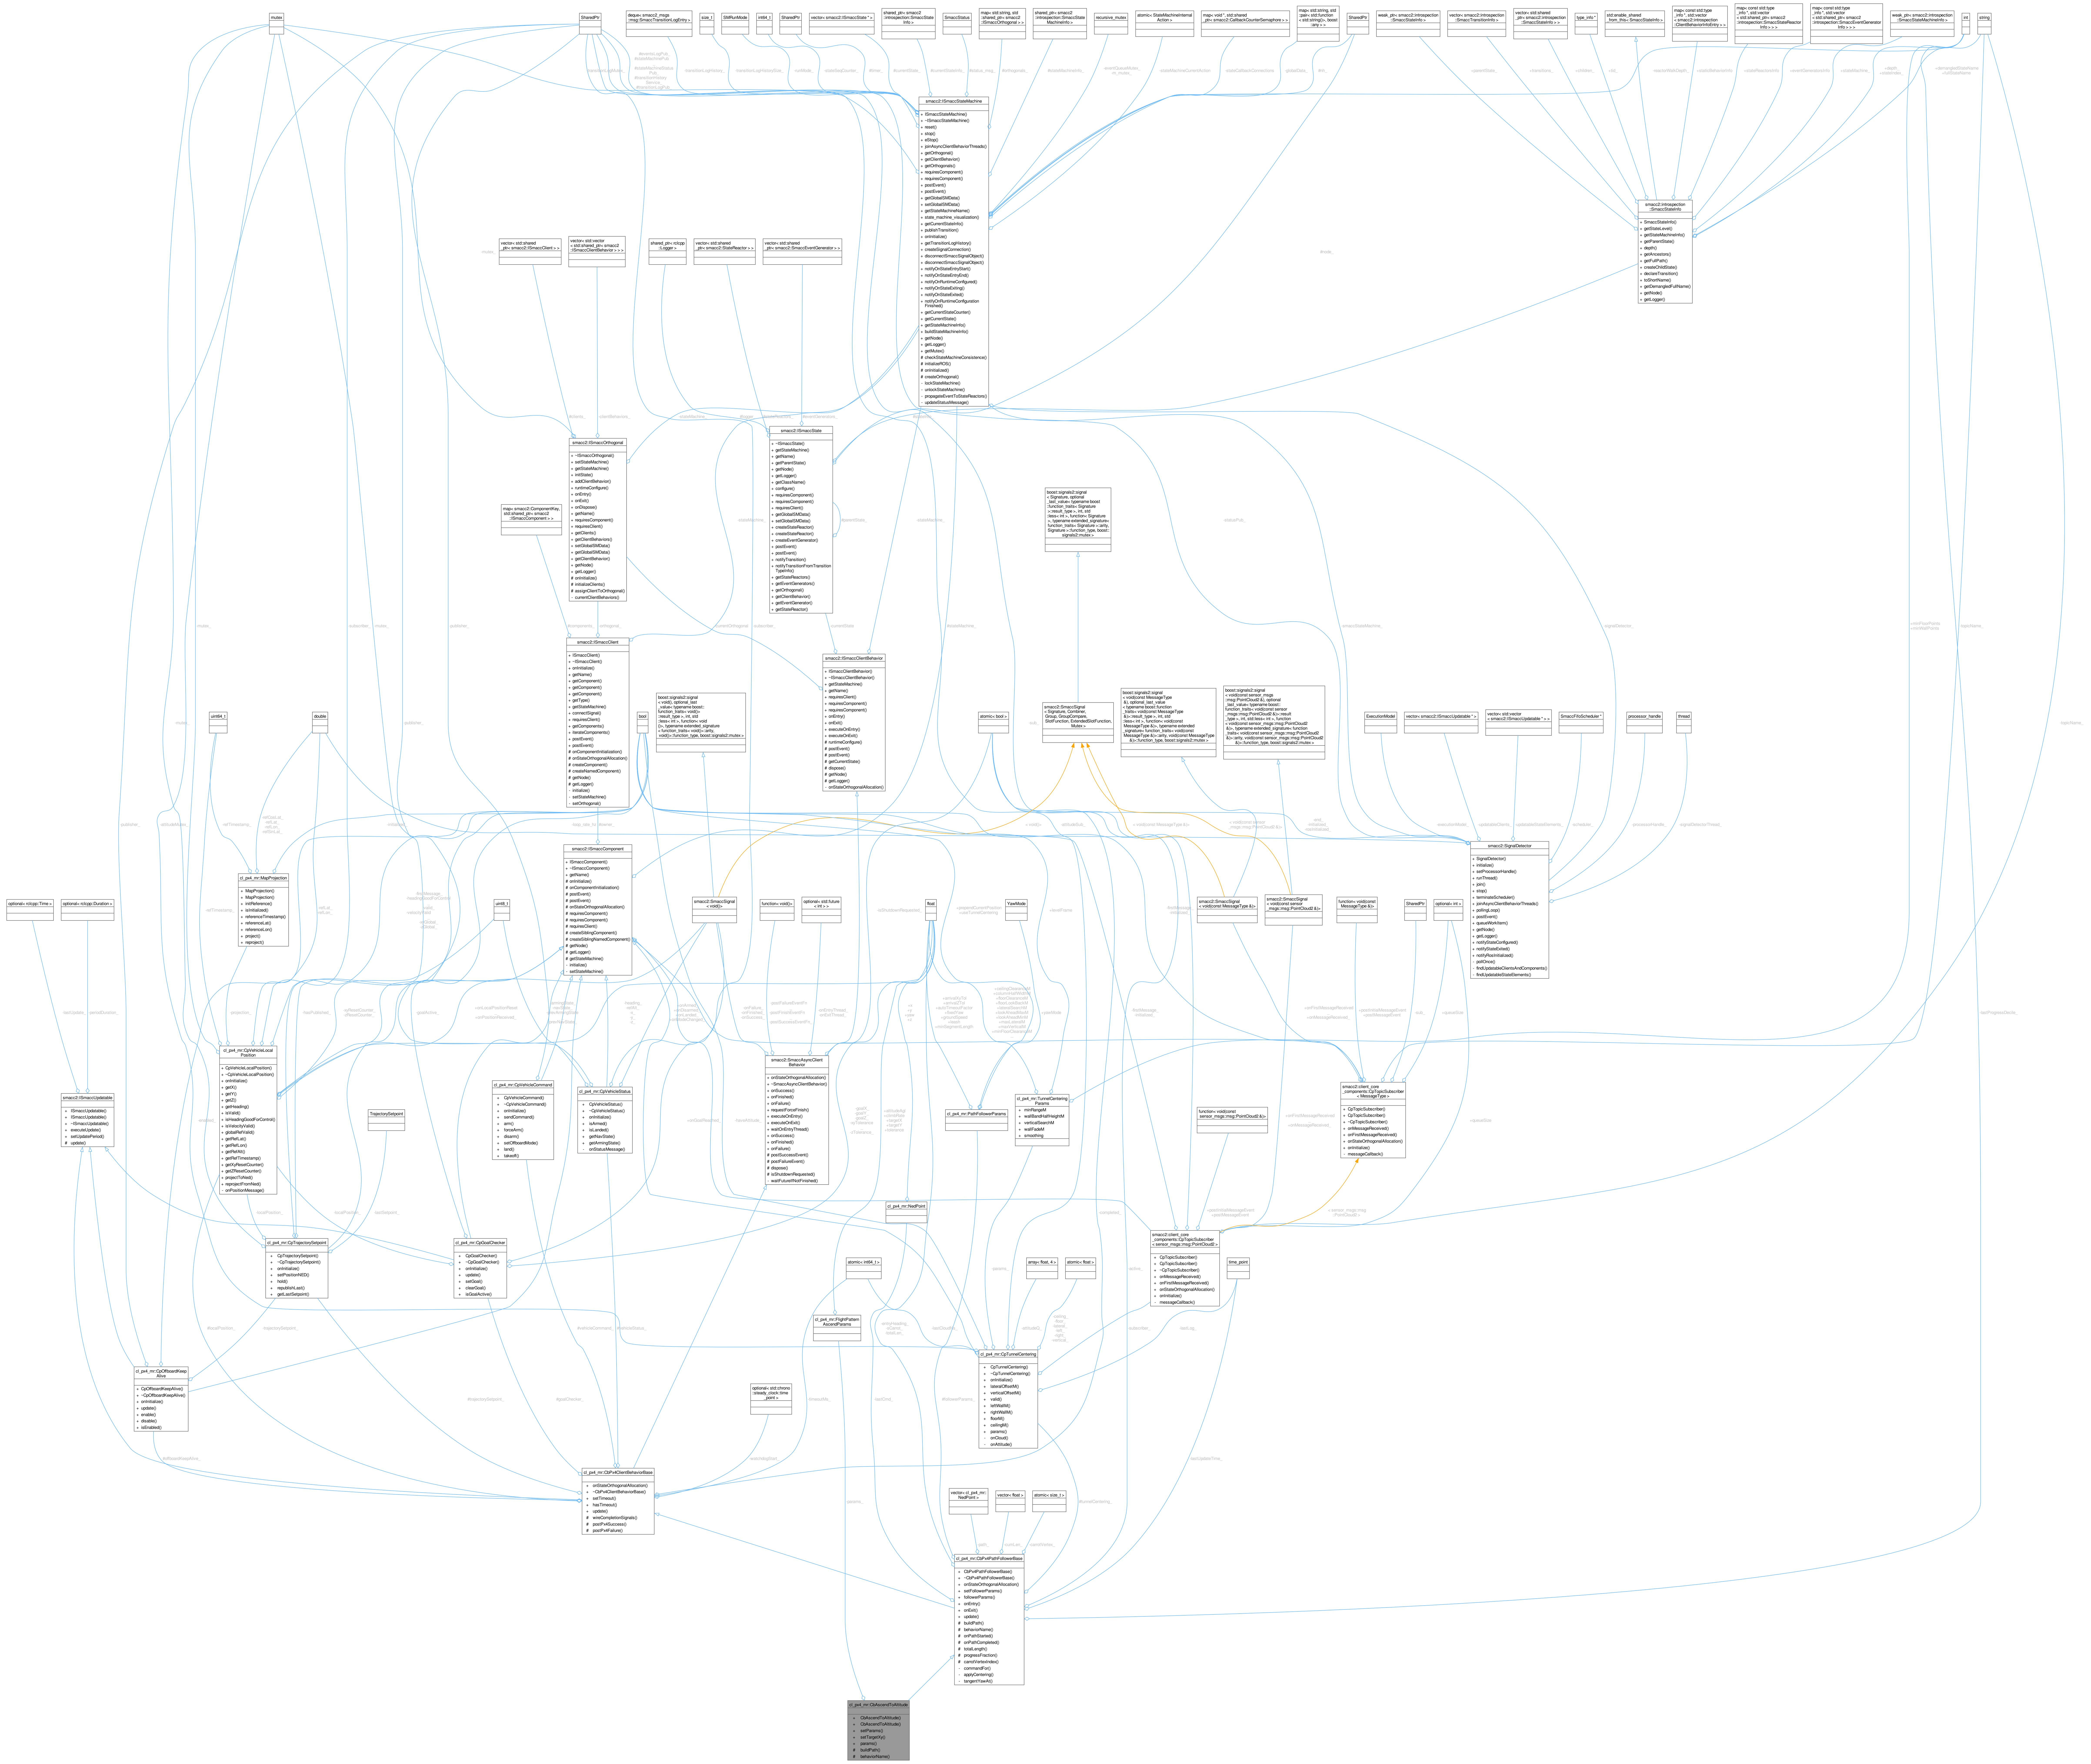

cl_px4_mr::CbAscendToAltitude
+ CbAscendToAltitude()
+ CbAscendToAltitude()
+ setParams()
+ setTargetXy()
+ params()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
#followerParams_
#tunnelCentering_
-params_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#goalChecker_
#trajectorySetpoint_
#localPosition_
#vehicleCommand_
#vehicleStatus_
-timeoutMs_
-watchdogStart_
-lastCmd_
-haveAttitude_
optional< std::chrono::steady_clock::time_point >
smacc2::SmaccAsyncClientBehavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
-onFailure_
-onFinished_
-onSuccess_
-postFailureEventFn
-postFinishEventFn
-postSuccessEventFn_
-onEntryThread_
-onExitThread_
-goalX_
-goalY_
-goalZ_
-xyTolerance
-zTolerance_
+altitudeAgl
+climbRate
+targetX
+targetY
+tolerance
+x
+y
+yaw
+z
+arrivalXyTol
+arrivalZTol
+autoTimeoutFactor
+fixedYaw
+groundSpeed
+leash
+minSegmentLength
+ceilingClearanceM
+columnHalfWidthM
+floorClearanceM
+floorLookBackM
+lateralSearchM
+lookAheadMaxM
+lookAheadMinM
+maxLateralM
+maxVerticalM
+minFloorClearanceM
+yawMode
cl_px4_mr::PathFollowerParams
cl_px4_mr::TunnelCenteringParams
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
cl_px4_mr::NedPoint
cl_px4_mr::FlightPatternAscendParams
atomic< int64_t >
array< float, 4 >
atomic< float >
time_point
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
-entryHeading_
-sCarrot_
-totalLen_
-lastCloudNs_
-attitudeQ_
-ceiling_
-floor_
-lateral_
-left_
-right_
-vertical_
-subscriber_
-lastLog_
-lastUpdateTime_
-completed_
-active_
-firstMessage_
-initialized_
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
< sensor_msgs::msg::PointCloud2 >
+postInitialMessageEvent
+postMessageEvent
+onFirstMessageReceived
+onMessageReceived_
function< void(const sensor_msgs::msg::PointCloud2 &)>
smacc2::client_core_components::CpTopicSubscriber< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
-sub_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
-lastUpdate_
-periodDuration_
cl_px4_mr::CpVehicleLocalPosition
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
-projection_
-hasPublished_
-xyResetCounter_
-zResetCounter_
-goalActive_
-enabled_
+onLocalPositionReset
+onPositionReceived_
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
-armingState_
-navState_
-prevArmingState
-prevNavState_
-heading_
-refAlt_
-x_
-y_
-z_
TrajectorySetpoint
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
-localPosition_
-lastSetpoint_
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
optional< rclcpp::Time >
optional< rclcpp::Duration >
MapProjection
cl_px4_mr::MapProjection
uint64_t
double
bool
uint8_t
float
YawMode
smacc2::ISmaccComponent
smacc2::SmaccSignal< void()>
function< void()>
optional< std::future< int > >
smacc2::ISmaccClient
smacc2::ISmaccClientBehavior
smacc2::ISmaccOrthogonal
smacc2::ISmaccState
smacc2::ISmaccStateMachine
smacc2::introspection::SmaccStateInfo
smacc2::SignalDetector
smacc2::SmaccSignal< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal
smacc2::SmaccSignal< void(const MessageType &)>
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
function< void(const MessageType &)>
atomic< bool >
ExecutionModel
SmaccFifoScheduler *
processor_handle
thread
mutex
SharedPtr
size_t
SMRunMode
int64_t
SmaccStatus
recursive_mutex
type_info *
int
string