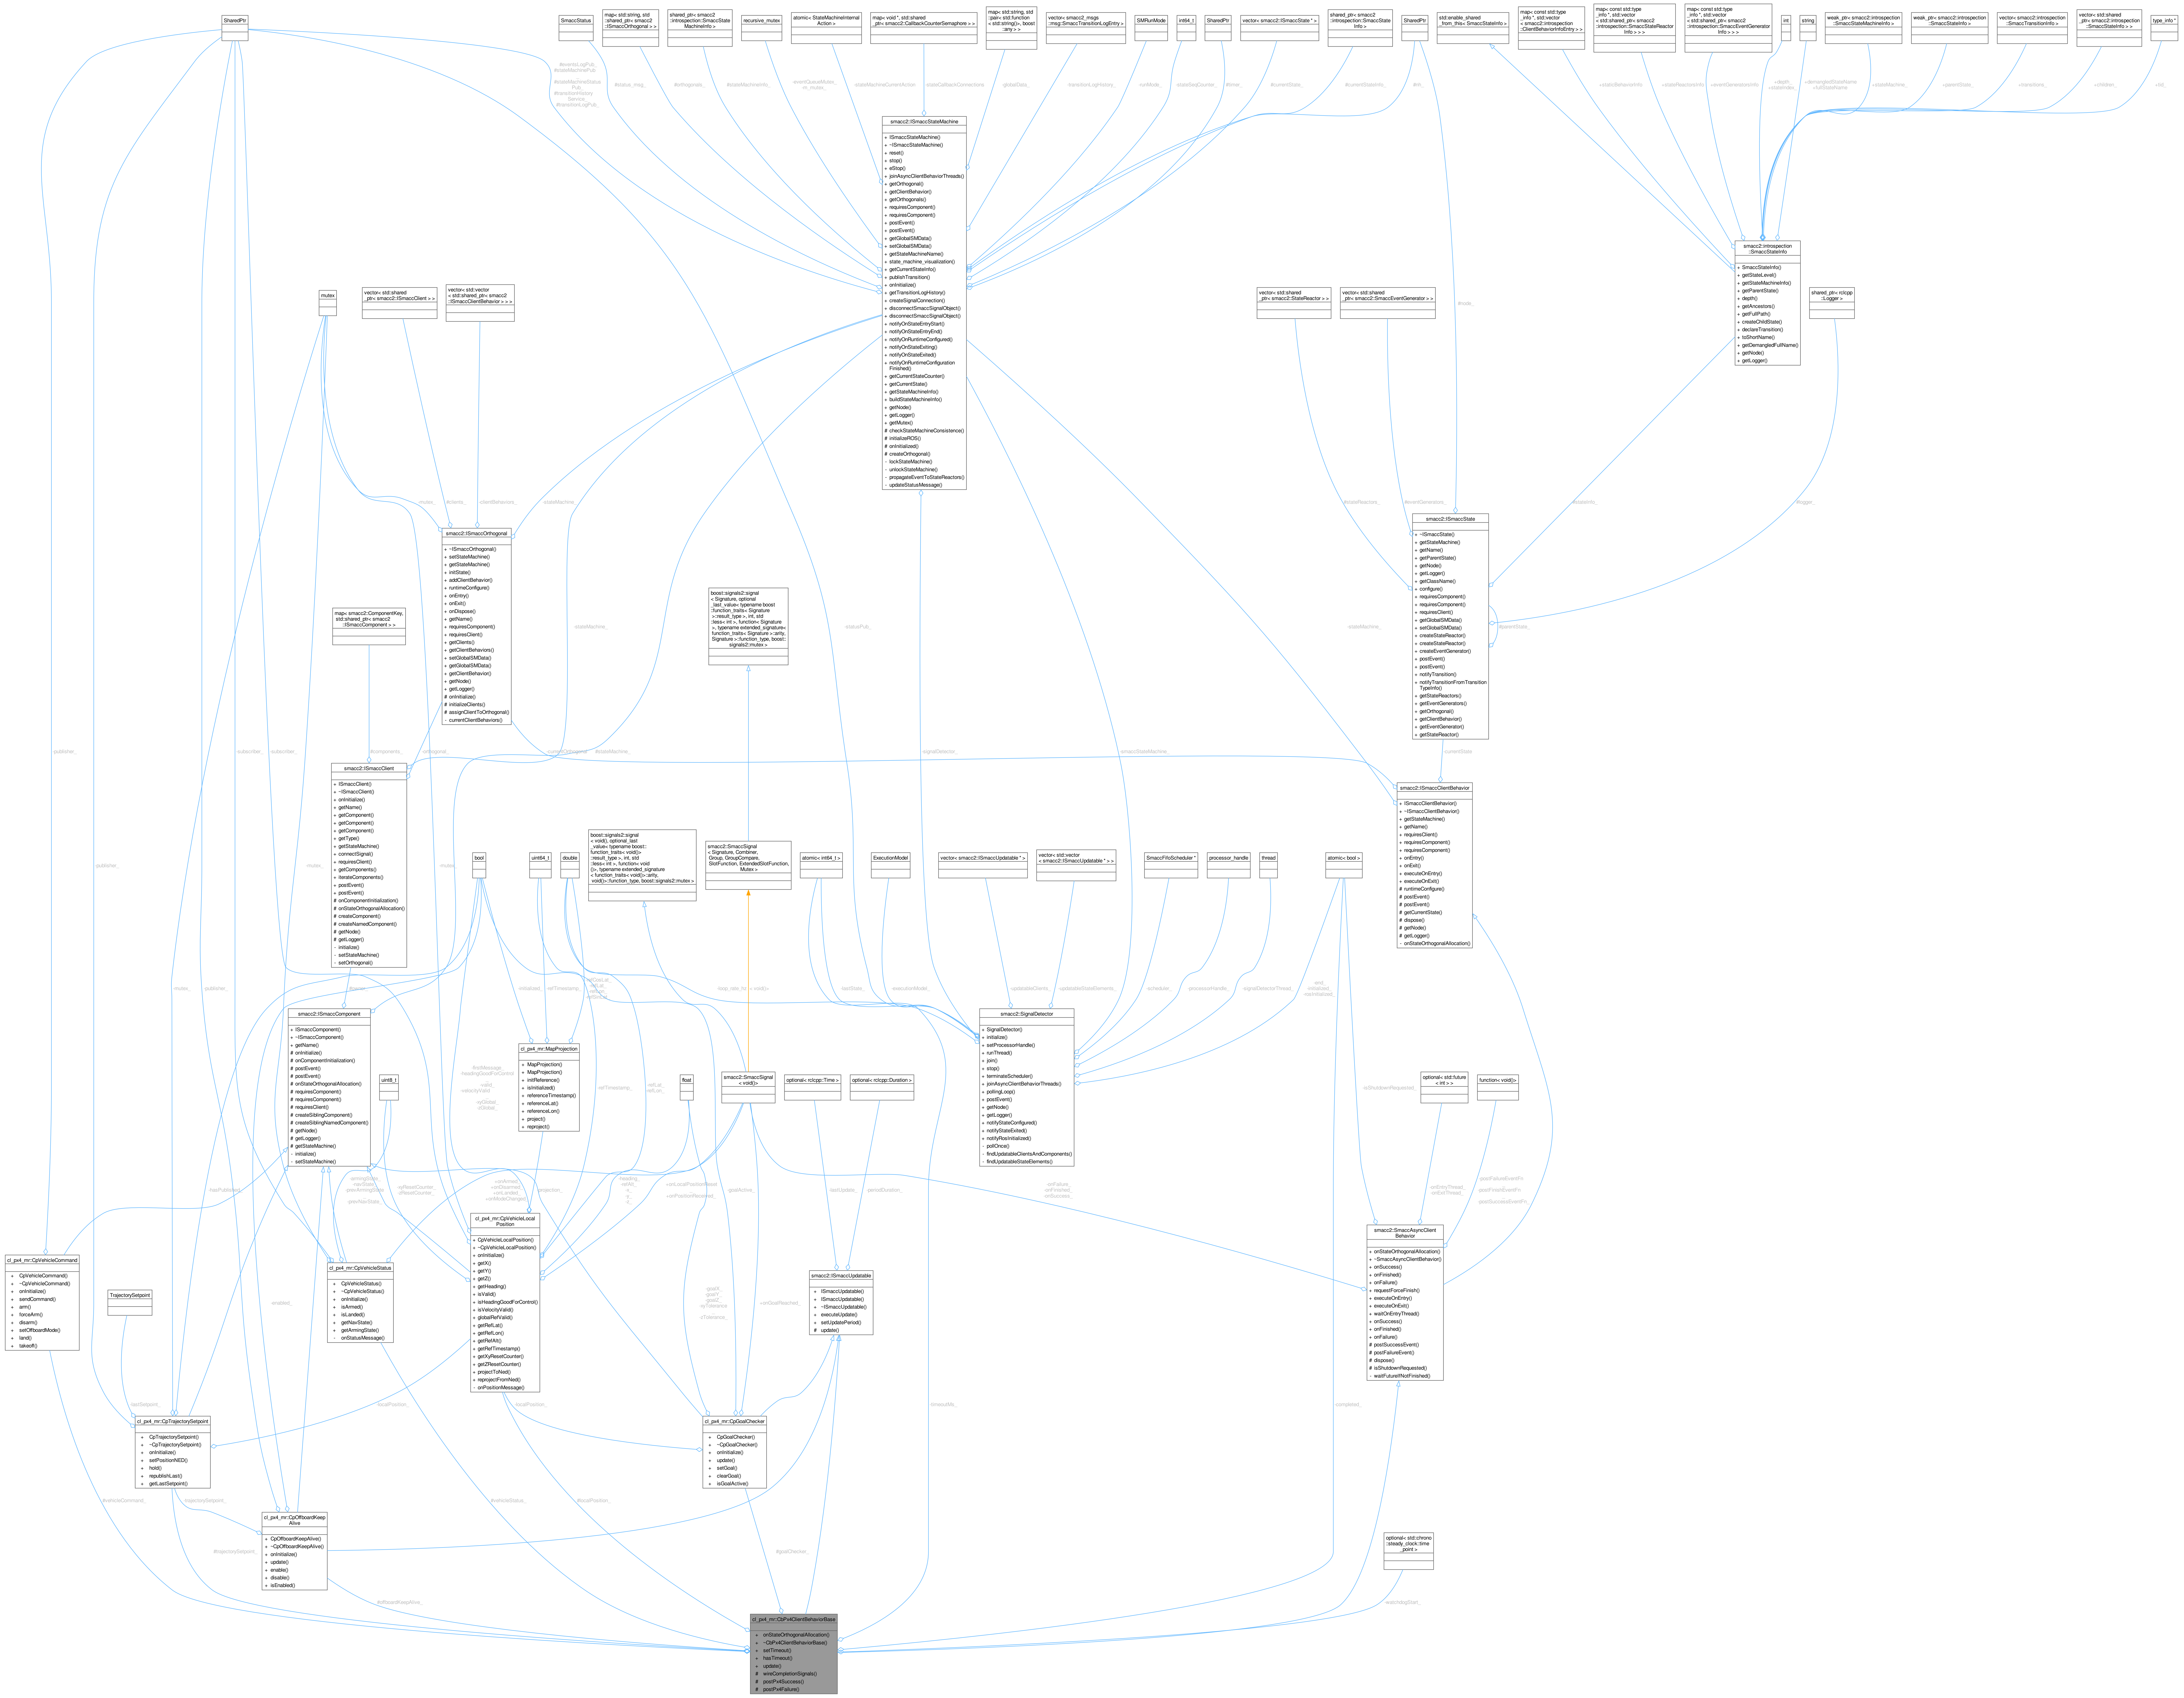
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#goalChecker_
#vehicleCommand_
#trajectorySetpoint_
#offboardKeepAlive_
#vehicleStatus_
#localPosition_
-timeoutMs_
-completed_
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
TrajectorySetpoint
-lastSetpoint_
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
-hasPublished_
-enabled_
-trajectorySetpoint_
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
-armingState_
-navState_
-prevArmingState_
-prevNavState_
-xyResetCounter_
-zResetCounter_
+onArmed_
+onDisarmed_
+onLanded_
+onModeChanged_
-projection_
-heading_
-refAlt_
-x_
-y_
-z_
cl_px4_mr::CpVehicleLocalPosition
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
-localPosition_
+onLocalPositionReset_
+onPositionReceived_
-goalActive_
-goalX_
-goalY_
-goalZ_
-xyTolerance_
-zTolerance_
+onGoalReached_
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
-lastUpdate_
-periodDuration_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
-onFailure_
-onFinished_
-onSuccess_
-onEntryThread_
-onExitThread_
-postFailureEventFn_
-postFinishEventFn_
-postSuccessEventFn_
smacc2::SmaccAsyncClientBehavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
optional< std::chrono::steady_clock::time_point >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
#components_
-orthogonal_
-currentOrthogonal
#stateMachine_
-signalDetector_
-subscriber_
-mutex_
#owner_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
bool
uint64_t
double
uint8_t
float
-initialized_
-refTimestamp_
-refCosLat_
-refLat_
-refLon_
-refSinLat_
-firstMessage_
-headingGoodForControl
-valid_
-velocityValid
-xyGlobal_
-zGlobal_
cl_px4_mr::MapProjection
+ MapProjection()
+ MapProjection()
+ initReference()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
boost::signals2::signal< void(), optional_last_value< typename boost::function_traits< void()>::result_type >, int, std::less< int >, function< void()>, typename extended_signature< function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
smacc2::SmaccSignal< void()>
-loop_rate_hz
< void()>
optional< rclcpp::Time >
optional< rclcpp::Duration >
atomic< int64_t >
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector< smacc2::ISmaccUpdatable * > >
-lastState_
-executionModel_
-updatableClients_
-updatableStateElements_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccOrthogonal
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
smacc2::ISmaccStateMachine
smacc2::ISmaccState
smacc2::ISmaccClientBehavior
smacc2::introspection::SmaccStateInfo