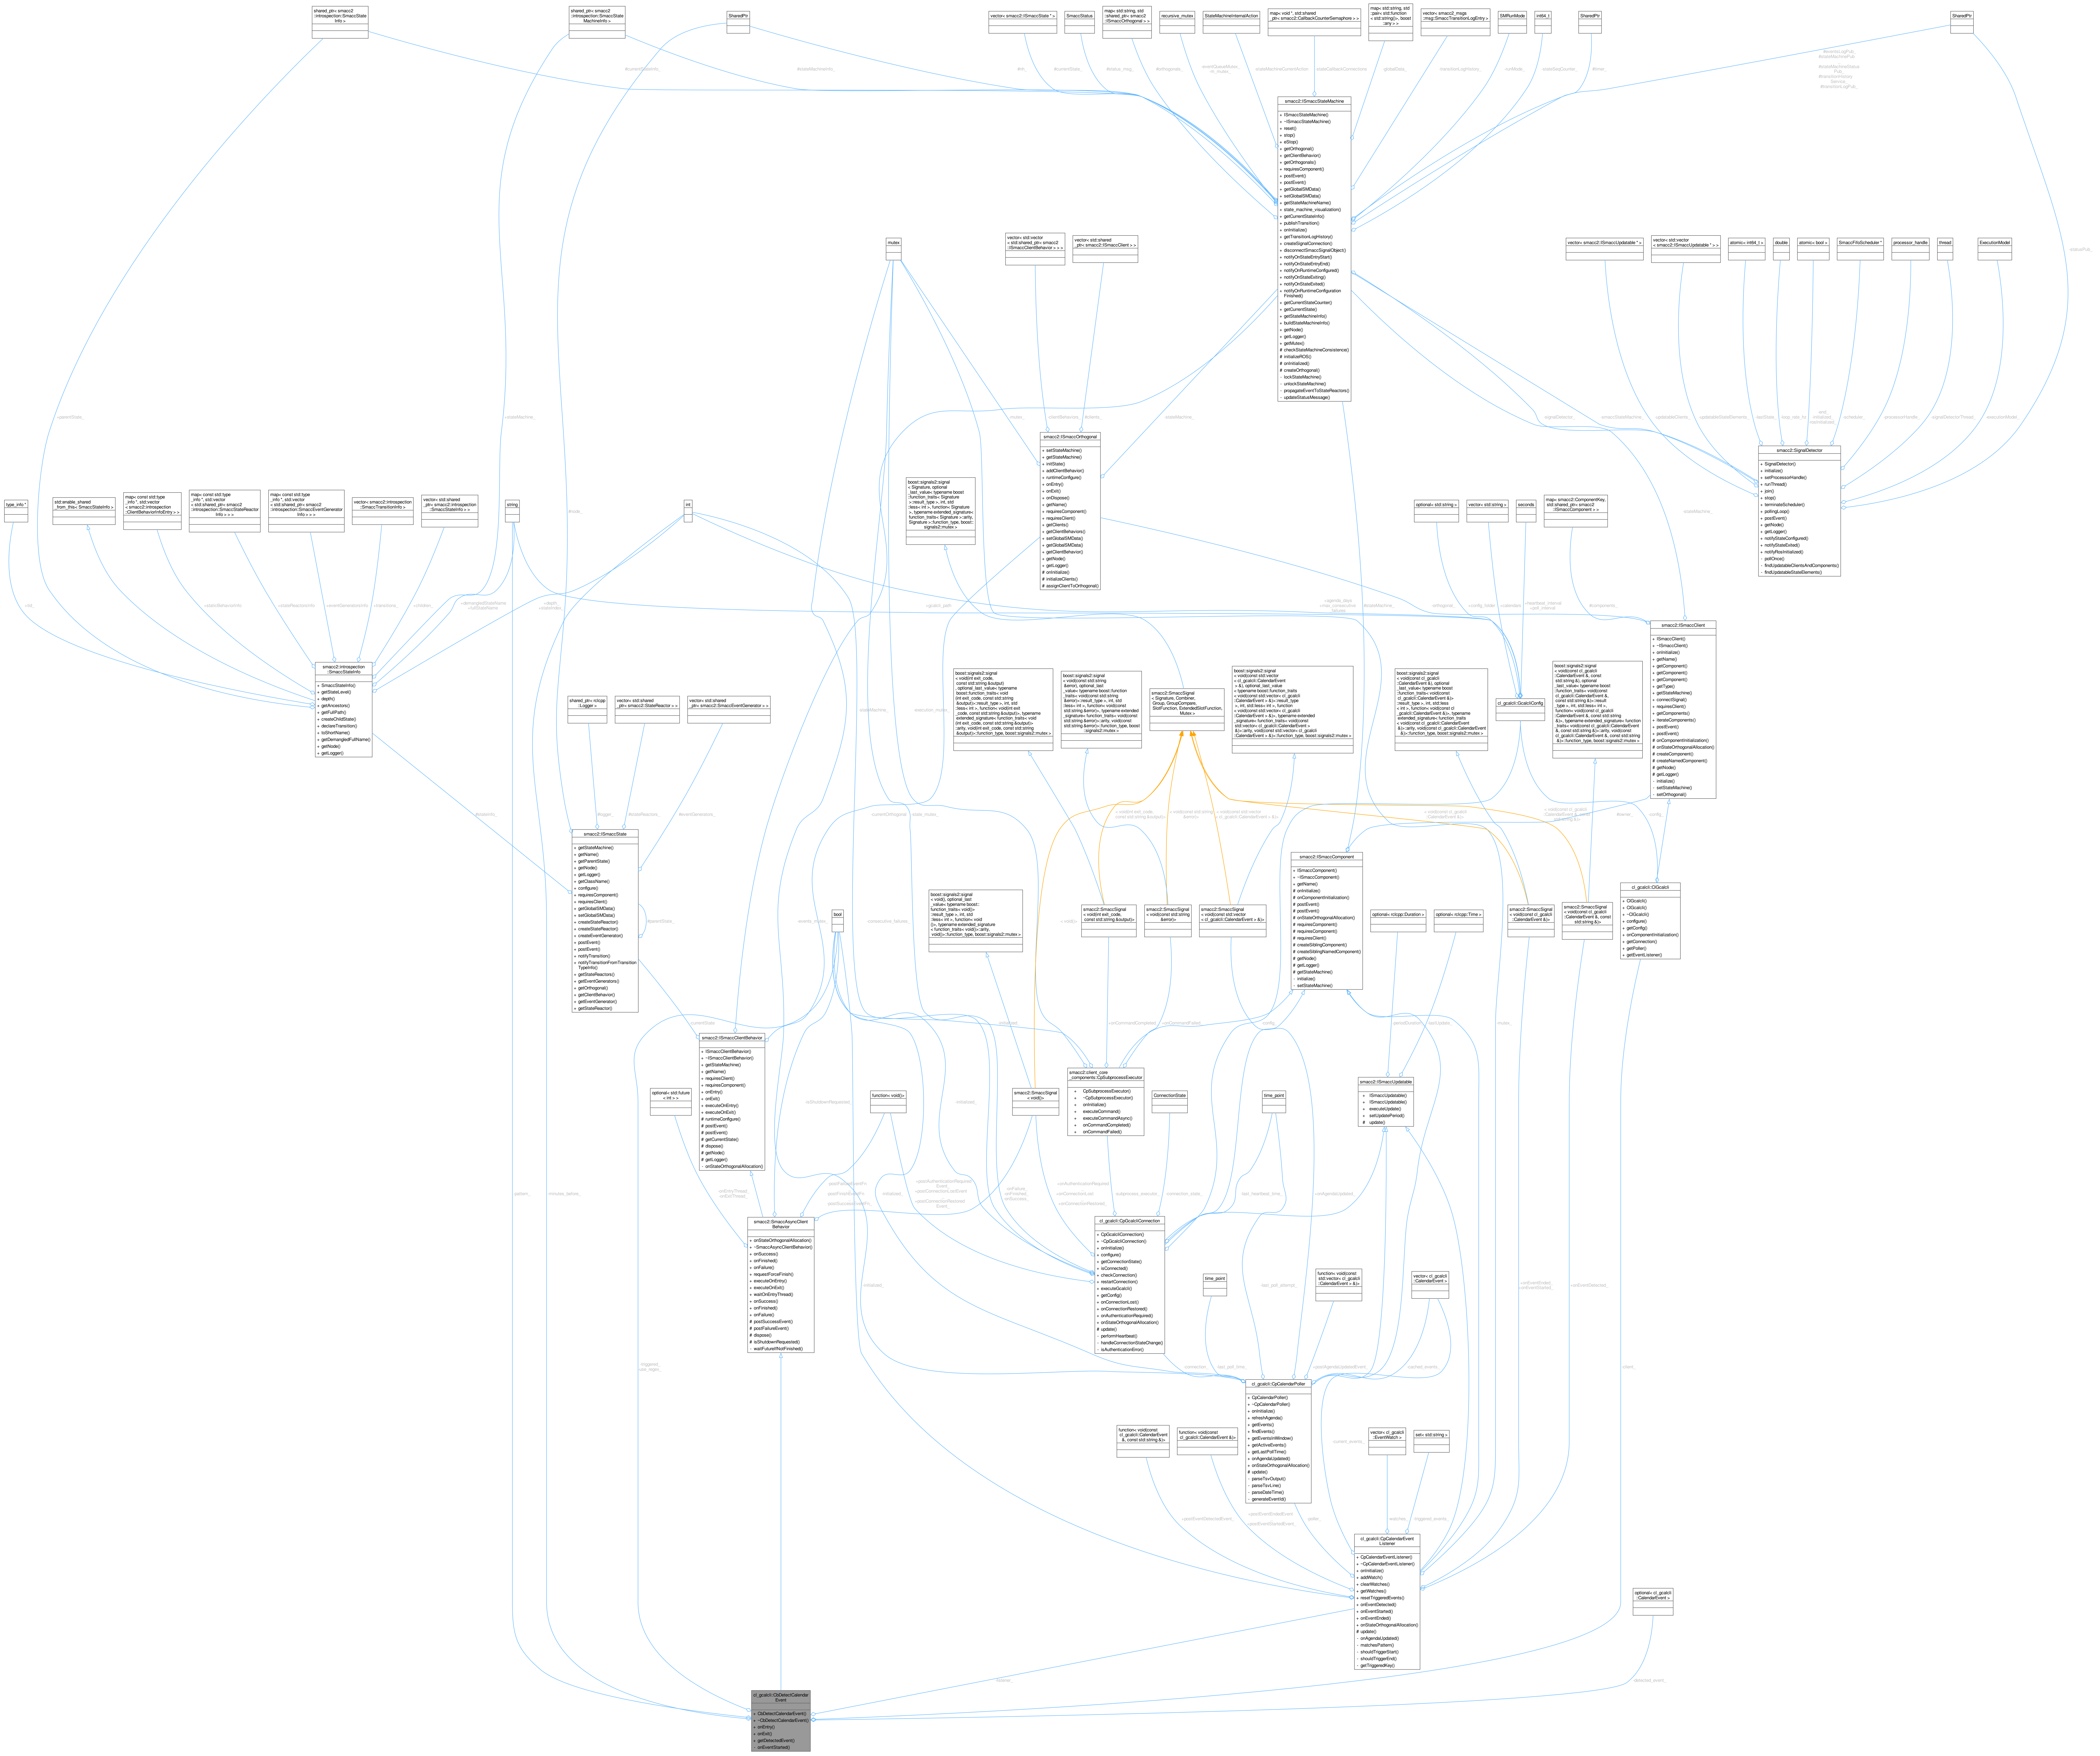
cl_gcalcli::CbDetectCalendarEvent
+ CbDetectCalendarEvent()
+ ~CbDetectCalendarEvent()
+ onEntry()
+ onExit()
+ getDetectedEvent()
- onEventStarted()
smacc2::SmaccAsyncClientBehavior
smacc2::ISmaccClientBehavior
smacc2::ISmaccState
smacc2::introspection::SmaccStateInfo
smacc2::ISmaccStateMachine
smacc2::ISmaccOrthogonal
smacc2::SignalDetector
smacc2::ISmaccClient
smacc2::ISmaccComponent
smacc2::ISmaccUpdatable
smacc2::client_core_components::CpSubprocessExecutor
smacc2::SmaccSignal< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
smacc2::SmaccSignal< void()>
smacc2::SmaccSignal< void(int exit_code, const std::string &output)>
smacc2::SmaccSignal< void(const std::string &error)>
smacc2::SmaccSignal< void(const std::vector< cl_gcalcli::CalendarEvent > &)>
smacc2::SmaccSignal< void(const cl_gcalcli::CalendarEvent &)>
smacc2::SmaccSignal< void(const cl_gcalcli::CalendarEvent &, const std::string &)>
cl_gcalcli::GcalcliConfig
cl_gcalcli::ClGcalcli
cl_gcalcli::CpGcalcliConnection
cl_gcalcli::CpCalendarPoller
cl_gcalcli::CpCalendarEventListener
shared_ptr< smacc2::introspection::SmaccStateInfo >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
SharedPtr
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
recursive_mutex
StateMachineInternalAction
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< std::string()>, boost::any > >
vector< smacc2_msgs::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
type_info *
std::enable_shared_from_this< SmaccStateInfo >
map< const std::type_info *, std::vector< smacc2::introspection::ClientBehaviorInfoEntry > >
map< const std::type_info *, std::vector< std::shared_ptr< smacc2::introspection::SmaccStateReactorInfo > > >
map< const std::type_info *, std::vector< std::shared_ptr< smacc2::introspection::SmaccEventGeneratorInfo > > >
vector< smacc2::introspection::SmaccTransitionInfo >
vector< std::shared_ptr< smacc2::introspection::SmaccStateInfo > >
string
int
mutex
bool
vector< std::vector< std::shared_ptr< smacc2::ISmaccClientBehavior > > >
vector< std::shared_ptr< smacc2::ISmaccClient > >
shared_ptr< rclcpp::Logger >
vector< std::shared_ptr< smacc2::StateReactor > >
vector< std::shared_ptr< smacc2::SmaccEventGenerator > >
vector< smacc2::ISmaccUpdatable * >
vector< std::vector< smacc2::ISmaccUpdatable * > >
atomic< int64_t >
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
optional< std::string >
vector< std::string >
seconds
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
optional< std::future< int > >
function< void()>
ConnectionState
time_point
optional< rclcpp::Duration >
optional< rclcpp::Time >
function< void(const std::vector< cl_gcalcli::CalendarEvent > &)>
vector< cl_gcalcli::CalendarEvent >
function< void(const cl_gcalcli::CalendarEvent &, const std::string &)>
function< void(const cl_gcalcli::CalendarEvent &)>
vector< cl_gcalcli::EventWatch >
set< std::string >
optional< cl_gcalcli::CalendarEvent >
+parentState_
+stateMachine_
#currentStateInfo_
#stateMachineInfo_
#node_
+tid_
+staticBehaviorInfo
+stateReactorsInfo
+eventGeneratorsInfo
+transitions_
+children_
+demangledStateName
+fullStateName
+depth_
+stateIndex_
#stateInfo_
#logger_
#stateReactors_
#eventGenerators_
#parentState_
-currentState
#nh_
#currentState_
#status_msg_
#orthogonals_
-eventQueueMutex_
-m_mutex_
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-runMode_
-stateSeqCounter_
#timer_
#eventsLogPub_
#stateMachinePub_
#stateMachineStatusPub_
#transitionHistoryService_
#transitionLogPub_
-statusPub_
-mutex_
-clientBehaviors_
#clients_
-stateMachine_
-signalDetector_
-smaccStateMachine_
-updatableClients_
-updatableStateElements_
-lastState_
-loop_rate_hz
-end_
-initialized_
-rosInitialized_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionModel_
+gcalcli_path
+agenda_days
+max_consecutive_failures
#stateMachine_
-orthogonal_
+config_folder
+calendars
+heartbeat_interval
+poll_interval
#components_
#owner_
-config_
-currentOrthogonal
-state_mutex_
-events_mutex_
-consecutive_failures_
-execution_mutex_
< void()>
< void(int exit_code, const std::string &output)>
< void(const std::string &error)>
< void(const std::vector< cl_gcalcli::CalendarEvent > &)>
< void(const cl_gcalcli::CalendarEvent &)>
< void(const cl_gcalcli::CalendarEvent &, const std::string &)>
+onCommandCompleted
+onCommandFailed
-initialized_
-isShutdownRequested_
-onEntryThread_
-onExitThread_
-postFailureEventFn
-postFinishEventFn
-postSuccessEventFn_
+postAuthenticationRequiredEvent_
+postConnectionLostEvent
+postConnectionRestoredEvent
-onFailure_
-onFinished_
-onSuccess_
+onAuthenticationRequired
+onConnectionLost
+onConnectionRestored_
-subprocess_executor_
-connection_state_
-last_heartbeat_time_
+onAgendaUpdated_
-periodDuration_
-lastUpdate_
-config_
-mutex_
+onEventEnded_
+onEventStarted_
+onEventDetected_
-client_
-last_poll_attempt_
-connection_
-last_poll_time_
+postAgendaUpdatedEvent_
-cached_events_
-current_events_
+postEventDetectedEvent_
+postEventEndedEvent
+postEventStartedEvent_
-poller_
-watches_
-triggered_events_
-pattern_
-minutes_before_
-triggered_
-use_regex_
-listener_
-detected_event_