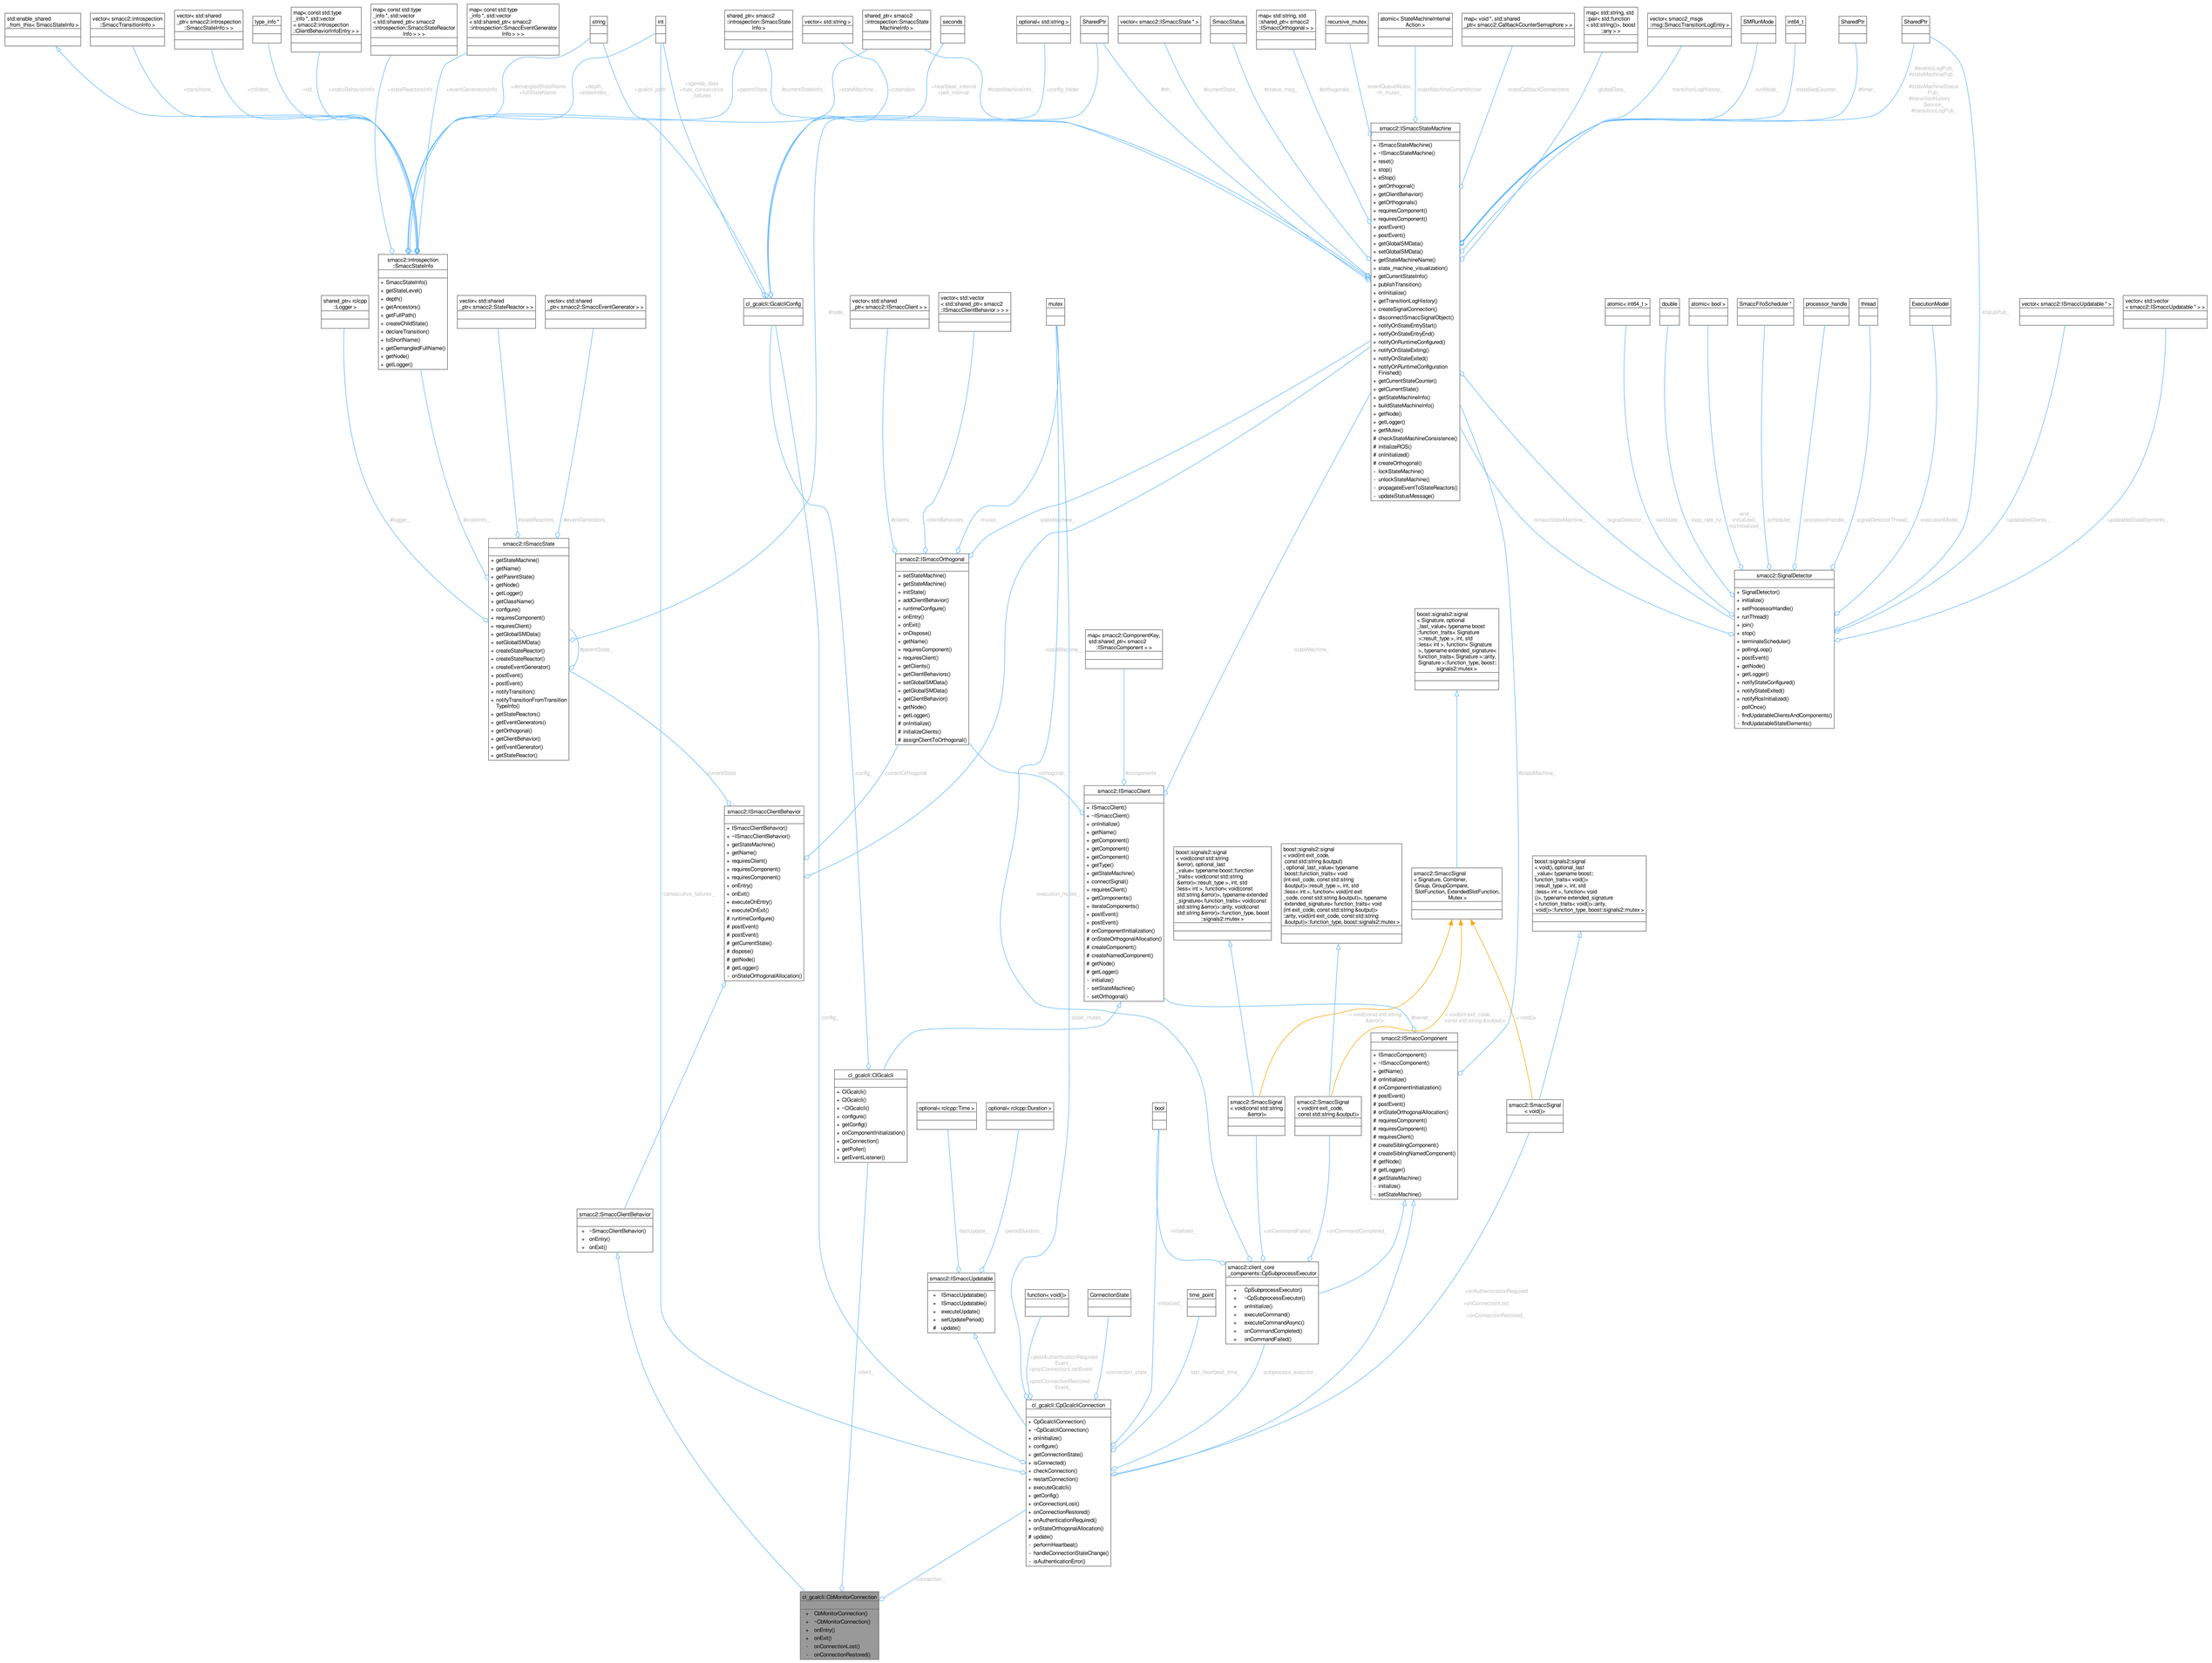
std::enable_shared
_from_this< SmaccStateInfo >
vector< smacc2::introspection
::SmaccTransitionInfo >
vector< std::shared
_ptr< smacc2::introspection
::SmaccStateInfo > >
type_info *
map< const std::type
_info *, std::vector
< smacc2::introspection
::ClientBehaviorInfoEntry > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccStateReactor
Info > > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccEventGenerator
Info > > >
string
int
shared_ptr< smacc2
::introspection::SmaccStateInfo >
vector< std::string >
shared_ptr< smacc2
::introspection::SmaccStateMachineInfo >
seconds
optional< std::string >
SharedPtr
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
recursive_mutex
atomic< StateMachineInternal
Action >
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std
::pair< std::function
< std::string()>, boost
::any > >
vector< smacc2_msgs
::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
SharedPtr
+transitions_
+children_
+id_
+staticBehaviorInfo
+stateReactorsInfo
+eventGeneratorsInfo
+demangledStateName
+fullStateName
+depth_
+stateIndex_
+gcalcli_path
+agenda_days
+max_consecutive
_failures
+parentState_
#currentStateInfo_
+stateMachine_
+calendars
+heartbeat_interval
+poll_interval
#stateMachineInfo_
+config_folder
#ini_
#currentState_
#status_msg_
#orthogonals_
-eventQueueMutex
-m_mutex_
+stateMachineCurrentAction
+stateCallbackConnections
-globalData_
-transitionLogHistory_
-runMode_
-stateSeqCounter_
#timer_
#eventsLogPub_
#stateMachinePub_
#stateMachineStatus
Pub_
#transitionHistory
Service_
#transitionLogPub_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ oninitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# oninitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection
::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
shared_ptr< rclcpp
::Logger >
vector< std::shared
_ptr< smacc2::ISmaccStateReactor > >
vector< std::shared
_ptr< smacc2::SmaccEventGenerator > >
cl_gcalcli::GcalcliConfig
#node_
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
mutex
atomic< int64_t >
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
#logger_
#stateInfo_
#stateReactors_
#eventGenerators_
#clients_
#clientBehaviors_
+mutex_
-stateMachine_
-smaccStateMachine_
-signalDetector_
-lastState_
loop_rate_hz
-end_
-initialized_
-wasInitialized_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-updatableStateElements_
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition
TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#parentState_
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
+ oninitialize()
# initializeClients()
# assignClientToOrthogonal()
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
-stateMachine_
-stateMachine_
boost::signals2::signal
< Signature, optional
_last_value< typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity,
Signature >::function_type, boost::
signals2::mutex >
smacc2::ISmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(), optional_last
_value< typename boost::
function_traits< void()>
::result_type >, int, std
::less< int >, function< void
()>, typename extended_signature
< function_traits< void()>::arity,
void()>::function_type, boost::signals2::mutex >
smacc2::ISmaccSignal
< void()>
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ oninitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
boost::signals2::signal
< void(const std::string
&error), optional_last
_value< typename boost::function
_traits< void(const std::string
&error)>::result_type >, int, std
::less< int >, function< void(const
std::string &error)>, typename extended
_signature< function_traits< void(const
std::string &error)>::arity, void(const
std::string &error)>::function_type, boost
::signals2::mutex >
boost::signals2::signal
< void(int exit_code,
const std::string &output)
, optional_last_value< typename
boost::function_traits< void
(int exit_code, const std::string
&output)>::result_type >, int, std
::less< int >, function< void(int exit
_code, const std::string &output)>, typename
extended_signature< function_traits< void
(int exit_code, const std::string &output)>
::arity, void(int exit_code, const std::string
&output)>::function_type, boost::signals2::mutex >
-> void(const std::string
&error)>
#owner_
-> void(int exit_code,
const std::string &output)>
-> void()>
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# oninitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
-consecutive_failures_
-config_
-state_mutex_
-execution_mutex_
cl_gcalcli::ClGcalcli
+ ClGcalcli()
+ ClGcalcli()
+ ~ClGcalcli()
+ configure()
+ getConfig()
+ onComponentInitialization()
+ getConnection()
+ getPoller()
+ getEventListener()
optional< rclcpp::Time >
optional< rclcpp::Duration >
bool
smacc2::SmaccSignal
< void(const std::string
&error)>
smacc2::SmaccSignal
< void(int exit_code,
const std::string &output)>
smacc2::SmaccSignal
< void()>
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
function< void()>
ConnectionState
time_point
smacc2::client_core
_components::CpSubprocessExecutor
+ CpSubprocessExecutor()
+ ~CpSubprocessExecutor()
+ onInitialize()
+ executeCommand()
+ executeCommandAsync()
+ onCommandCompleted()
+ onCommandFailed()
boost::signals2::signal
< Signature, optional
_last_value< typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity,
Signature >::function_type, boost::
signals2::mutex >
-stateMachine_
-initialized_
-onCommandFailed_
-onCommandCompleted_
-lastUpdate_
-periodDuration_
-initialized_
+onAuthenticationRequired
+onConnectionLost
+onConnectionRestored_
-client_
-currentState
-config_
-currentOrthogonal
-orthogonal_
-components_
-postAuthenticationRequired
Event_
-postConnectionLostEvent
-postConnectionRestored
Event_
-connection_state_
last_heartbeat_time_
-subprocess_executor_
cl_gcalcli::ClpGcalcliConnection
+ ClpGcalcliConnection()
+ ~ClpGcalcliConnection()
+ oninitialize()
+ configure()
+ getConnectionState()
+ isConnected()
+ checkConnection()
+ restartConnection()
+ executeGcalcli()
+ getConfig()
+ onConnectionLost()
+ onConnectionRestored()
+ onAuthenticationRequired()
+ onStateOrthogonalAllocation()
# update()
- performHeartbeat()
- handleConnectionStateChange()
- isAuthenticationError()
-connection_
cl_gcalcli::ClbMonitorConnection
+ ClbMonitorConnection()
+ ~ClbMonitorConnection()
+ onEntry()
+ onExit()
- onConnectionLost()
- onConnectionRestored()