


smacc2::ISmaccOrthogonal  
::setStateMachine

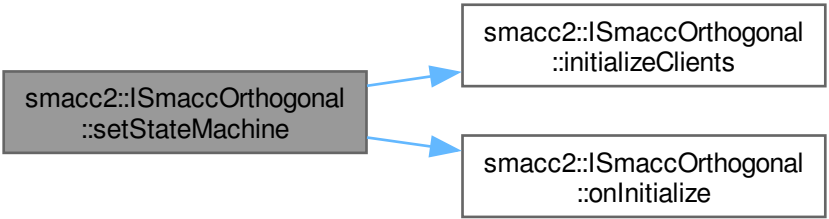

```
graph LR; A[smacc2::ISmaccOrthogonal::setStateMachine] --> B[smacc2::ISmaccOrthogonal::initializeClients]; A --> C[smacc2::ISmaccOrthogonal::onInitialize];
```

The diagram illustrates a method call sequence. A grey box on the left, labeled 'smacc2::ISmaccOrthogonal::setStateMachine', has two blue arrows pointing to two white boxes on the right. The top white box is labeled 'smacc2::ISmaccOrthogonal::initializeClients' and the bottom white box is labeled 'smacc2::ISmaccOrthogonal::onInitialize'.

smacc2::ISmaccOrthogonal  
::initializeClients

smacc2::ISmaccOrthogonal  
::onInitialize